TSS

BoPP transparent film, both sides heat sealable, treated

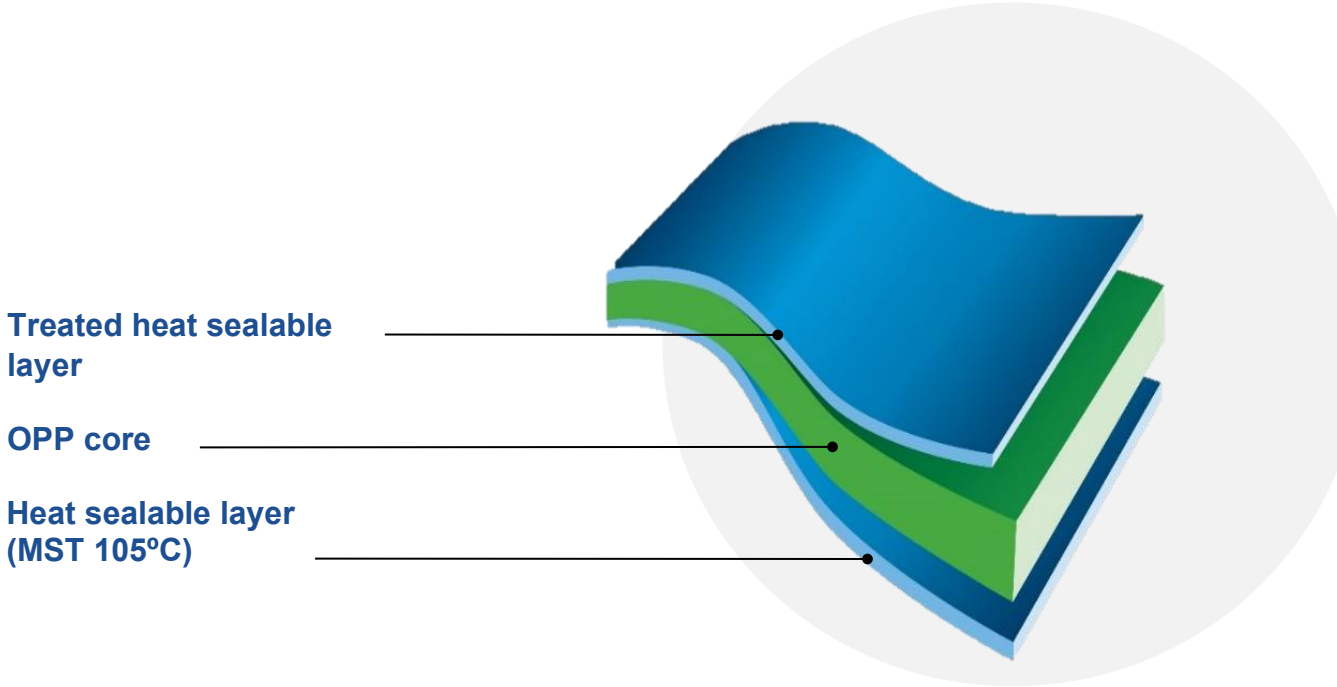

PROPERTIES

- Heat sealable on both sides
- Good mechanical properties
- Good moisture barrier
- Good antistatic and slip properties

TYPICAL APPLICATIONS

- Rotogravure and flexographic (non-UV and non-water base) printing
- Lamination
- Single web structure
- HFFS & VFFS packaging

FILM	STANDARD LENGTH (m)	4x (m)	6x (m)	8x (m)
TSS 15	4,250	17,000	25,500	34,000
TSS 17	3,750	15,000	22,500	30,000
TSS 18	3,550	14,200	21,300	28,400
TSS 20	3,200	12,800	19,200	25,600
TSS 25	2,550	10,200	15,300	20,400
TSS 30	2,100	8,400	12,600	16,800
TSS 35	1,800	7,200	10,800	14,400
TSS 40	1,600	6,400	9,600	12,800
TSS 45	1,400	5,600	8,400	11,200
Outside Diameter – core 76 mm	**305 mm**	**588 mm**	**716 mm**	**825 mm**
Outside Diameter – core 152 mm	**337 mm**	**605 mm**	**730 mm**	**838 mm**

*Regional availability of roll sizes (multiples of standard length)-please refer to the corresponding Sales Representative

TSS

PROPERTIES	METHOD	UNIT	REF.	TYPICAL VALUES								
Nominal thickness	Internal method	µm		15	17	18	20	25	30	35	40	45
Unit weight		g/m^2		13.7	15.5	16.4	18.2	22.8	27.3	31.9	36.4	40.9
Yield		m^2/kg		73.3	64.5	61.0	54.9	44.0	36.6	31.4	27.5	24.2
Tensile strength	ASTM D882	N/mm^2	MD TD	140 280								
Elongation at break		%	MD TD	180 50								
Haze	ASTM D1003	%		2.0			2.3			2.6		
Gloss (45°)	ASTM D2457	Gloss Unit		85								
Dynamic cof	ASTM D1894		NT/NT	0.25								
Thermal shrinkage	Internal method (130°C; 5 mins)	%	MD TD	6.0 3.0								
Heat seal range	Internal method	°C		105 - 140								
Seal strength	Internal method 130°C ;0.5s,1bar	g/cm	NT/ NT	170			230			300		
Treatment level	ASTM D2578	mN/m		38								
Water vapour permeability	ASTM F1249 (38°C – 90 RH)	$g/ m^2/d$		9.0	7.5	7.0	6.0	5.0	4.0	3.5	3.1	

TOLERANCE		
Weight	≤ 1.000 kg 1.001-10.000 kg > 10.000 kg	± 20% ± 10% ± 5%

STORAGE, HANDLING AND APPLICATION

TSS film does not require special storage conditions. A storage temperature between 20ºC to 30°C is recommended in order to minimise the deterioration of the film properties in general. It is advisable to turn over the inventory according to the delivery dates (first in-first out). The film should be conditioned in the operating environment for at least 24 hours before processing. TSS film is suitable for use up to 6 months from the date of production.

INDICATION OF SURFACE TREATMENT

TSS film is usually supplied with the treatment on the outside surface (TO).
TSS can be supplied either with treatment on the inside surface (TI). This must be agreed with our sales representative before processing the order.

FOOD CONTACT

TSS film complies with EC and FDA regulations. Specific document and MSDS are available upon request.

The property values represented in the table do not constitute product specifications but represent the average or typical values. Use of this information is limited to the specific recipient. While the information is accurate to the best of our knowledge as of the date compiled, it is limited to the information as specified. No representation or warranty, expressed or implied, is made regarding the information, or its completeness or fitness to a particular use. The user is solely responsible for all determinations regarding use and we disclaim liability for any loss or damage that may occur from the use of this information. *Ti* does not guarantee the typical (or other) values.

Last Update: 2026/02/A

staff@ti-films.com • ti-films.com