iNRT140

Transparent Non-Heat Sealable, Heat Resistant Film

Gulf Pack
TRANSPARENT BOPP FILM

DESCRIPTION:
Gulf Pack iNRT140 is a Transparent Non-Heat Sealable film with improved heat resistance and thermal stability.

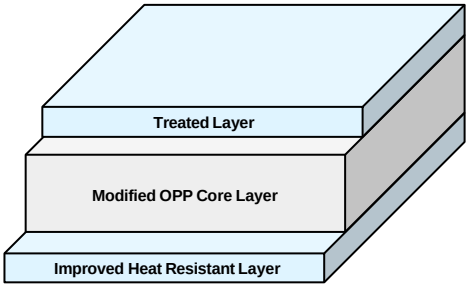

PRODUCTFEATURES:
Sustainable & recyclable solution (polyolefin laminate structure/same family)
Improved Heat Resistance
Improved Thermal Stability
Good Mechanical Properties
Good Optical Properties

APPLICATIONS:
Outer-Web of Packaging Laminations
BOPET Replacement
BOPP/CPP or BOPP/PE structures are suitable for replacement of PET/PE
Suitable for high speed FFS machine

PROPERTIES			UNIT	TYPICALVALUES			TEST METHOD
PHYSICAL	Thickness		Microns	15	18	20	ASTM D 374
			Gauge	*60*	*72*	*80*	
	Grammage		g/m²	13.65	16.38	18.2	*GPIM
			lbs/ream	*8.4*	*10.1*	*11.18*	
	Yield		m²/kg	73.26	61.05	54.95	
			in²/lb	*51,600*	*43,000*	*38,630*	
	Kinetic Coefficient of Friction (UT-UT)			0.25			ASTM D 1894
	Surface Tension		dynes/cm	40			ASTM D 2578
OPTICAL	Haze		%	2.0			ASTM D 1003
	Gloss (45°)			92			ASTM D 2457
MECHANICAL	Tensile Strength at Break	*MD	kg/mm²	15			ASTM D 882
		'TD		28			
		MD	*psi*	*22,757*			
		TD		*39,816*			
	Elongation at Break	MD	%	180			ASTM D 882
		TD		50			
THERMAL	Thermal Shrinkage	MD	%	2.5			GPIM (120oC (248°F), 5 min, air)
		TD		0.5			
BARRIER	Water Vapor Permeability		g/m²/24h	7.1	6.8	6.5	ASTM F 1249 (38°C / 90% RH)
	(W.V.T.R.)		*g/100in²/24h*	0.51	0.45	0.4	

*GPIM – Gulf Pack Internal Method *MD – Machine Direction *TD – Transverse Direction

Recommendation: *Easy jaw release (Minor machine modifications to be made in terms of teflon coated retractable heat-sealing jaws to accommodate BOPP film in place of BOPET film)*

Gulf Pack iNRT140 films comply with EU Regulation 10/2011/EC and USA FDA Code of Federal Regulations CFR21 section 177.1520 (c) 1.1 and are suitable for use in packaging, carrying and transporting foodstuffs.

The information contained in this technical leaflet illustrates typical values only and are to the best of our knowledge. Since the conditions under which our films may be used are beyond our control, such values are declared without warranty or guarantee.

Bi-axially oriented polypropylene films age with time and will exhibit deterioration of some properties if not stored in a suitable environment at a temperature 30°C or below. We strongly advise our customers to use recommended storage conditions and consume products before 6 months from date of production in our plant.

Detailed advice regarding other specific applications of **Gulf Pack iNRT140** and other films in the Gulf Pack range is available upon request.