Flexible Packaging
Technical Data Sheet
17.09.2018

WALKI®Seal 99

C1S paper 50 / PE / Alu / PE 20

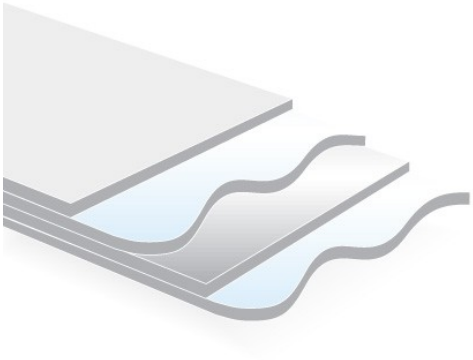

- Designed for applications where paper side of the laminate is printed
- To be used in heat sealable applications
- Excellent aroma, gas / grease, water vapour and light barrier
- Suitable to be used in all the most common printing methods (flexo, offset, rotogravure etc.)
- Paper quality to be chosen according to printing demands
- Good organoleptic

Applications

WALKI®Seal is aluminium based barrier laminate for pouches. Typical applications are e.g. pudding powders, dehydrated soups, spices, pharmaceutical products.

Food Safety

All materials used in WALKI®Seal are suitable for food packaging in accordance with BfR and / or EU requirements. The total content of heavy metals in the raw materials is in compliance with EU directive 94/62/EC (<100ppm).

Typical Characteristics

PROPERTY	TEST METHOD	TEST CONDITIONS	UNITS		TYPICAL VALUES
Grammage	ISO 536	23°C 50% RH	g/m^2		99
Thickness	ISO 534	23°C 50% RH	µm		84
WVTR	ISO 2528	23°C 50% RH	g/m^2*d		< 0,1
OTR	DIN 53380-S	23°C 50% RH	cm^3/m^2*d		< 1
Tensile Strength	ISO 1924-2	23°C 50% RH	kN/m	MD	4,90
		23°C 50% RH	kN/m	CD	2,48
Tear Strength	ISO 1974	23°C 50% RH	mN	MD	465
		23°C 50% RH	mN	CD	515
Bursting Strength	ISO 2758	23°C 50% RH	kPa		180

All technical values are measured in our laboratory in conditions of 23°C 50%RH and are indicative

Recommended to be used within one year after dispatch from our factory. Optimum storage conditions are +20°C, 50 – 60 % relative humidity and covered with the original packaging, which contains a moisture barrier. Concentration level of heavy metals present complies with the demands of the directive 94/62/EC.
Customers are responsible for their own product testing, evaluation and safety procedures. Customers should contact Walki if they have any queries regarding safety procedures or end use applications.

Walki Oy - Henri Torkkola

Walki Sp. z o.o.
ul. Kiełczowska 74
51-315 Wrocław, Poland

Walki Oy
Radanvarsitie 9
FIN-37601 Valkeakoski, Finland

Certification:

DIN EN ISO 9001

ISO 22000

www.walki.com

firstname.lastname@walki.com