Fast shrink film, Grade: ELM55F

ELM55F is a heat-shrinkable polyvinylchloride film with excellent shrinking characteristics.

PVC FILM. Monoaxial Oriented Polyvinylchloride stretched Rigid Shrink Film.

CHARACTREISTICS:
- Transparent rigid PVC shrink film,impact modified.
- Suitable for screen, flexo and gravure printing.
- Film shows transverse shrinking up to 57%
- Suitable for high speed hot-air and IR shrink tunnels

APPLICATIONS:
- applicable in various shrinkable packaging, such as
- outer wrapping for plastic.
- glass bottles.
- cans and other kinds of containers.

Surface:	Glossy / glossy
Thickness:	40µm and 50 µm (0,04 and 0,05mm) / Others on request
Color:	Transparent, slightly bluish according internal visual standard

Shrinkage in Water Bath:	90°C, 3 seconds:	TD	55 +/- 3 %
		MD	max. 6%
	95°C, 3 seconds:	TD	57 +/- 3 %
		MD	max. 6%

Property		Value	Unit	Test method
Mechanical Properties				
Thickness tolerance		10	%	DIN 53370
Density		1,35 +/- 0,02	g/cm³	DIN 53479
Weight per unit area	50µm	68	g/sqm	Variance acc.to thickness tolerance
	40µm	54	g/sqm	Variance acc.to thickness tolerance
Tensile Strength(TD)		>48	Mpa	DIN EN ISO 527
Optical Properties				
Gloss value (60°)		90-120	%	ASTM D 523
Haze measurment		<2	%	ASTM D 1003
Surface Properties				
Surface tenstion		>32 both sides	mN/m	DIN 53364

*MD-Machine Direction *TD-Transverse Direction

Special Requirement:

The Product Corresponds to : Respective regulations and directives for food contact.

Width tolerance of slitted reels: ± 1mm

Reel dimensions: max. width: 1200mm max. diameter: 600mm

-Shelflife is 2 years after production date.
-Products stored under recommended conditions Storage of the film at max. 30°Cand relative humidity less than 70%.
- Do not expose to weather, in particular direct sunlight.

ELM FILMS

TECHNICAL DATA SHEET *(MONOAXIALLY ORIENTED POLYVINYLCHLORIDE FILM)*

Shrink graph for ELM PVC shrink film (performed at 45 µm film)

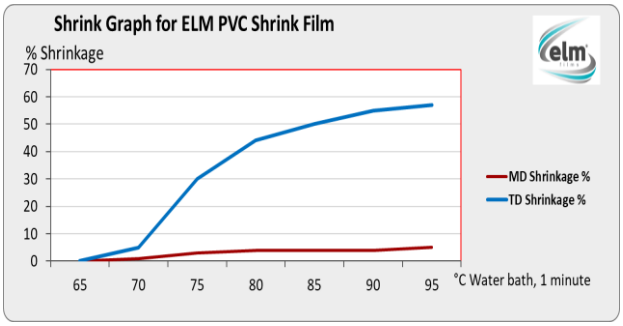

All typical physical properties listed above pertain to unformed transverse direction orientated PVC film. This information is believed to be correct, but does not constitute a warranty, guarantee or material specification. The customers must determine suitability for intended use of ELM's films. Sales of ELM's oriented PVC film are made pursuant to ELM's orders confirmation and sales terms and conditions.

**TDS issued on 03-2022.All previous version of this grade are invalid.
Website: www.elm-films.com