PVC SHRINK FILM TECHNICAL DATA SHEET

APPLIED FOR PVC SHRINK SLEEVE LABEL		
Thickness	30~75micron Thickness Tolerance +/-15% Average Roll Thickness Tolerance ±1u	ASTM D374
Width	Max width：1200mm Width Tolerance: +0~7 ㎜	/
Meters and Splice	Meter difference±100m Splice per Roll ≤1 Splice Percent Per Shipment≤30%	/
Shrinkage MD	Technical Range:≤5% Difference：±2	Dippcd into hot water at100℃，8seconds
Shrinkage TD	Technical Range:48~55% Difference：±2	Dippcd into hot water at100℃，8seconds
Internal Core Diameter	76/152 mm	/
Surface	Good surface without Contamination	ASTM DI 003
Physical Properties	Elongation percentage(%) MD≥65 TD≥55 Tear strength(KN/M) MD≥55 TD≥45 Tensile Strength (mpa) MD≥42.0 TD≥50.0 Haze (%) ≤2 Density: 1.38 g/cm³	ASTM D882
Storage	Storage temperature under 25℃, avoid exposing directly to the sunshine.	/

SHRINKAGE CURVES OF PVC SHRINK FILM IN TD & MD
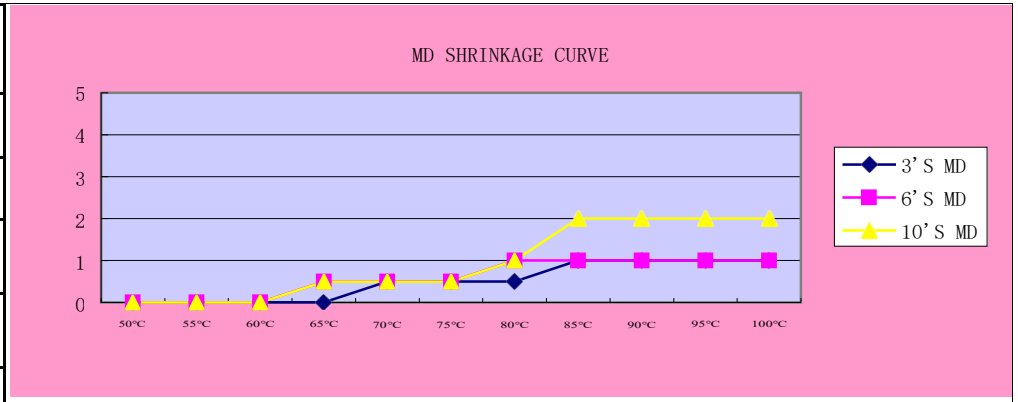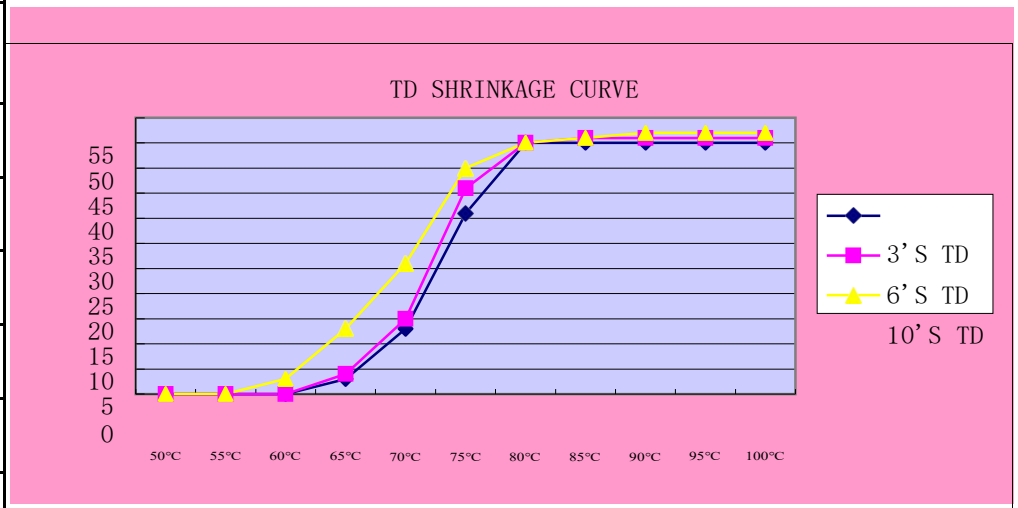
Tested from 35u in water						
TEMP	3'S		6'S		10'S	
	MD	TD	MD	TD	MD	TD
50°C	0	0	0	0	0	0
55°C	0	0	0	0	0	0
60°C	0	0	0	0	0	3
65°C	0	3	0.5	4	0.5	13
70°C	0.5	13	0.5	15	0.5	26
75°C	0.5	36	0.5	41	0.5	45
80°C	0.5	50	1	50	1	50
85°C	1	50	1	51	2	51
90°C	1	50	1	51	2	52
95°C	1	50	1	51	2	52
100°C	1	50	1	51	2	52