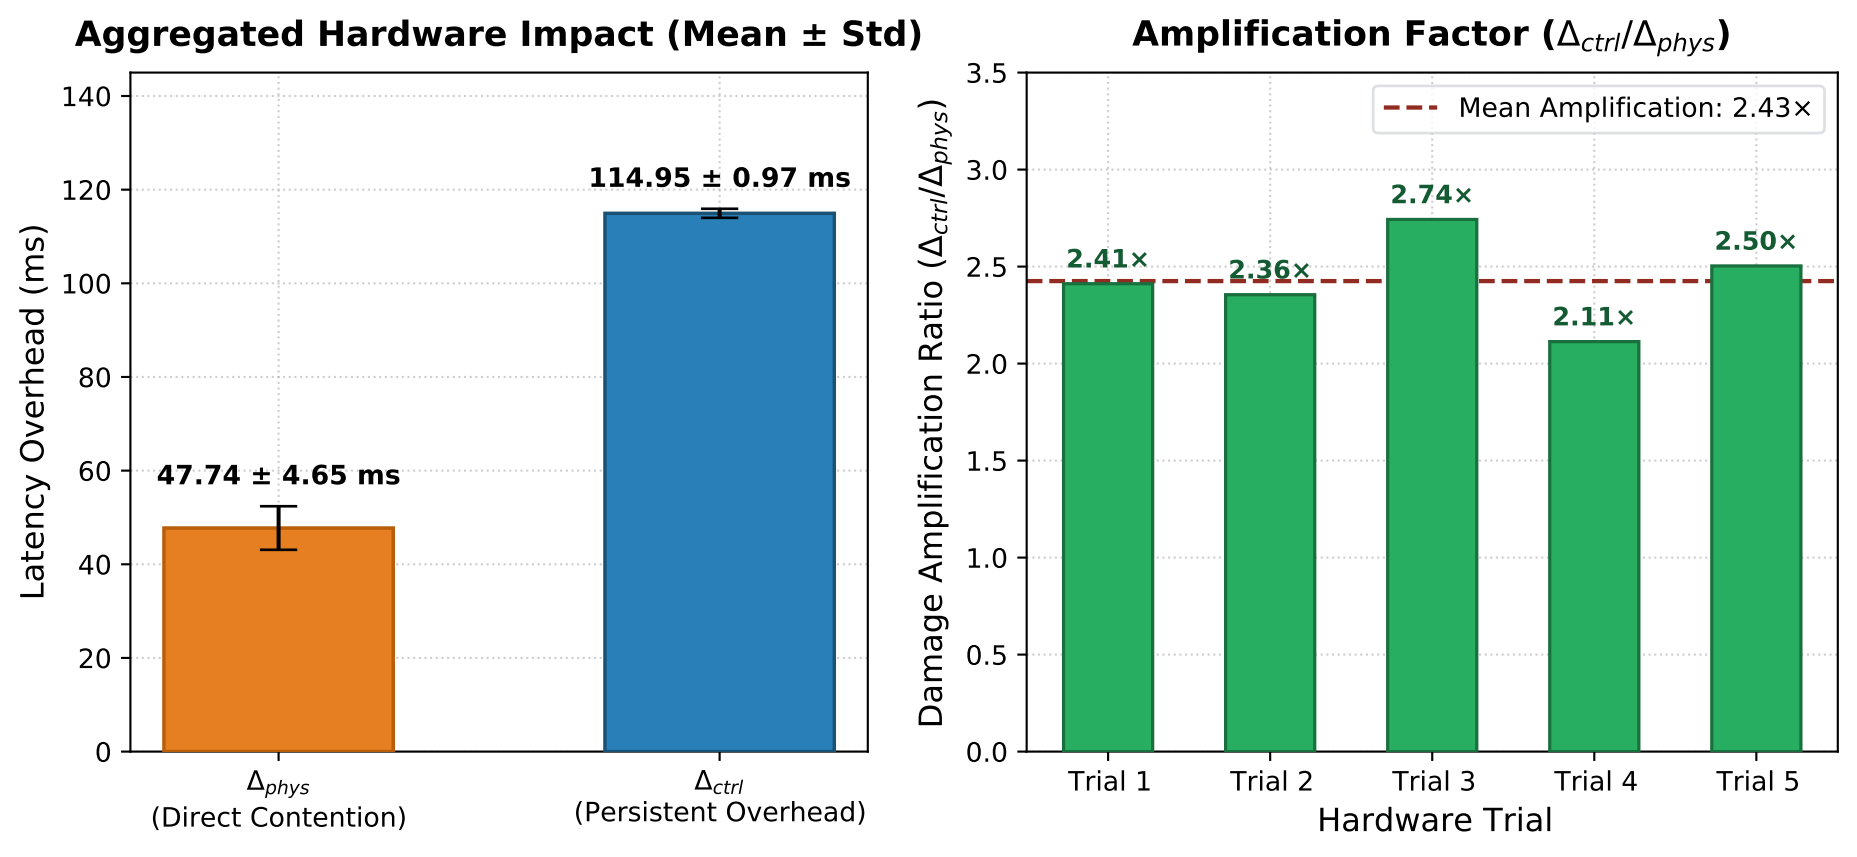
Aggregated Hardware Impact (Mean ± Std)
Latency Overhead (ms)
0
20
40
60
80
100
120
140
47.74 ± 4.65 ms
114.95 ± 0.97 ms
Δphys
(Direct Contention)
Δctrl
(Persistent Overhead)
Amplification Factor (Δctrl/Δphys)
Damage Amplification Ratio (Δctrl/Δphys)
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
Mean Amplification: 2.43×
2.41×
2.36×
2.74×
2.11×
2.50×
Trial 1
Trial 2
Trial 3
Trial 4
Trial 5
Hardware Trial