


INDEX

SHEET 1: PINOUT TO MODULE

SHEET 2: POWER, USB/JTAG

SHEET 3: SENSORS + INTERFACES

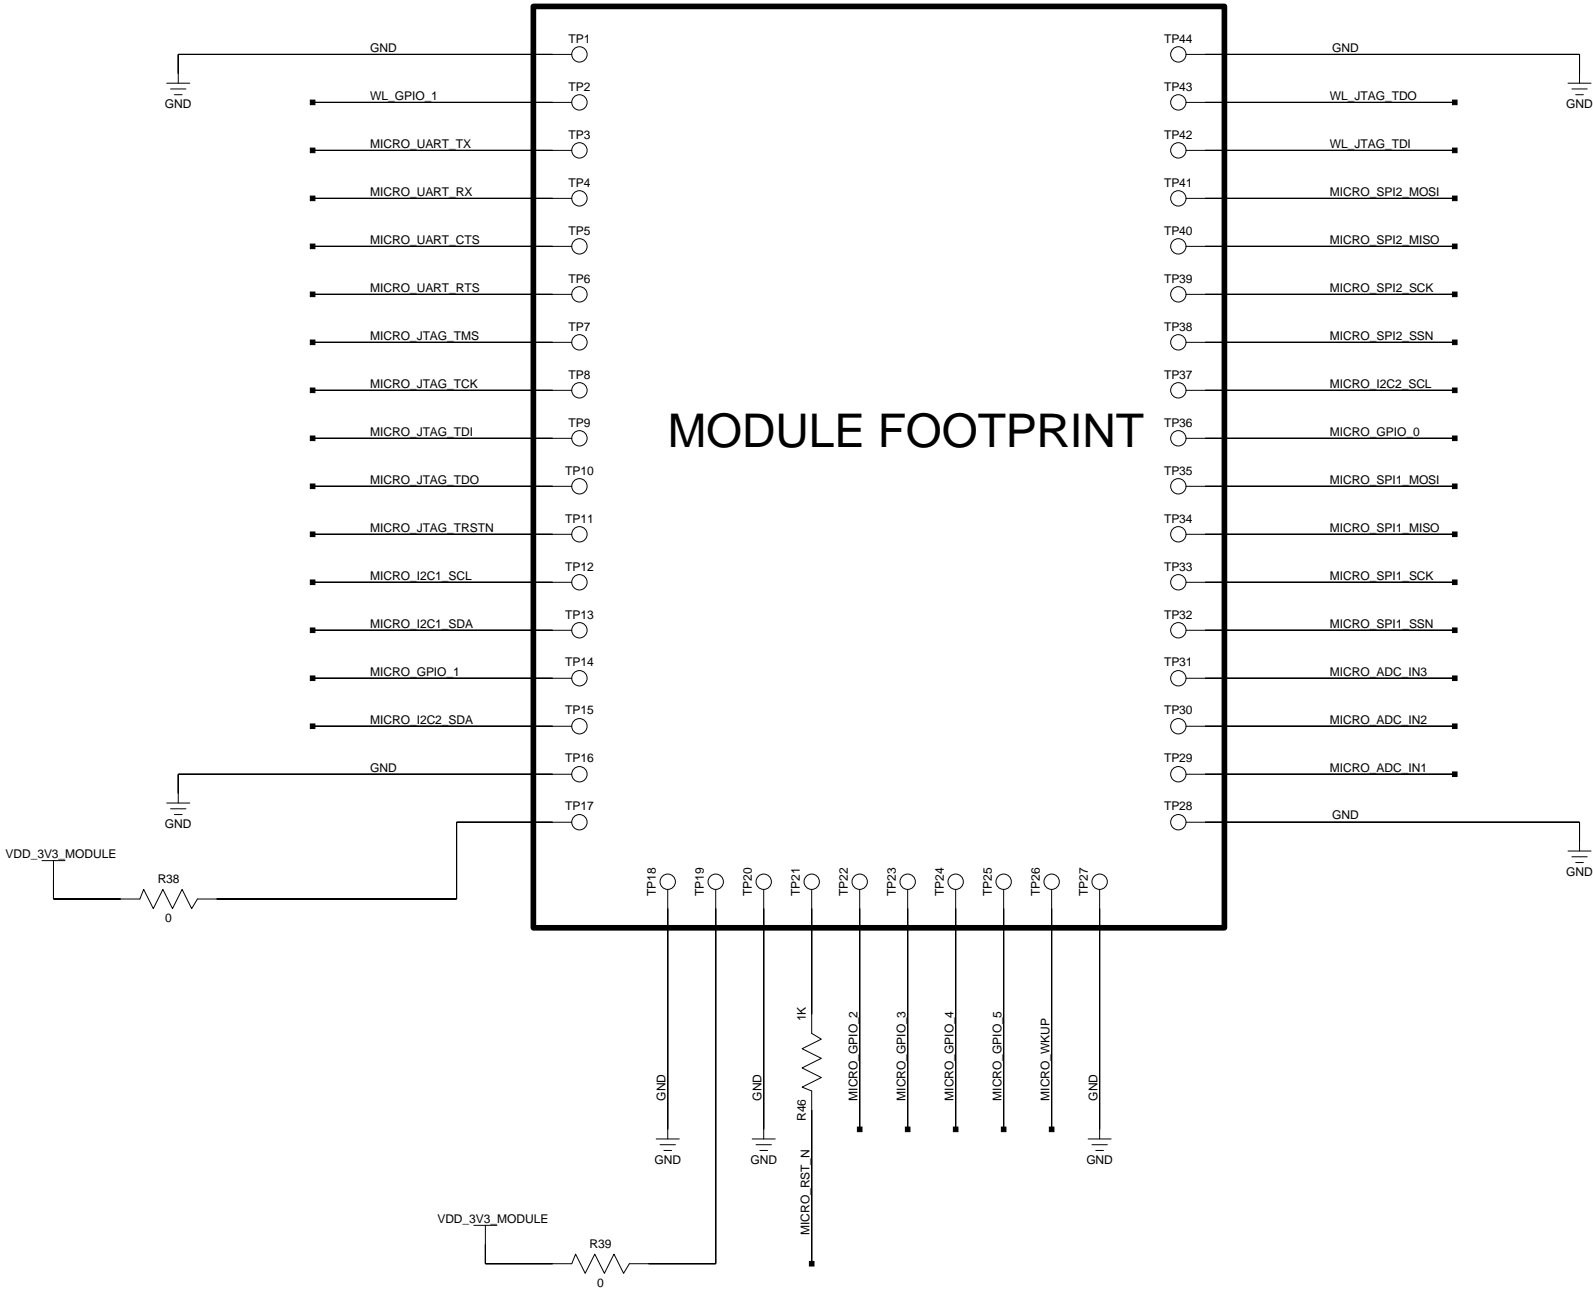


DOCUMENT
SCHEMATIC DIAGRAM 824-128990-0050

PRINTED CIRCUIT BOARD
200-128990-0050


Approvals		<div>Broadcom</div> <div>Company Confidential</div>		
Designer	Date			
Reviewer	Date	SIZE B	TITLE BCM9WCD9EVAL1_5	
Reviewer	Date	Designer ALEXIS ESPIRITU		Drawing Number 824-128990-0050
Reviewer	Date	DATE 07/07/2015:12:39		Version 01
		SHEET 1 OF 3		

Breakaway Board


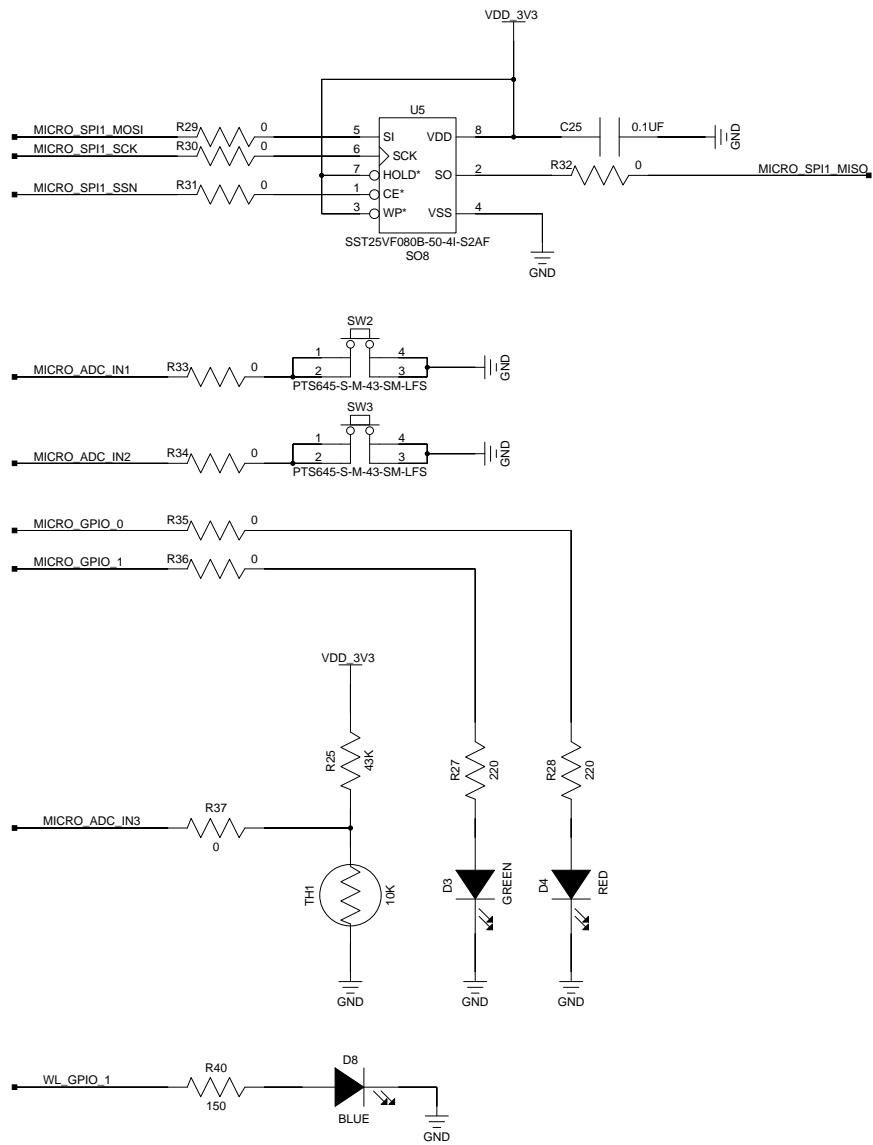


Place acrylic feet under each of the 6 mounting holes.
Make sure they do not overlap the edge of the board.

F1 NON PCB MOUNT PART RUBBER,FEET,9.5X3.8mm,ACRYLIC TRANSPARENT SJ5306	F2 NON PCB MOUNT PART RUBBER,FEET,9.5X3.8mm,ACRYLIC TRANSPARENT SJ5306
F3 NON PCB MOUNT PART RUBBER,FEET,9.5X3.8mm,ACRYLIC TRANSPARENT SJ5306	F4 NON PCB MOUNT PART RUBBER,FEET,9.5X3.8mm,ACRYLIC TRANSPARENT SJ5306
F5 NON PCB MOUNT PART RUBBER,FEET,9.5X3.8mm,ACRYLIC TRANSPARENT SJ5306	F6 NON PCB MOUNT PART RUBBER,FEET,9.5X3.8mm,ACRYLIC TRANSPARENT SJ5306

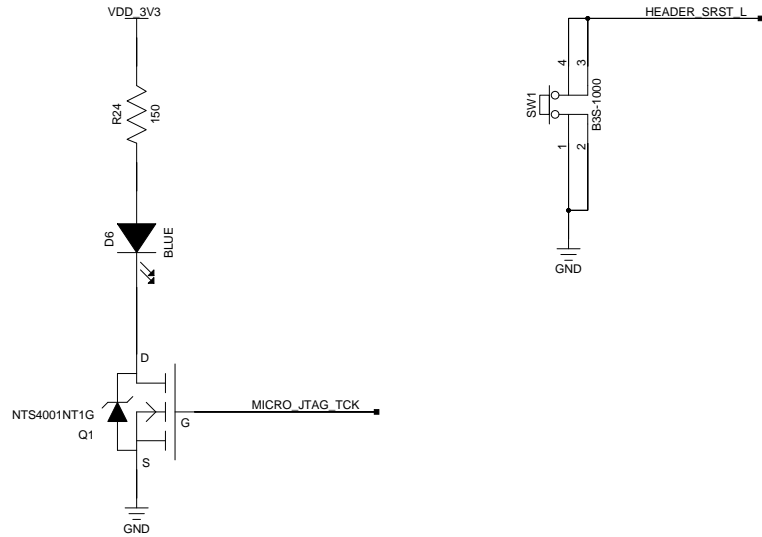


Auth Chip Header

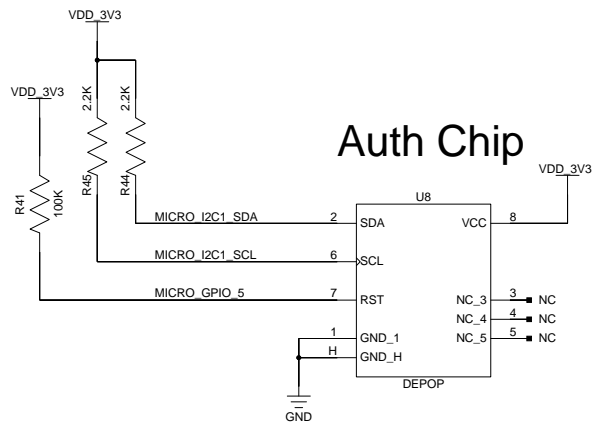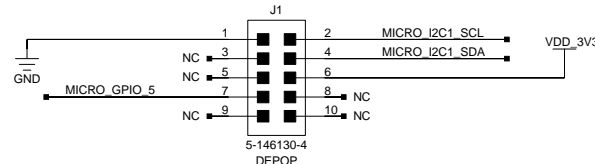


Auth Chip


Breakout Header

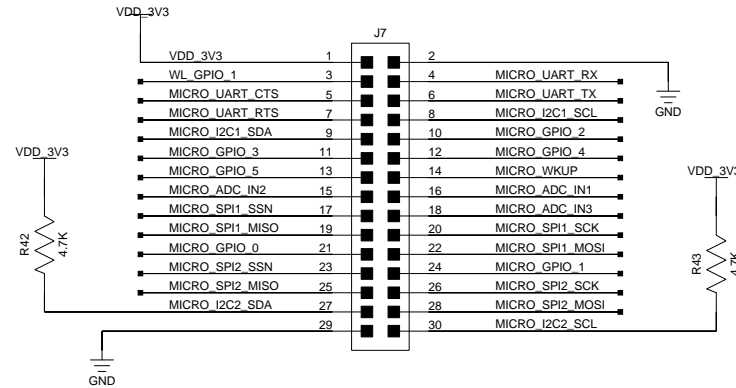

JLINK Header

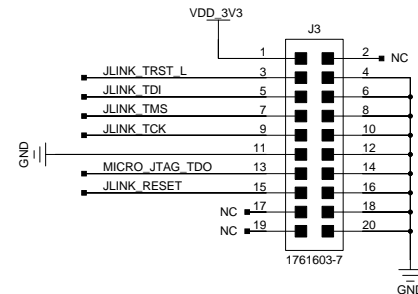

WLAN JTAG Header

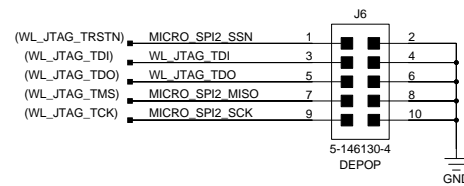

Broadcom

Company Confidential

SIZE B	TITLE BCM9WCD9EVAL1_5
DATE 07/07/2015:12:39	SHEET 3 OF 3