RAPHAEL RECESSED - 3-circuit track
230 V - 16 A per circuit - 1000 / 2000 / 3000 mm



Product type	3-circuit track (L1 / L2 / L3 + N)
Mounting	Recessed
Lengths	1000 / 2000 / 3000 mm
Profile	56 × 35.5 mm


Rated voltage per circuit	230 V
Rated current per circuit	16 A
Single-phase supply	230 V - 16 A max
Three-phase supply	230 V - 3 × 16 A max

Main materials	Copper + Aluminium
Colours	.01 White RAL 9010
	.02 Black RAL 9011
	.03 Grey RAL 7040
Net weight (1000 mm)	920 g

Max point load	60 N
Load spacing	200 mm
First load from end	100 mm
Support distance	1000 mm


Outer box / pallet	4 / 140 pcs
Warranty	5 years

Technical dimensions

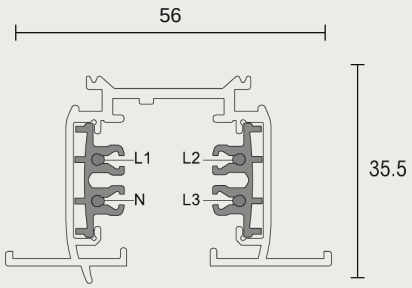

Profile section (mm) · L1 / L2 / L3 / N

Available lengths





A slim 3-circuit track that powers and carries HALO track spotlights. Three switchable circuits let one run of track control separate lighting groups, scenes or zones, on a single-phase or three-phase supply.

Colours

○ .01 White ● .02 Black ● .03 Grey


Ordering information

Length	.01 White	.02 Black	.03 Grey
1000 mm	RPH-RC-1000.01	RPH-RC-1000.02	RPH-RC-1000.03
2000 mm	RPH-RC-2000.01	RPH-RC-2000.02	RPH-RC-2000.03
3000 mm	RPH-RC-3000.01	RPH-RC-3000.02	RPH-RC-3000.03


Product features

Extruded aluminium profile with copper conductors for three live circuits (L1, L2, L3) and neutral. Recessed into the ceiling, flush with the finished surface. Each circuit is rated 230 V / 16 A. Can be fed from a single-phase supply (230 V, 16 A max) or a three-phase supply (230 V, 3 × 16 A max). Supplied in 1000, 2000 and 3000 mm lengths, in white, black or grey finish.


Mechanical load diagram

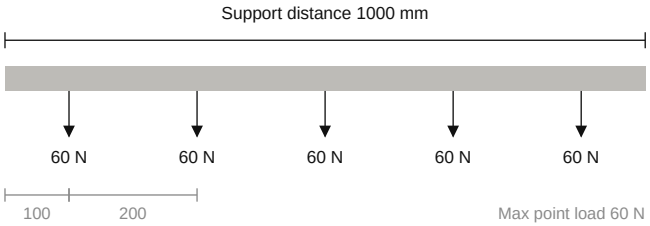

Connecting diagram

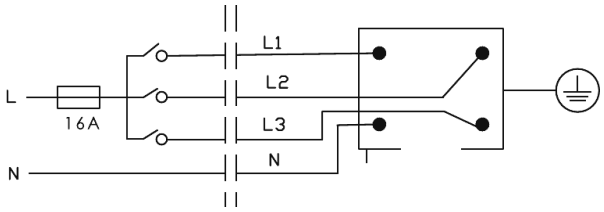

Single-phase 230 V 16 A max

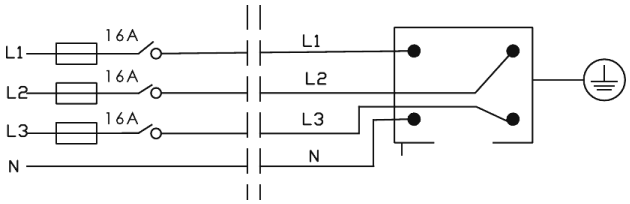

Three-phase 230 V 3 × 16 A max