


Be sure to hand Installation Manual over to the customer.

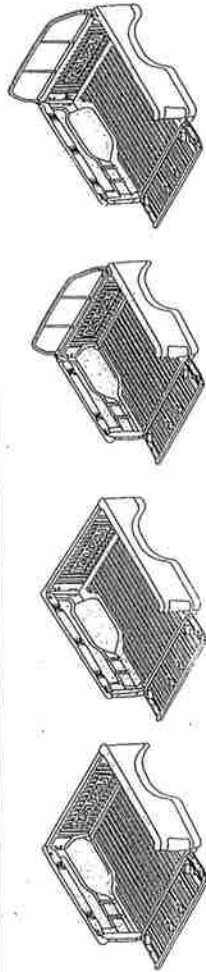

INSTALLATION MANUAL

Applicable vehicle TFSR CREW CAB 2015~ TFSR EXTENDED CAB WITH GUARD FRAME 2015~
TFSR EXTEND CAB 2015~ TFSR CREW CAB WITH GUARD FRAME 2015~

Product No. 5-8676-1346-* / 5-8676-1351-* / 5-8676-1630-*
5-8676-1348-* / 5-8676-1353-* / 5-8676-1904-*
5-8676-1350-* / 5-8676-1356-* / 5-8676-1906-*


Tools (Not supplied in kit please prepare before installation)



Components (Please ensure installation kit is complete)

| No. | Part name | Q'ty | TFSR CREW CAB 2015~ | TFSR EXTEND CAB 2015~ | TFSR CREW CAB WITH GUARD FRAME 2015~ | TFSR EXTENDED CAB WITH GUARD FRAME 2015~ | Part name | Q'ty | TFSR CREW CAB 2015~ | TFSR EXTEND CAB 2015~ | TFSR CREW CAB WITH GUARD FRAME 2015~ | TFSR EXTENDED CAB WITH GUARD FRAME 2015~ |
|-----|-------------------------------|------|---------------------|-----------------------|--------------------------------------|--|------------------------|------|---------------------|-----------------------|--------------------------------------|--|
| ① | TFSR CREW CAB | 1 | ✓ | | | | Bracket CREW RH/LH | 2 | ✓ | | | |
| | TFSR EXTEND CAB | 1 | | | | | Bracket EXTEND RH/LH | 2 | | ✓ | | |
| | TFSR CREW CAB W/GUARD FRAME | 1 | | ✓ | | | Bolt M8x25 | 8 | ✓ | ✓ | ✓ | ✓ |
| | TFSR CREW CAB W/SPORT BAR | 1 | ✓ | | | | Collar M8 | 8 | ✓ | ✓ | ✓ | ✓ |
| | TFSR EXTEND CAB W/GUARD FRAME | 1 | | | ✓ | | Plain washer M8, OD 32 | 8 | ✓ | ✓ | ✓ | ✓ |
| ② | Super lock S-14 | 4 | ✓ | | | | Tail gate | 1 | ✓ | ✓ | ✓ | ✓ |
| | Super lock S-14 | 6 | | | | | U-Clip lock | 1 | ✓ | ✓ | ✓ | ✓ |
| | | | | | | | Screw | 4 | ✓ | ✓ | ✓ | ✓ |
| | | | | | | | Plain washer M8, OD 18 | 4 | ✓ | ✓ | ✓ | ✓ |
| | | | | | | | Plastic cap | 4 | ✓ | ✓ | ✓ | ✓ |
| | Installation manual | 1 | | ✓ | | | | | ✓ | ✓ | ✓ | ✓ |

Disclaimer: Our products are sold as decorative accessories and should not be relied upon as protection for the vehicle or occupants in the event of collision or rollover. The manufacturer/supplier assume no liability for injury, loss, incidental or consequential damages in the event of collision or rollover.

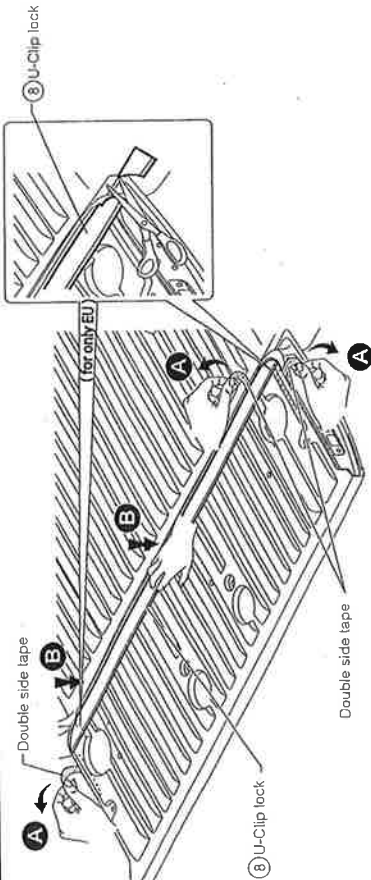

CAUTIONS

- When use the composite hook to fix the cargo, please note that maximum load of the hook must be 30 Kgf, or less.



MAINTENANCE:

- Use soft cleaning cloth or sponge with mild detergent and water solution to clean stains on the product.
- Avoid the use of any chemicals or any abrasive-type cleansers/materials to clean the D-BOX as that can cause scratches, discoloration, and damage to the product, and will void the warranty.
- Do not allow automotive lubricants, lacquer thinner or any solvent-based products to come into contact with the product.
- If fuel splashes onto the product, immediately wash it off with car washing detergent and water.
- If cars are used in the area where snow melting agent is frequently used or sea breeze blow, wash cars often and pay attention not to remain snow melting agent or salt.

WARRANTY:

- Following conditions are excluded from the product warranty.
- Damage due to failure to comply with installation manual.
- Damage due to modifications to the mounting hardware and components.
- Damage due to improper use and negligence.
- Uncontrollable causes e.g. weather conditions, disaster, animal droppings.
- Normal wear and tear.
- The manufacturer/supplier cannot be held responsible for any damages or accidents resulting from improper installation/use of the product.

CAUTION UPON INSTALLATION

- Do not install or use this product in any other ways except usage in ISUZU vehicle mentioned in Applicable Vehicle above.
- Please read these thoroughly installation instructions before attempting to fit the product.
- This product must be installed exactly as specified in this manual. Failure to do so may result in improper fit which can cause structural damage to the product and vehicle, as well as, serious accident due to partial/complete loss of the product, and will void the warranty.
- Be sure that engine of the vehicle is off, handbrake is pulled, and that the vehicle is set on a level surface before commencing the installation.
- Do not use excessive force while handling and installing the product. Be sure to protect truck bed and body of the vehicle against scratches which can occur during installation process.
- Repositioning of double-side tape can deteriorate their adhesive property. It is strongly advised that necessary measurements are made accurately prior to application of the tape.
- Be sure to clean the installation surface according to cleaning instruction before commencing installation.
- For installation under a temperature 15 degree Celsius or lower, please warm double-side tape and sponge tape with a dryer to ensure proper adhesion.
- Make sure to allow a minimum of 24 hours after installation before operating vehicle, or allowing contact with water.
- All installation hardware, tape and fasteners must be checked every so often for tightness.
- To stick double-side tape tightly, press it firmly.
- Preserve [INSTALLATION MANUAL] at a safe place ready for your reference at needs, after reading.

Installation

