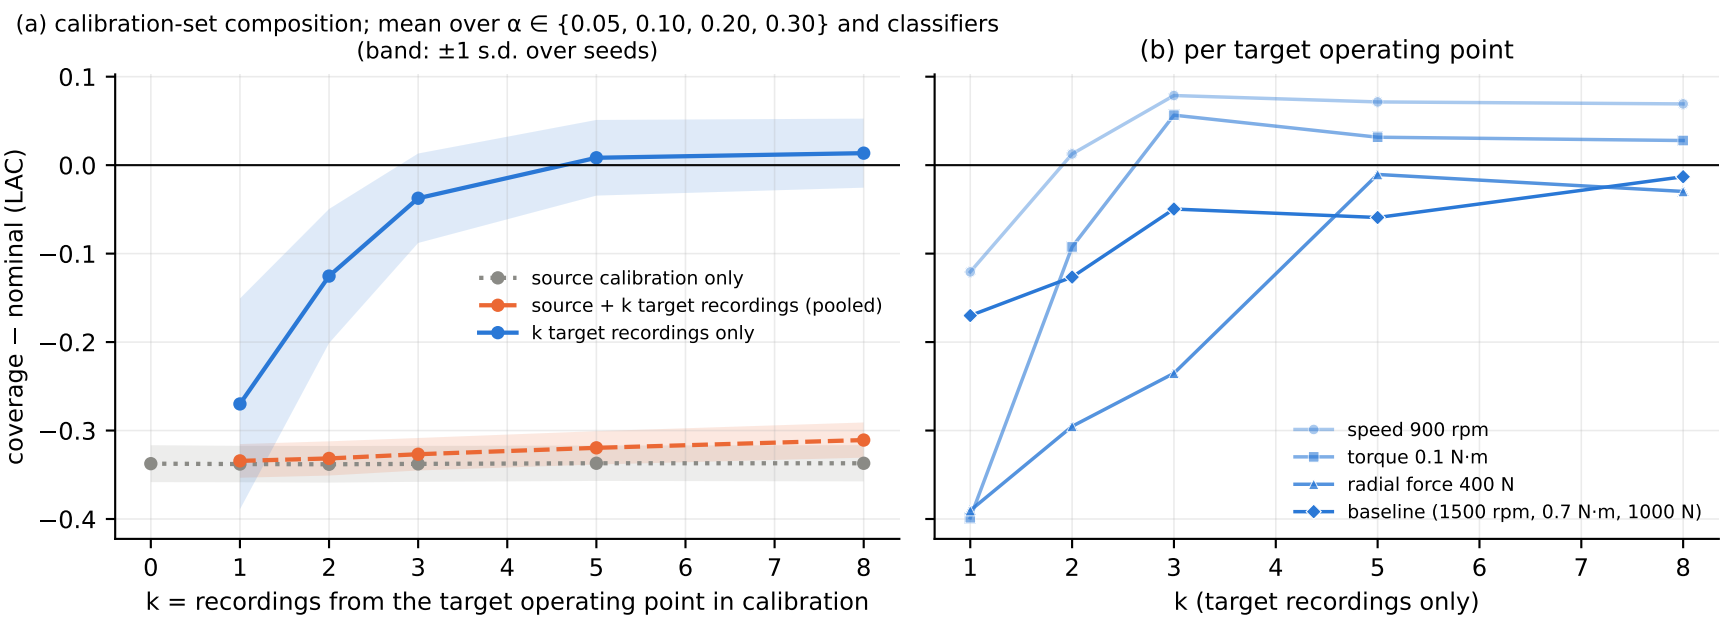
(a) calibration-set composition; mean over α ∈ {0.05, 0.10, 0.20, 0.30} and classifiers
(band: ±1 s.d. over seeds)
coverage − nominal (LAC)
0.1
0.0
−0.1
−0.2
−0.3
−0.4
source calibration only
source + k target recordings (pooled)
k target recordings only
0
1
2
3
4
5
6
7
8
k = recordings from the target operating point in calibration
(b) per target operating point
speed 900 rpm
torque 0.1 N·m
radial force 400 N
baseline (1500 rpm, 0.7 N·m, 1000 N)
1
2
3
4
5
6
7
8
k (target recordings only)