



A signalled

the encoder measures the allocation, minimises it exactly, and sends the answer

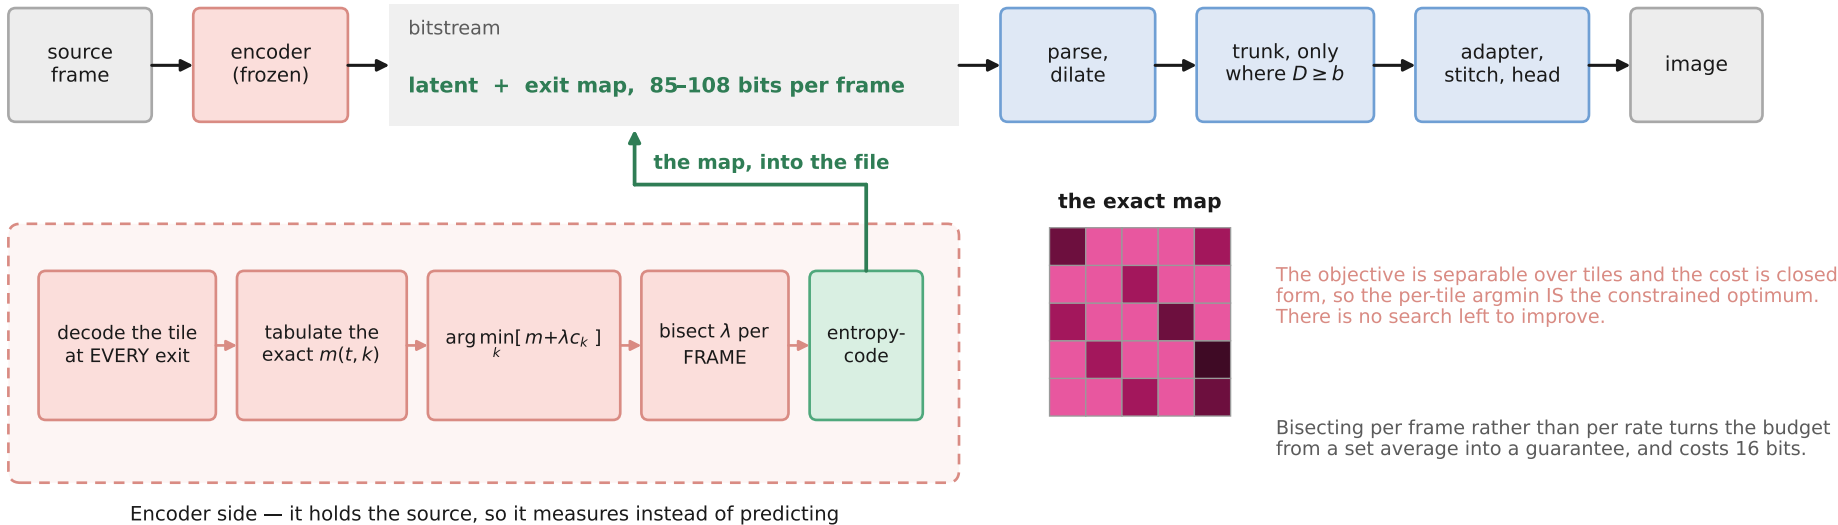

the exact map



The objective is separable over tiles and the cost is closed form, so the per-tile argmin IS the constrained optimum. There is no search left to improve.

Bisecting per frame rather than per rate turns the budget from a set average into a guarantee, and costs 16 bits.

mean MAC saving, 0.1 dB

28.32%

frames inside the budget

264 / 265

added to the bitstream

108 bits, about 2×10^{-4} of the frame