



a The source is available at the encoder, but the error table must be computed

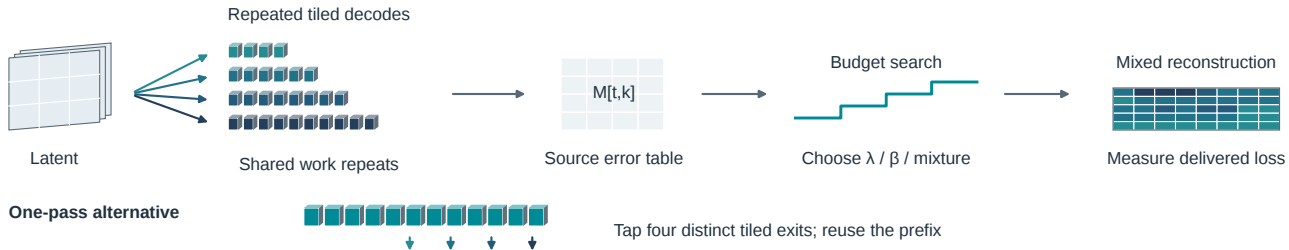

b Recorded table construction time

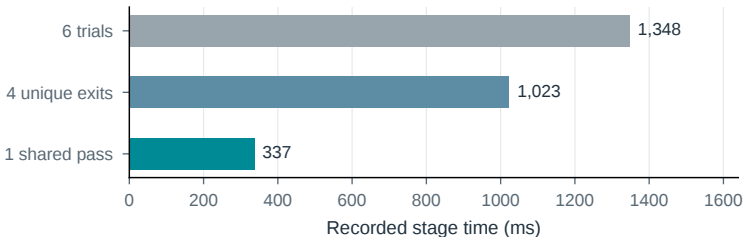

Historical timing: 8 frames $\times$ 3 repetitions at QP32. No new end-to-end latency measurement.

c Calibration changes the cost

Fixed validation-selected β

Router uses decoded features.
No per-frame source table is required.

Per-frame source-calibrated β

The plotted budget sweep uses $M[t,k]$.
A fast router does not remove that cost.