

HANOI UNIVERSITY OF SCIENCE AND TECHNOLOGY  
SCHOOL OF ELECTRICAL AND ELECTRONIC ENGINEERING



# Final Project Report

## Topic 8 Simulation of the OFDM system using channel coding, LMSE and 64 QAM modulation.

Full Names	Class	Student ID
Ngô Văn Cảnh	CTTT Dien Tu 01 K64	20193204
Nguyễn Ngọc Dũng	CTTT Dien Tu 01 K64	2019xxxx
Bạch Vũ Thái Dương	CTTT Dien Tu 01 K64	2020xxxx
Hoàng Thế Nguyên	CTTT Dien Tu 01 K64	2018xxxx

Supervisor: Dr. Nguyen Van Duc  
Dr. Nguyen Thu Nga

Hanoi, 26/12/2023

# TABLE OF CONTENTS

<b>LIST OF ABBREVIATIONS</b>	<b>i</b>
<b>LIST OF FIGURES</b>	<b>ii</b>
<b>LIST OF TABLES</b>	<b>iii</b>
<b>WORK CONTRIBUTION</b>	<b>iv</b>
<b>CHAPTER 1. INTRODUCTION</b>	<b>1</b>
<b>CHAPTER 2: BACKGROUND</b>	<b>2</b>
2.1 OFDM Basics . . . . .	2
2.2 OFDM Parameters and Characteristics . . . . .	3
2.2.1 Complexity . . . . .	3
2.2.2 Orthogonality . . . . .	3
2.2.3 Advantages and Disadvantages . . . . .	4
<b>CHAPTER 3: DESIGN AND IMPLEMENTATION</b>	<b>5</b>
3.1 OFDM Modulation method and transceiver architechure . . . . .	5
<b>CHAPTER 4: SIMULATION AND RESULTS</b>	<b>8</b>
4.1 Parameters set up . . . . .	8
<b>CHAPTER 5: CONCLUSION</b>	<b>10</b>
<b>REFERENCES</b>	<b>11</b>
<b>APPENDIX</b>	<b>12</b>

## **LIST OF ABBREVIATIONS**

OFDM	Orthogonal Frequency Division Multiplexing
QAM	Quadrature Amplitude Modulation
LMSE	Least Mean Square Equalizer
FFT	Fast Fourier Transform
IFFT	Inverse Fast Fourier Transform
BER	Bit Error Rate
SER	Symbol Error Rate
PSK	Phase Shift Keying
FDM	Frequency Division Multiplexing
CP	Cyclic Prefix
SNR	Signal to Noise Ratio

## LIST OF FIGURES

Figure 2.1	<b>Cyclic-extension-tolerance</b> . . . . .	2
Figure 2.2	<b>Effectiveness-of-cyclic-extension</b> . . . . .	3
Figure 3.1	<b>Spectrum of a single subcarrier (left) and 5 subcarriers (right)</b>	5
Figure 3.2	<b>Block diagram of the OFDM system</b> . . . . .	6
Figure 4.1	The Carriers transmit pilots and which carriers contain payload .	8
Figure 4.2	<b>64-QAM Constellation with gray-mapping</b> . . . . .	9

## LIST OF TABLES

## WORK CONTRIBUTION

No.	Job	Name
1	Do work 1	A and B
2	Do work 2	C and D
3	Do work 3	A
4	Do work 4	B
5	Do work 5	C
6	Do work 6	D
7	Do work 7	A and C
8	Do work 8	B and D
9	Do work 9	D
10	Do work 10	A

# CHAPTER 1. INTRODUCTION

In a single carrier communication system, the symbol period must be much greater than the delay time in order to avoid inter-symbol interference (ISI) [1]. Since data rate is inversely proportional to symbol period, having long symbol periods means low data rate and communication inefficiency. A multicarrier system, such as FDM (aka: Frequency Division Multiplexing), divides the total available bandwidth in the spectrum into sub-bands for multiple carriers to transmit in parallel [2]. An overall high data rate can be achieved by placing carriers closely in the spectrum. However, inter-carrier interference (ICI) will occur due to lack of spacing to separate the carriers. To avoid inter-carrier interference, guard bands will need to be placed in between any adjacent carriers, which results in lowered data rate.

OFDM (aka: Orthogonal Frequency Division Multiplexing) is a multicarrier digital communication scheme to solve both issues. It combines a large number of low data rate carriers to construct a composite high data rate communication system. Orthogonality gives the carriers a valid reason to be closely spaced, even overlapped, without inter-carrier interference. Low data rate of each carrier implies long symbol periods, which greatly diminishes inter-symbol interference [3].


Although the idea of OFDM started back in 1966 [4], it has never been widely utilized until the last decade when it “becomes the modem of choice in wireless applications” [5]. It is now interested enough to experiment some insides of OFDM.

The objective of this project is to demonstrate the concept and feasibility of an OFDM system, and investigate how its performance is changed by varying some of its major parameters. This objective is met by developing a MATLAB program to simulate a basic OFDM system. From the process of this development, the mechanism of an OFDM system can be studied; and with a completed MATLAB program, the characteristics of an OFDM system can be explored.

## CHAPTER 2: BACKGROUND

### 2.1 OFDM Basics

In digital communications, information is expressed in the form of bits. The term symbol refers to a collection, in various sizes, of bits. OFDM data are generated by taking symbols in the spectral space using M-PSK, QAM, etc, and convert the spectra to time domain by taking the Inverse Discrete Fourier Transform (IDFT). Since Inverse Fast Fourier Transform (IFFT) is more cost effective to implement, it is usually used instead [3]. Once the OFDM data are modulated to time signal, all carriers transmit in parallel to fully occupy the available frequency bandwidth. During modulation, OFDM symbols are typically divided into frames, so that the data will be modulated frame by frame in order for the received signal be in sync with the receiver. Long symbol periods diminish the probability of having inter-symbol interference, but could not eliminate it. To make ISI nearly eliminated, a cyclic extension (or cyclic prefix) is added to each symbol period. An exact copy of a fraction of the cycle, typically 25% of the cycle, taken from the end is added to the front. This allows the demodulator to capture the symbol period with an uncertainty of up to the length of a cyclic extension and still obtain the correct information for the entire symbol period.

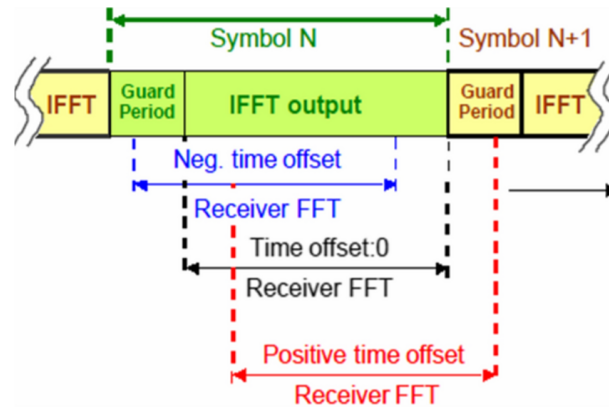

**Figure 2.1** Cyclic-extension-tolerance

As shown in Figure 2.1, a guard period, another name for the cyclic extension, is the amount of uncertainty allowed for the receiver to capture the starting point of a symbol period, such that the result of FFT still has the correct information. In Figure 2, a comparison between a precisely detected symbol period and a delayed detection illustrates the effectiveness of the cyclic extension.



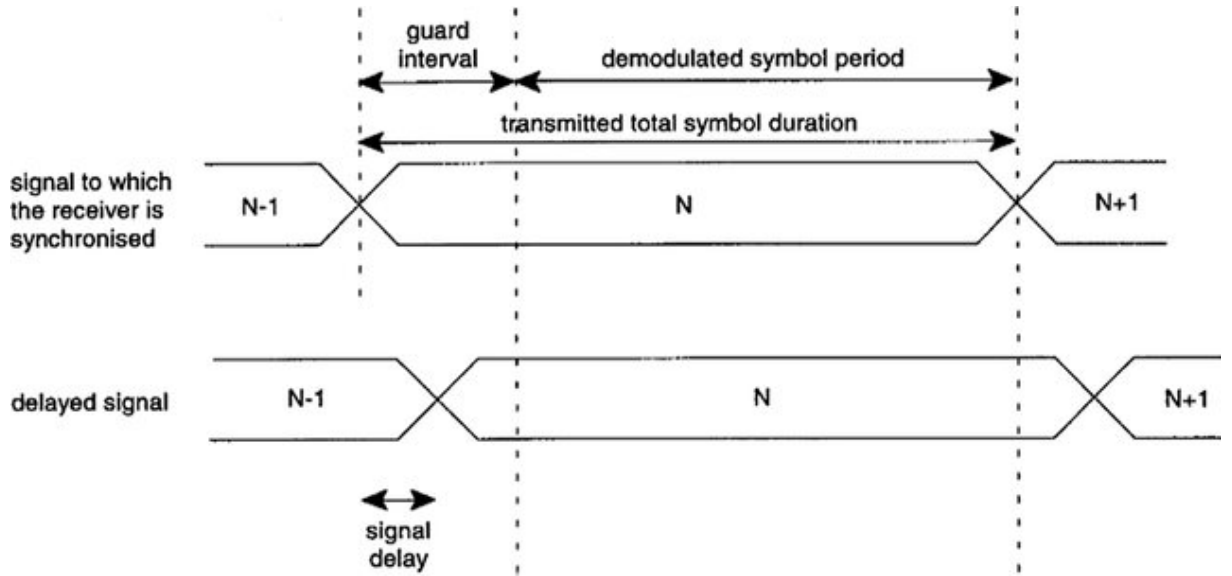


Figure 2.2 Effectiveness-of-cyclic-extension

## 2.2 OFDM Parameters and Characteristics

### 2.2.1 Complexity

The number of carriers in an OFDM system is not only limited by the available spectral bandwidth, but also by the IFFT size, which is determined by the complexity of the system. The more complex (also more costly) the OFDM system is, the higher IFFT size it has; thus a higher number of carriers can be used, and higher data transmission rate achieved. The choice of M-PSK modulation varies the data rate and Bit Error Rate (BER). The higher order of PSK leads to larger symbol size, thus less number of symbols needed to be transmitted, and higher data rate is achieved. But this results in a higher BER since the range of 0-360 degrees of phases will be divided into more sub-regions, and the smaller size of sub-regions is required, thereby received phases have higher chances to be decoded incorrectly. OFDM signals have high peak-to-average ratio, therefore it has a relatively high tolerance of peak power clipping due to transmission limitations.

### 2.2.2 Orthogonality

The key to OFDM is maintaining orthogonality of the carriers. If the integral of the product of two signals is zero over a time period, then these two signals are said to be orthogonal to each other. Two sinusoids with frequencies that are integer multiples of a common frequency can satisfy this criterion. Therefore, orthogonality is defined by :

$$\int_0^T \cos(2\pi n f_o t) \cos(2\pi m f_o t) dt = 0 \quad (n \neq m) \quad (2.1)$$

Where  $n$  and  $m$  are two unequal integers;  $f_o$  is the fundamental frequency;  $T$  is the period over which the integration is taken. For OFDM,  $T$  is one symbol period and  $f_o$  set to  $\frac{1}{T}$  for optimal effectiveness.

### 2.2.3 *Advantages and Disadvantages*

Upgrading and optimizing algorithms, OFDM systems provide highly advantageous features for wireless transmission and transceiver system design:

- **Complete Elimination of ISI (InterSymbol Interference):** OFDM systems can entirely eliminate ISI by employing an appropriate Guard Interval, thus mitigating multipath distortion.
- **Suitable for High-Speed Transmission Systems:** OFDM is well-suited for high-speed transmission systems due to the significant reduction in Frequency Selectivity compared to single-carrier transmission. This reduction minimizes the impact of frequency-selective fading.
- **Simple Receiver Structure:** OFDM systems boast a simple receiver structure, contributing to ease of implementation.

However, OFDM technology also has its drawbacks that need careful consideration and practical research for designing a system suitable for specific purposes:


- **Uneven Amplitude Envelope:** The amplitude envelope of the signal is uneven, causing nonlinear distortion in power amplifiers at the transmitter and receiver.
- **Guard Interval Impact on Transmission Efficiency:** While the guard interval is used to eliminate ISI, it also reduces transmission efficiency due to wasting power on transmitting useless signals.
- **Orthogonality Conditions between Subcarriers:** The requirement for orthogonality between subcarriers makes the system susceptible to the effects of Doppler, frequency offset, and time offset due to synchronization errors.

These challenges require careful consideration and research to optimize the performance of the OFDM system under real-world conditions and ensure that the drawbacks do not significantly affect transmission quality

## CHAPTER 3: DESIGN AND IMPLEMENTATION

### 3.1 OFDM Modulation method and transceiver architecture

Orthogonal Frequency Division Multiplexing (OFDM) modulation is based on the Frequency Division Multiplexing (FDM) technique, with the key distinction that the subcarrier waves are placed orthogonally to each other. With this orthogonality, their signal spectra overlap without affecting the demodulation process at the receiver. The signal spectrum of a system of subcarrier waves is illustrated in Figure 3.1 [6].

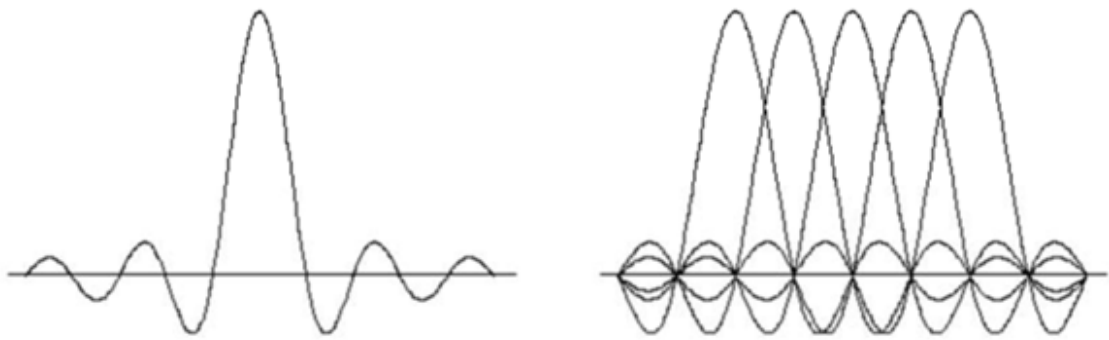


**Figure 3.1 Spectrum of a single subcarrier (left) and 5 subcarriers (right)**

As shown in Figure 3.1, the signal spectrum of each subcarrier channel has the form of  $\frac{\sin(x)}{x}$ . The subcarriers are distributed evenly across the frequency range, ensuring that the peak points of one channel coincide with the null points of adjacent subcarrier channels. In the OFDM system, the signals, after passing through the digital modulator, undergo an Inverse Fast Fourier Transform (IFFT) to form OFDM symbols. The use of IFFT allows the OFDM modulator to simultaneously modulate multiple channels, a task that is challenging with FDM modulators.

Principles of operation for each block:

- **S/P (Serial to Parallel):** Converts serial data into parallel data, splitting high-speed bit streams into  $K$  lower-speed bit streams, where  $K$  is the number of subcarrier waves in the system.
- **M-QAM Modulation:** Utilizes QAM modulation to map pairs of bits into complex signals in the QAM signal constellation. The modulation level  $M$  is chosen based on different transmission systems.
- **Zero Insertion:** Inserts virtual subcarriers to ensure the DC component's average value is zero and creates a frequency guard band between information systems to

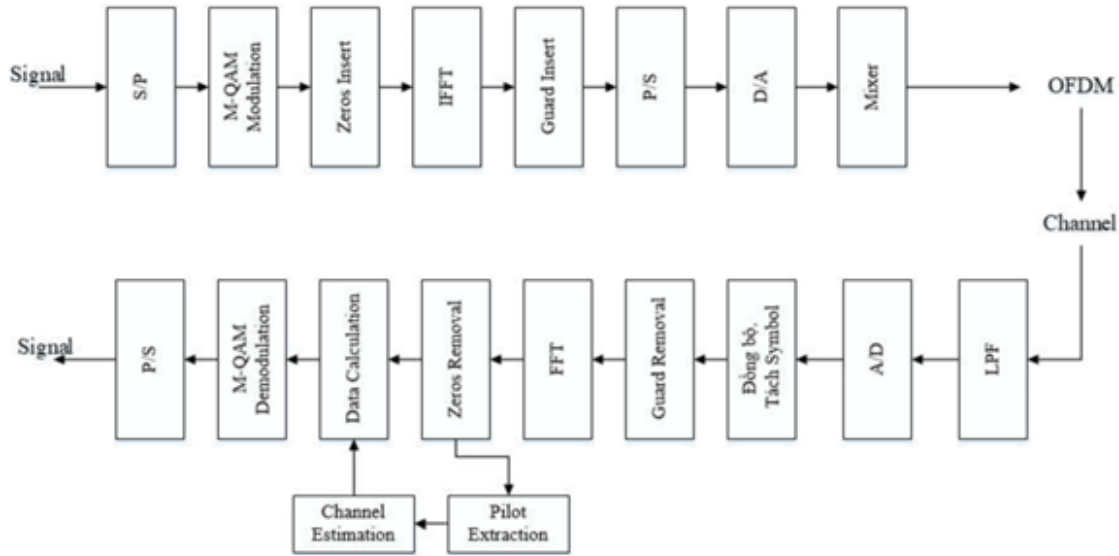

**Figure 3.2 Block diagram of the OFDM system**

avoid Intercarrier Interference (ICI).

- IFFT (Inverse Fast Fourier Transform): Performs a fast implementation of the Inverse Discrete Fourier Transform, transforming signals from the time domain to the frequency domain, creating orthogonal subcarrier waves.

$$x_n = \frac{1}{N} \sum_{k=0}^{N-1} X_k \cdot e^{j2\pi kn/N} \quad (3.2)$$

- Guard Insertion: Inserts a guard interval to counteract Inter-Symbol Interference (ISI). ISI arises from the influence of multipath effects when symbols arriving later interfere with symbols arriving earlier. The guard interval length depends on the transmission channel and follows the principle of copying a portion of the signal sequence that needs to be transmitted and appending it to the beginning of the signal.
- P/S (Parallel to Serial): Converts parallel data back to serial, returning the signal stream to its original continuous form for transmission.
- Mixer: Combines the signal with carrier waves before sending it to the antenna. OFDM modulation uses two different Mixers for two streams of real and complex signals from the P/S block. These two signal streams are multiplied successively with carrier waves and then added at the Mixer's output.
- LPF (Low Pass Filter): Low-pass filter that brings the signal back to baseband.

- D/A, A/D: Converts signals from digital to analog and analog to digital for long-distance transmission. The signal after D/A conversion is an analog baseband signal with a bandwidth depending on the sampling frequency in the D/A converter. At the receiver, an A/D converter is used to obtain digital signals for decoding.
- Pilot Extraction, Channel Estimation: Based on pilot signals, the receiver estimates the transmission channel using estimation algorithms.
- 64-QAM Modulation/Demodulation: Maps binary sequences to complex signals characteristic of points in the QAM signal constellation. As illustrated in Figure 4.2, each bit sequence corresponds to one point on the complex plane. Quadrature Amplitude Modulation (QAM) is a modulation technique that combines amplitude modulation and phase modulation. Compared to other modulation types, QAM signals can resist noise effectively because the receiver can differentiate based on both amplitude and phase. The symbol constellation of QAM signals has larger amplitude and phase differences than other modulation types with the same number of levels  $M$ , making it less susceptible to interference when symbols overlap.


## CHAPTER 4: SIMULATION AND RESULTS

In this project, we're using a python script to simulate the 64 QAM OFDM system. A 3 channels bitmap image is used as source input. Another bitmap image file will be generated at the end of the simulation as the output.

### 4.1 Parameters set up


1.  $K = 64$  : The number of subcarriers, describes how many subcarriers are available in the OFDM system.
2.  $CP = K//4$  : The length of the cyclic prefix (CP) denotes the number of samples that are copied from the end of the modulated block to the beginning, to yield a cyclic extension of the block.
3.  $P = 8$  : The number of pilots in the OFDM symbol, describes how many carriers are used to transmit known information (i.e. pilots). Pilots will be used at the receiver to estimate the wireless channel between transmitter and receiver.
4.  $pilotValue = 3 + 3j$  : The known value each pilot transmits

After that, we need to define some index sets that describe which carriers transmit pilots and which carriers contain payload.

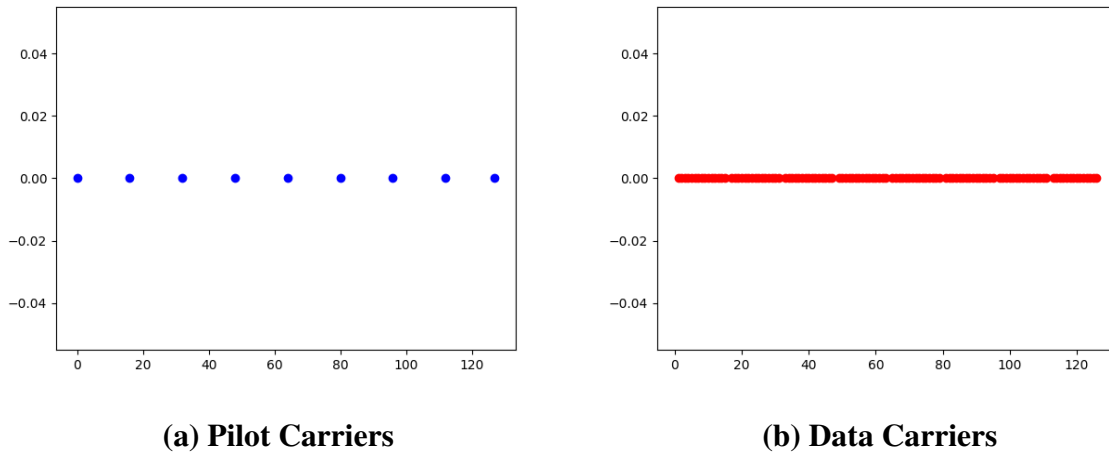

**Figure 4.1 The Carriers transmit pilots and which carriers contain payload**

Let's define the modulation index  $\mu$  and the corresponding mapping table. We consider 64QAM transmission, i.e. we have  $\mu = 6$  bits per symbol. Furthermore, the mapping from groups of 6 bits to a 64QAM constellation symbol shall be defined in mapping table.

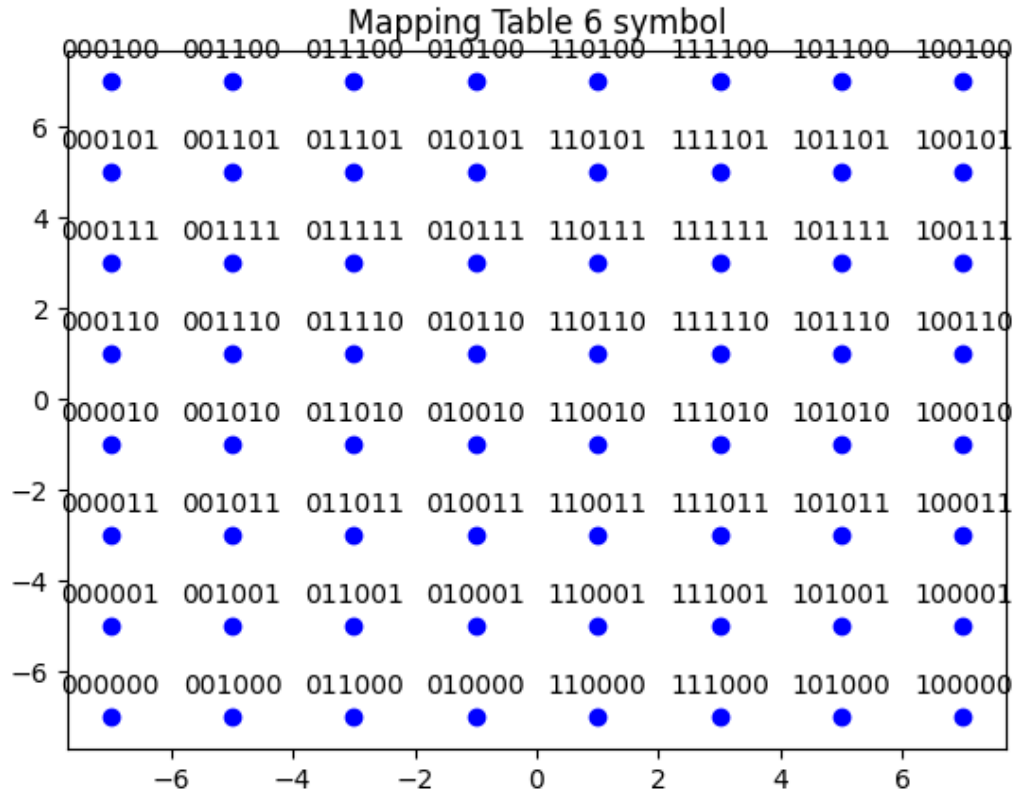

**Figure 4.2 64-QAM Constellation with gray-mapping**

In Figure 4.2, we have plotted the 64-QAM constellation, along with the bit-labels. In Gray-mapping, two adjacent constellation symbols differ only by one bit and the other 5 bits remain the same. This technique helps to minimize bit-errors, in case a wrong constellation symbol is detected: Most probably, symbol errors are "off-by-one" errors, i.e. a symbol next to the correct symbol is detected. Then, only a single bit-error occurs.

## **CHAPTER 5: CONCLUSION**



## REFERENCES

- [1] Schulze, Henrik and Christian Luders. Theory and Applications of OFDM and CDMA John Wiley & Sons, Ltd. 2005
- [2] Theory of Frequency Division Multiplexing
- [3] Acosta, Guillermo. "OFDM Simulation Using MATLAB" 2000
- [4] A Brief History of OFDM.
- [5] Lui, Hui and Li, Guoqing. OFDM-Based Broadband Wireless Networks Design and Optimization Wiley-Interscience 2005
- [6] Nguyen Van Duc. "Digital Communication Technique" 2004

# **APPENDIX**

## **Appendix 1**