



Gyproc Plasterboard

FireStop Board



Gyproc

SAINT-GOBAIN

World's No.1 in Gypsum Walls and Ceilings

Gyproc FireStop Board

Gyproc FireStop Board comprises of gypsum compound mixed with fiberglass and micro silica in the core, bounded in pink faced paper.

It is universally used in Gyproc wall partitioning systems, wall linings and ceiling systems to give increased fire protection. Made from natural gypsum, Gyproc FireStop Board is manufactured with leading edge technology to meet international standards.

Technical Information

Fire Resistance

- Classified as Class O product
- Class 1 Surface Spread of Flame (BS 476 Part 7)
- Does not produce toxic fumes or hazardous substance that are harmful to health.
- Provides up to 240 minutes fire resistance (BS 476 Part 22) (depending on system design)

Thermal Insulation

- Thermal resistance value (R) between 0.06 - 0.1 sq m K/W (depending on thickness)
- Low thermal convection (U) between 10 - 16.7 K/W (depending on thickness)


Workability

- Lightweight
- Quick and easy installation

Thickness

Metric	Imperial
9 mm	3/8"
12.5 mm	1/2"
15 mm	5/8"

Edge Type

- Square Edge (SE) 
- Recessed Edge (RE) 

Nominal Sizes

- 1200 mm x 2400 mm
- 1220 mm x 2440 mm (4' x 8')

Other sizes are available - Please contact Customer Service

Standards

- ASTM C 1396
- BS EN 520 (BS 1230)
- BS 476 Part 6
- BS 476 Part 7
- BS 476 Part 22
- ISO 9001
- ISO 14001




Steel Frame Fire & Acoustic Systems

BS


Summary table - 50mm 'C' Studs - single and double layer board linings

1




One layer of board each side of 50mm 'C' stud at 600mm centres.

2




One layer of board each side of 50mm 'C' stud at 600mm centres. 25mm glasswool at 16kg/m³ in the cavity.

3




One layer of board each side of 50mm 'C' stud at 600mm centres. 30mm rockwool at 41kg/m³ in the cavity.

4



Two layers of board each side of 50mm 'C' stud at 600mm centres.

5



Two layers of board each side of 50mm 'C' stud at 600mm centres. 25mm glasswool at 16kg/m³ in the cavity.

Detail	Board type	Lining thickness mm	Partition thickness mm	Sound insulation R _w dB	Approx. weight kg/m ²
30 minutes fire resistance BS					
1	Regular	1 x 12.5	75	34	18
1	Regular	1 x 15	80	36	21
2	Regular	1 x 12.5	75	40	18
2	Regular	1 x 15	80	42	21
60 minutes fire resistance BS					
1	FireStop	1 x 15	80	36	24
2	FireStop	1 x 15	80	42	24
3	FireStop	1 x 12.5	75	40	20
4	Regular	2 x 12.5	100	42	35
5	Regular	2 x 12.5	100	49	35
120 minutes fire resistance BS					
4	FireStop	2 x 12.5	100	42	40
5	FireStop	2 x 12.5	100	49	40

NB The fire resistance and sound insulation performances are for imperforate partitions incorporating boards with all joints taped and finished according to BPB's recommendations. Any variations in the specification should be checked with BPB Asia or the local authorized distributor.

With Gyproc systems, you can enjoy the following benefits:



Robust walls that are sturdy and durable enabling heavy weight applications of up to 130kg
i.e. A wall mounted 42" Plasma TV max weighs 44kg and 55" weighs 55kg



Flexibility in creating and dividing living spaces according to your needs



Versatility of the systems enable use in all internal areas of your home and commercial spaces



Aesthetic appeal that result in seamless and crack-free surfaces, allowing ease of decoration via paint, tiles or wallpapers



Excellent **thermal insulation** to help reduce electricity consumption especially in rooms with air conditioning



Excellent **sound insulation** that provides a pleasant and peaceful environment in your home and commercial spaces i.e. To achieve the same level of sound insulation, a GypWall system (with insulation) is approximately 1/10 of the weight of conventional brickwall in total wall build-up



Fire-rated wall and ceiling systems limit internal fire spread to enable you to exit safely in the event of fire




Moisture resistant properties enabling usages in intermittently damp areas such as bathrooms and kitchen



Environmentally friendly as Gyproc boards are made of 100% natural gypsum which are non-toxic and non-hazardous



Gyproc boards are **recyclable**

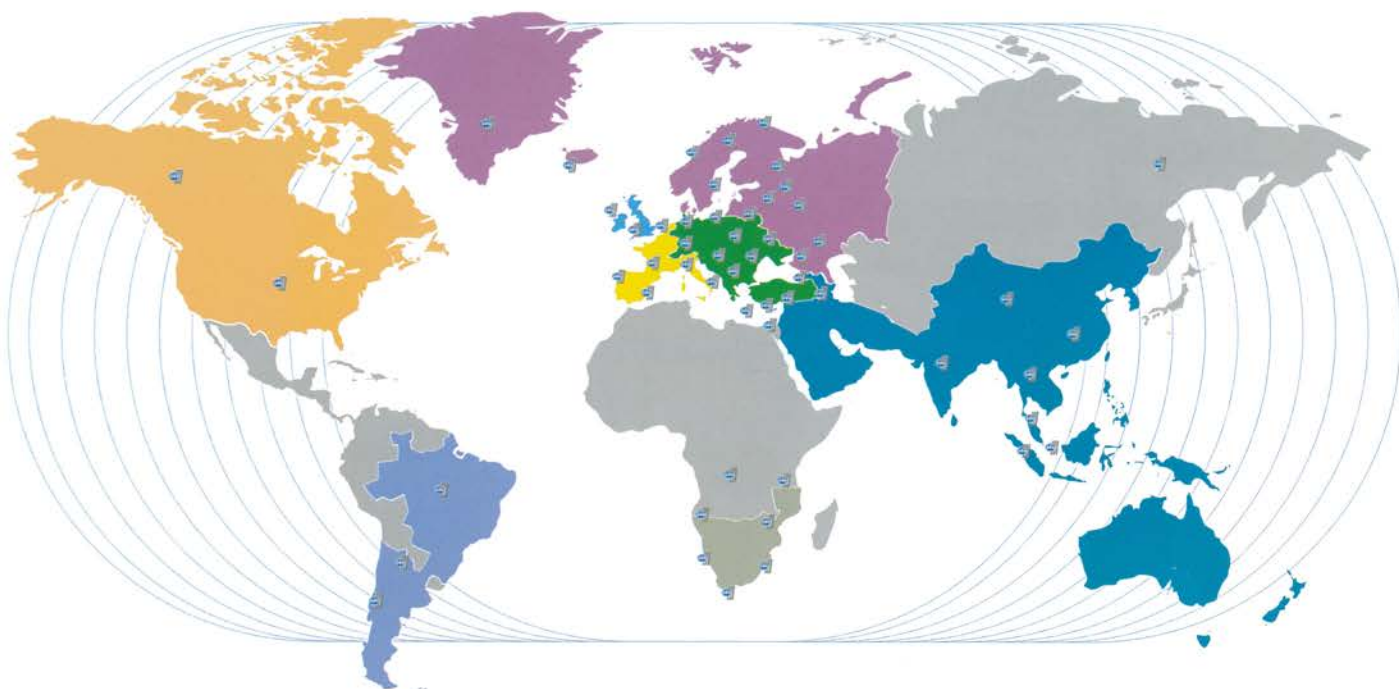

BPB: The Group

BPB is the world leader in the supply of plasterboard and gypsum plasters, and a major supplier of insulation, ceiling tiles and related products for interiors. BPB has over 130 manufacturing plants distributed in more than 50 countries worldwide. In 2005, Saint-Gobain, one of the world's 100 largest industrial groups acquired BPB, creating the world No.1 in building materials. Saint-Gobain operates in more than 50 countries worldwide and fields a workforce of over 200,000.

BPB Asia

BPB Asia, the regional arm of BPB, is located in Bangkok, Thailand, from where BPB coordinates supply to over 28 countries throughout the Asia-Pacific region from its manufacturing sites within the Asia region (Thailand, Malaysia, China and India) and from Europe and North America.

Within Asia, BPB manufacturing companies operate independently verified quality assurance systems to BS EN ISO 9001, and maintain the quality and leading edge performance of their products and systems through an ongoing program of research and development and testing. This is done in conjunction with the BPB Building Test Center in the UK, and in-house fire, acoustic and system testing facility which is unique among building product manufacturers and matches the best available anywhere in the world. The Building Test Centre is fully UKAS accredited.

BPB Asia

Regional Headquarters:
Gypsum Metropolitan Tower
539/2 Si Ayutthaya Road,
Khet Ratchathewi,
Bangkok 10400 Thailand

Distributed By:

KIRII (HONG KONG) LIMITED

G/F., 167 & 169 Hoi Bun Road,
Kwun Tong, Kowloon.

Tel : (852) 2797 2026

Fax : (852) 2341 2618

Email : info@kirii.com.hk