



James Hardie

HardiWall™ Solid Wall System

For Internal Walls



Faster, more Efficient Solid Wall Construction

James Hardie, one of Australia's largest international building materials companies and a world leader in fibre cement technology and innovative building solutions, has developed an exciting new solid wall concept.

By combining the speed, flexibility and efficiency of framed construction with core filling technology, James Hardie has radically changed the way the market thinks about solid wall construction.



REDUCED CONSTRUCTION COSTS

- Is a cost effective alternative to masonry or pre-cast internal wall systems.
- Provides for considerable savings in construction time and labour.
- Minimises site waste therefore less waste removal and dumping costs.
- Reduces structural design requirements due to lighter weight wall construction.
- Allows for increased floor space due to thinner walls.



GREATER EASE OF CONSTRUCTION.

- Allows greater flexibility on site through framed construction.
- Readily accommodates architectural requirements e.g. high walls and curved walls.
- Allows easy installation of services - no chasing
- Allows trades to be easily organised and co-ordinated.



FASTER SPEED OF INSTALLATION

- Allows wall construction to be completed faster.
- Is up to 3 times faster to install than masonry.
- Eliminates time consuming traditional site practices.



IMPROVED SITE CLEANLINESS AND SAFETY

- Eliminates site mess on each floor - no wet trades.
- Provides for a much safer site.
- Eliminates the need to handle heavy materials.



HIGH QUALITY WALL FINISH

- Provides for a very smooth flat finish.
- Provides for a simple jointing system to give a joint free finished wall appearance.
- Eliminates the need for rendering to finish the wall surface.



STRONG, SOLID WALLS

- Provides the solid feel and sense of security traditionally associated with masonry walls.
- Meets internal wall performance requirements.

The **Complete** Internal Wall System

The **HardiWall™** Solid Wall System is an internal non-load bearing wall comprising light gauge galvanised steel stud framing, lined with **HardiWall™** fibre cement sheets and filled with a proprietary lightweight concrete core mix.

Each of the proprietary components have been designed, developed and tested as part of the system to contribute to the overall ease of installation and to improve the overall system performance.


1. HardiWall™ Framing System uses light gauge galvanised steel studs, specially designed for use with James Hardie's innovative sheet fixings.



2. HardiWall™ Sheet is a purpose-designed and manufactured fibre cement sheet for application in the HardiWall™ System. It contains no asbestos, is autoclaved to provide dimensional stability and is tough and strong to resist the significant hydrostatic and impact stresses that result from core filling.



3. HardiDrive™ Fixings are designed specially for the framing system to facilitate quick and easy HardiWall™ Sheet fixing.

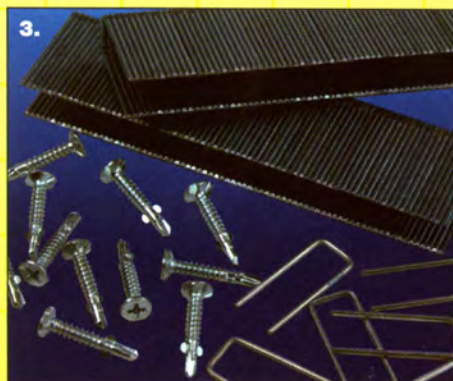

4. HardiAdd™ Core Mix Additive is designed to provide consistent density control for the lightweight concrete core mix. It gives consistent mix pumpability, excellent flow and levelling characteristics, and strong bond between core and sheet.




5. HardiFlow™ Meter is a specialist mechanical device to measure the workability of the lightweight concrete core mix to ensure mix consistency and quality.




6. HardiStop™ Base Coat is a ready-to-use, water-resistant, strong, jointing compound specially tailored for flush jointing the HardiWall™ Solid Wall System.




The **HardiWall™** Solid Wall System

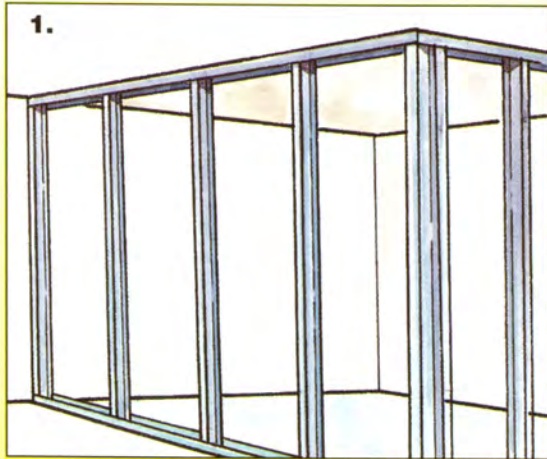

1. Fix steel top and bottom tracks to ceiling and floor and install the light gauge steel stud framing.

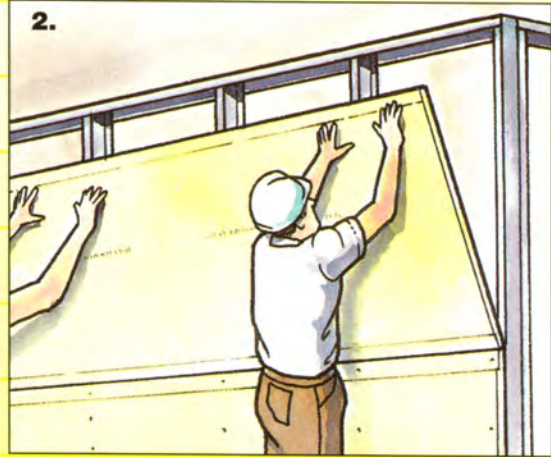


2. Attach HardiWall™ Sheets to one side of the frame using appropriate HardiDrive™ Fixings.

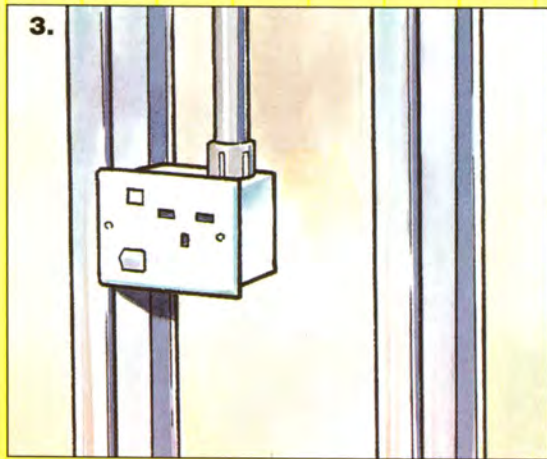


3. Install door frames and plumbing and electrical services where required.



4. Complete sheathing of the wall by fixing HardiWall™ Sheets to the other side of the frame.

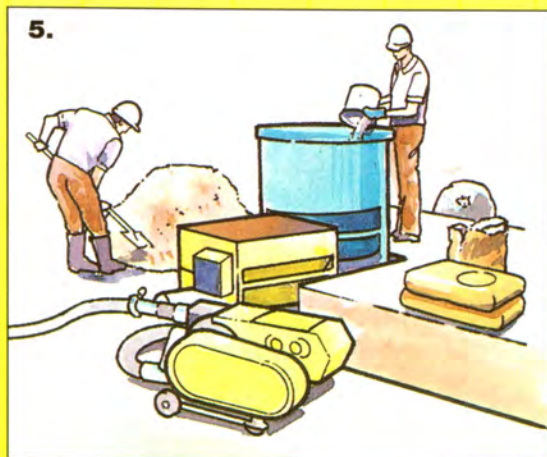


5. Prepare the core mix using HardiAdd™ Core Mix Additive with the specified mix ingredients at the designated mixing station.

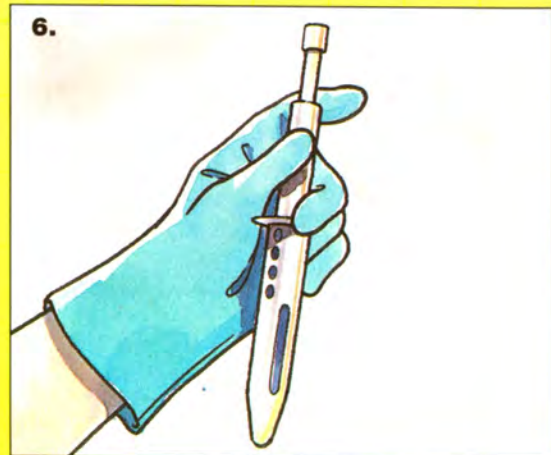


6. Check the mix consistency with the HardiFlow™ Meter to ensure optimum pumping performance. Then pump the mix to each floor.


System is **Quick** and **Easy**

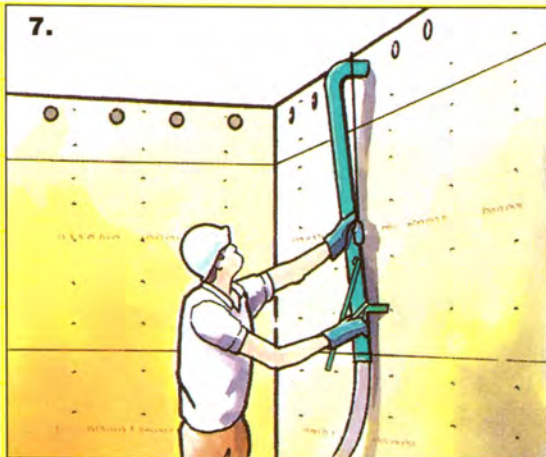


7. Provide fill holes at the top of the sheet and fill the wall cavity with the special lightweight concrete mix.

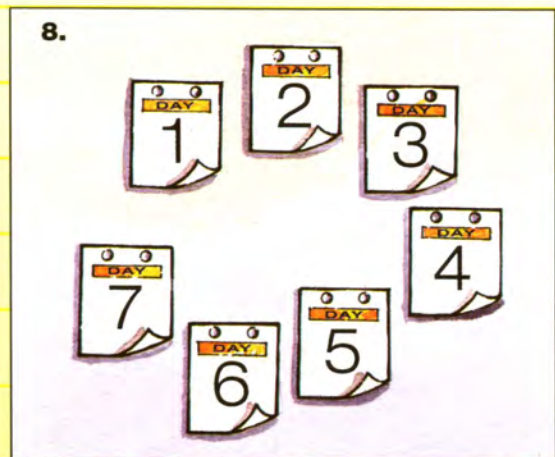

8. Wait for the wall to dry (7 days minimum) before finishing the wall.

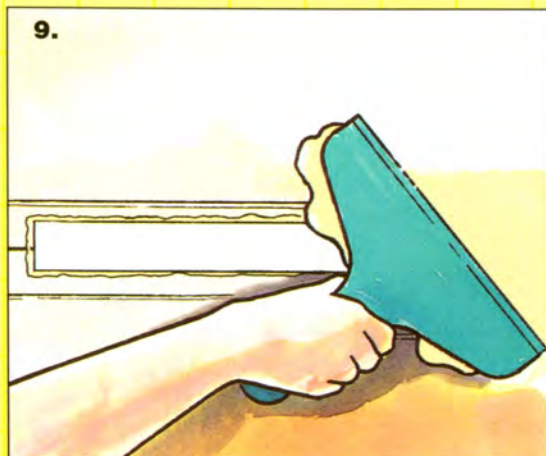

9. Apply HardiStop™ Base Coat and reinforcing tape to recessed and butt joints, internal and external corners as per James Hardie's jointing recommendations.

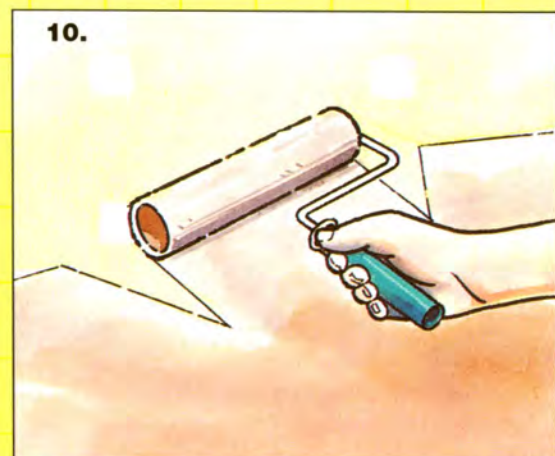


10. The wall is now ready for finishing.




All proprietary components of the James Hardie HardiWall™ Solid Wall System have been designed and tested to ensure they perform to the highest standards for internal walls.

The **Choice** is **Simple.**

Compare the benefits of the **HardiWall™** Solid Wall System to traditional masonry construction and you'll see it's the natural choice.

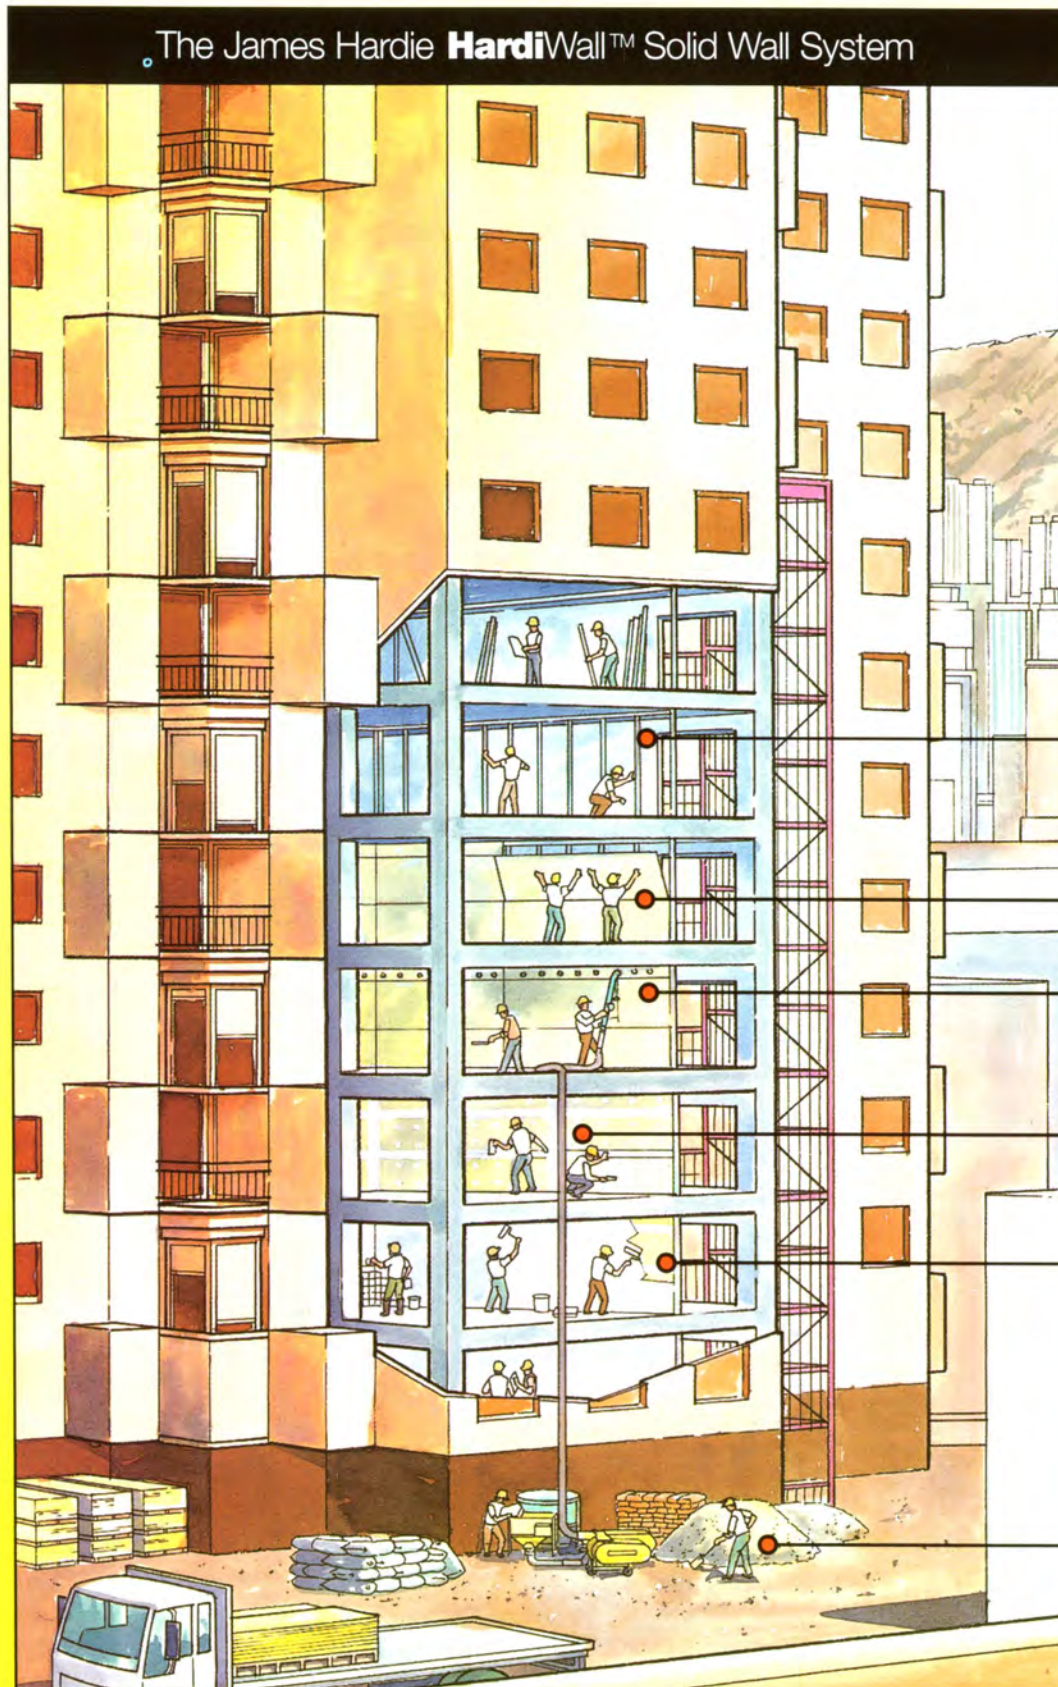

Traditional Masonry Construction

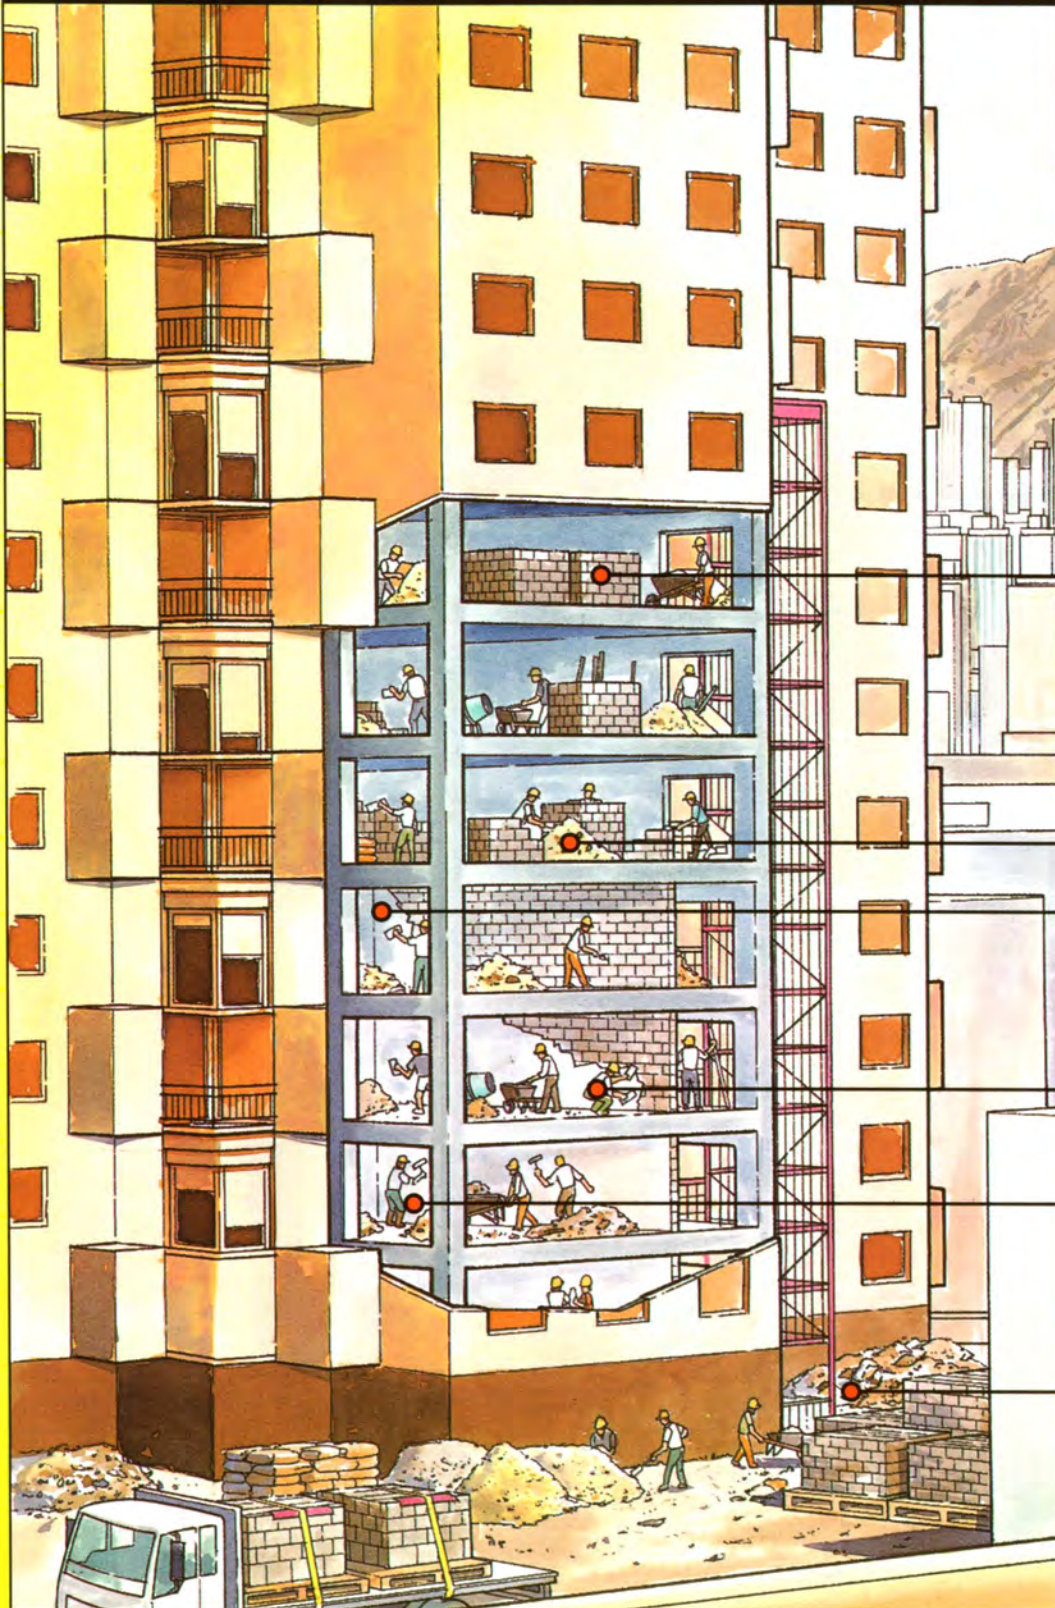

Extensive materials handling with heavy masonry blocks required each floor

Cluttered and messy work area

Slow rendering process with a consistent finish often difficult to achieve

More skilled trades people required

Installation of electrical and plumbing services require chasing and repair

Costly waste removal