2026 EDITION | REV. A

INDUSTRIAL ROTARY INTERFACES

# Rotary Joint Product Catalog

Pneumatic, Fluid and Custom Rotary Joint Solutions

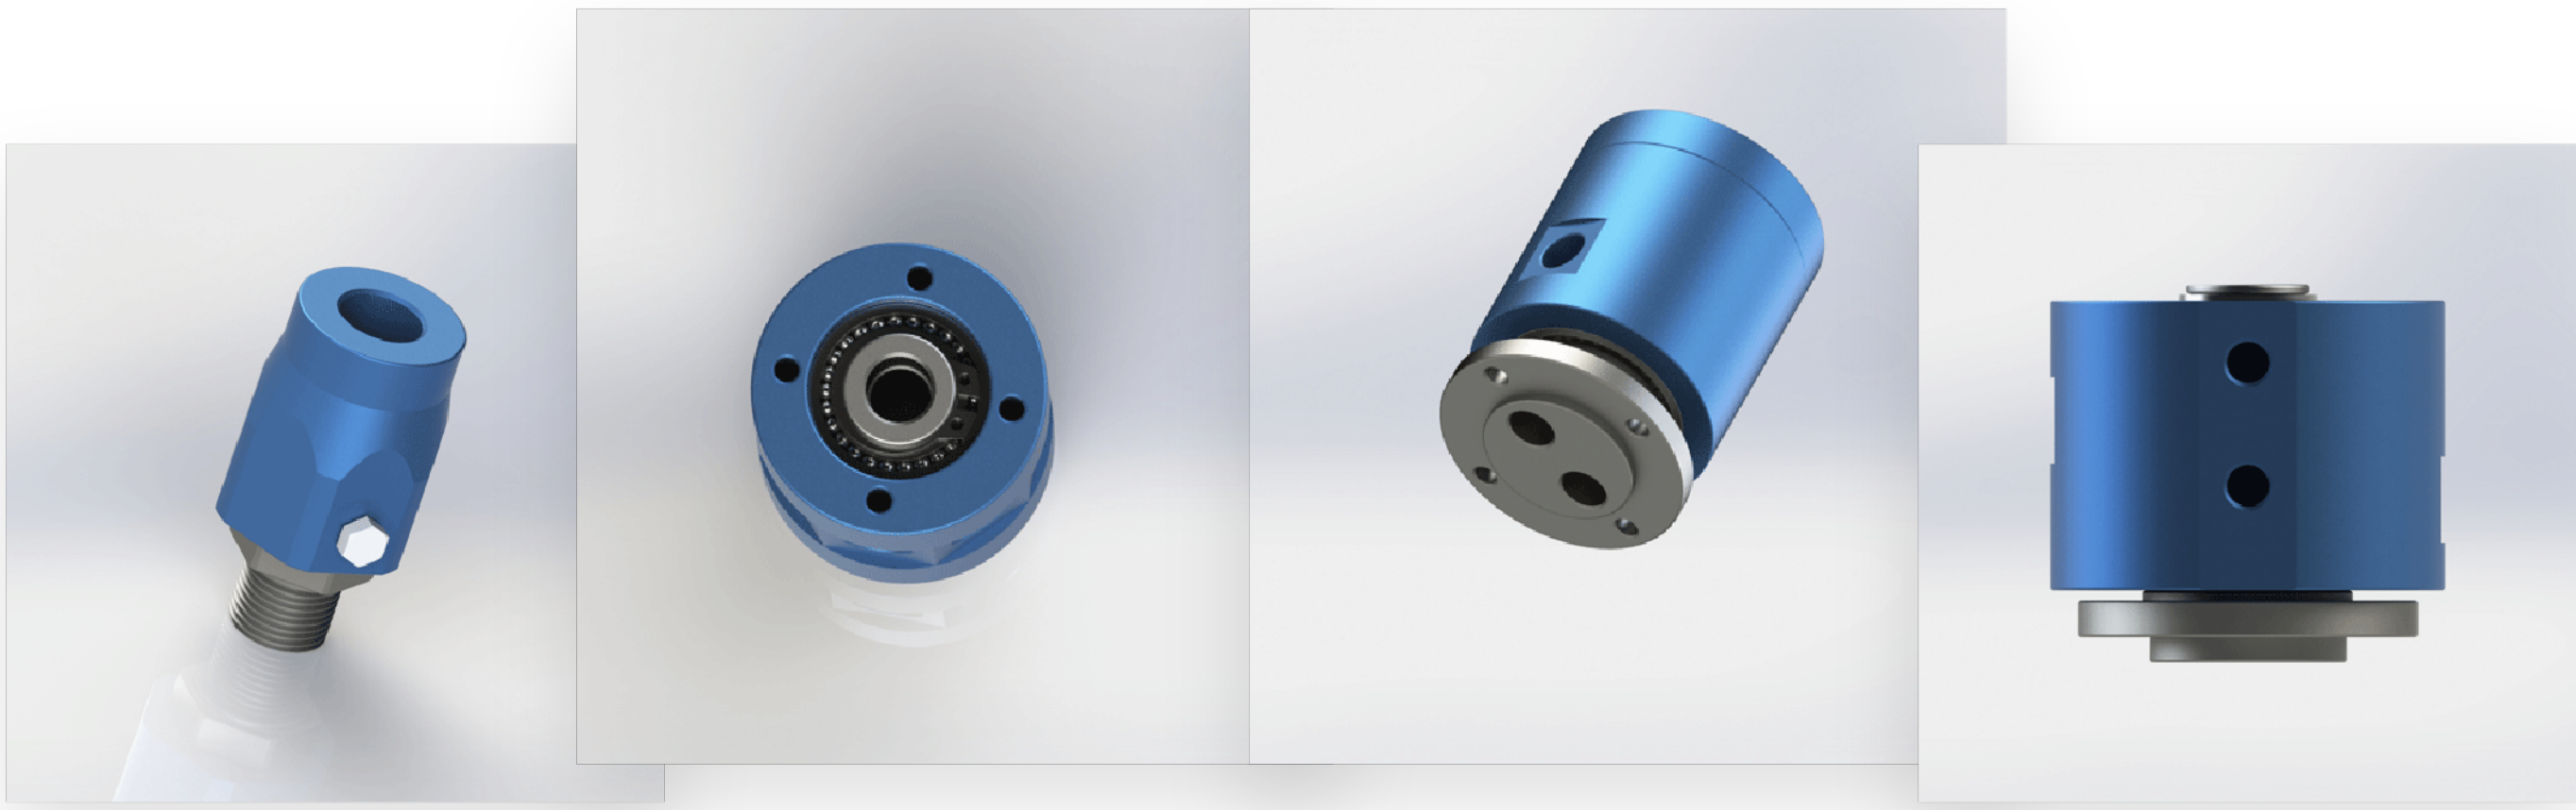

www.begapunk.com

ABOUT

# About Begapunk

**Ningbo Begapunk Pneumatic Components Co., Ltd. develops and supplies rotary joint solutions for pneumatic, fluid-transfer and customized rotating-interface applications.**

Our product work focuses on model selection, interface configuration, installation compatibility and application-specific customization.

For applications that cannot be served by a standard model, customers may provide operating conditions, installation drawings or reference samples for engineering review.

BEGAPUNK®

www.begapunk.com
sales@begapunk.com

| | |
|---|---|
| COMPANY | Ningbo Begapunk Pneumatic Components Co., Ltd. |
| LOCATION | Ningbo, China |
| PRODUCT FOCUS | Pneumatic and fluid rotary joints |
| ENGINEERING SUPPORT | Standard selection and custom evaluation |

ENGINEERING INPUTS

# How to Select a Rotary Joint

**01** **Medium**
Air, water, oil, coolant or combined media.

**02** **Number of Passages**
Confirm the number of independent flow channels.

**03** **Working Pressure**
Provide normal and maximum pressure.

**04** **Rotational Speed**
Provide continuous and maximum rpm.

**05** **Port Size**
Confirm thread type, tube size and flow requirement.

**06** **Mounting Method**
Confirm rotor and housing installation interfaces.

**07** **Operating Temperature**
Provide minimum and maximum temperatures.

**08** **Installation Envelope**
Provide diameter, length and surrounding clearance.

**09** **Duty Cycle**
Continuous, indexing or intermittent rotation.

**10** **Leakage Requirement**
State whether minor controlled leakage is acceptable.

**SELECTION NOTE**

Rotational speed must not be evaluated independently. Seal diameter, pressure, medium, temperature, duty cycle and shaft runout can materially affect rotary-joint selection.

SHORTLIST

# Selected Rotary Joint Models

Page 1 of 2 | Confirm final limits against the approved drawing.

| Model | Configuration | Pressure | Speed | Mounting |
|---|---|---|---|---|
| BP-1P-0003 | 1-in-1-out (single passage) | 10 bar | 500 rpm | Threaded connection |
| BP-1P-0006 | 1 inlet / 8 outlets | 10 bar | 300 rpm | 4 x M4 mounting holes at each end |
| BP-2P-0001 | 2-in-2-out (dual passage) | 10 bar | 200 rpm | 4 x M5 rotor mount; 4 x M5 anti-rotation mount |
| BP-2P-0002 | 2-in-3-out (2 inlets, 3 outlets) | 10 bar | 300 rpm | M5, M6 and M8 mounting features; see drawing |
| BP-2P-08-0001 | 2 Passages (2-in-2-out) | 10 bar | 200 rpm | 4 x M4, depth 10 mm |
| BP-2P-130-0001 | 2-in-2-out (dual passage) | 50 bar | 80 rpm | M10 mounting features; see drawing |
| BP-2P-16-0001 | 2-in-2-out (16mm Bore) | 10 bar | 200 rpm | 4 x M5 stator mount; 4 x M5 rotor mount |
| BP-2P-30-0001 | 2-in-2-out (dual passage) | 10 bar | 150 rpm | 4 x M5 mounting holes at each end |

**Pressure** Maximum drawing value **Speed** Maximum drawing value **Contact us** Source confirmation required

SHORTLIST

# Selected Rotary Joint Models

Page 2 of 2 | Confirm final limits against the approved drawing.

| Model | Configuration | Pressure | Speed | Mounting |
|---|---|---|---|---|
| **BP-2P-50-0001** | 2-in-2-out (dual passage) | 10 bar | 100 rpm | 4 x M5 stator mount, depth 10 mm; 6 x M5 rotor mount, depth 8 mm |
| **BP-2P-95-0001** | 2-in-4-out (2 inlets, 4 outlets) | 10 bar | 200 rpm | 6 x M5 and 8 x M8 mounting holes, depth 12 mm |
| **BP-3P-0004** | 3-in-3-out (triple passage) | 10 bar | 200 rpm | 4 x M6 stator mount; 4 x M6 rotor mount |
| **BP-3P-0006** | 3-in-3-out (triple passage) | 10 bar | 200 rpm | 4 x M6 stator mount; 3 x M6 rotor mount |
| **BP-3P-0007** | 3-in-3-out (triple passage) | 10 bar | 200 rpm | 3 x M5 and 3 x 6 mm mounting holes |
| **BP-3P-S06-0001** | 3-in-3-out (triple passage) | 10 bar | 200 rpm | 2 x M5, depth 10 mm; 3 x M5, depth 8 mm |
| **BP-4P-30-0001** | 4-in-4-out (quad passage, Dia. 30mm hollow bore) | 10 bar | 200 rpm | 4 x M5 stator mount, depth 12 mm; 6 x M6 rotor mount |
| **BP-8P-0001** | 8-in-8-out (8 passages) | 10 bar | 200 rpm | 4 x M5 stator mount; 4 x M5 rotor mount |

**Pressure** Maximum drawing value **Speed** Maximum drawing value **Contact us** Source confirmation required

MODEL

# BP-1P-0003

- 1-in-1-out Rotary Joint

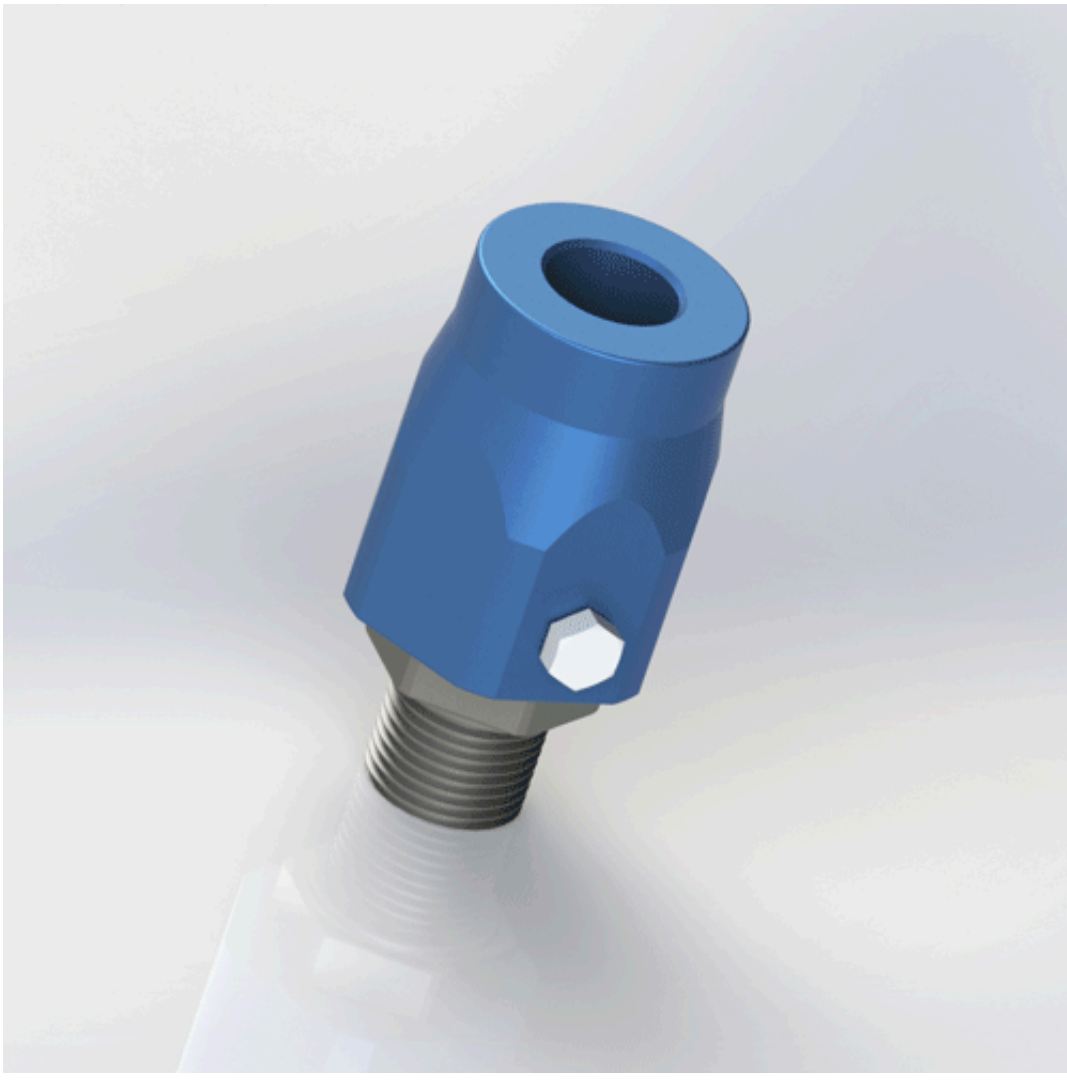

DIMENSIONAL REFERENCE

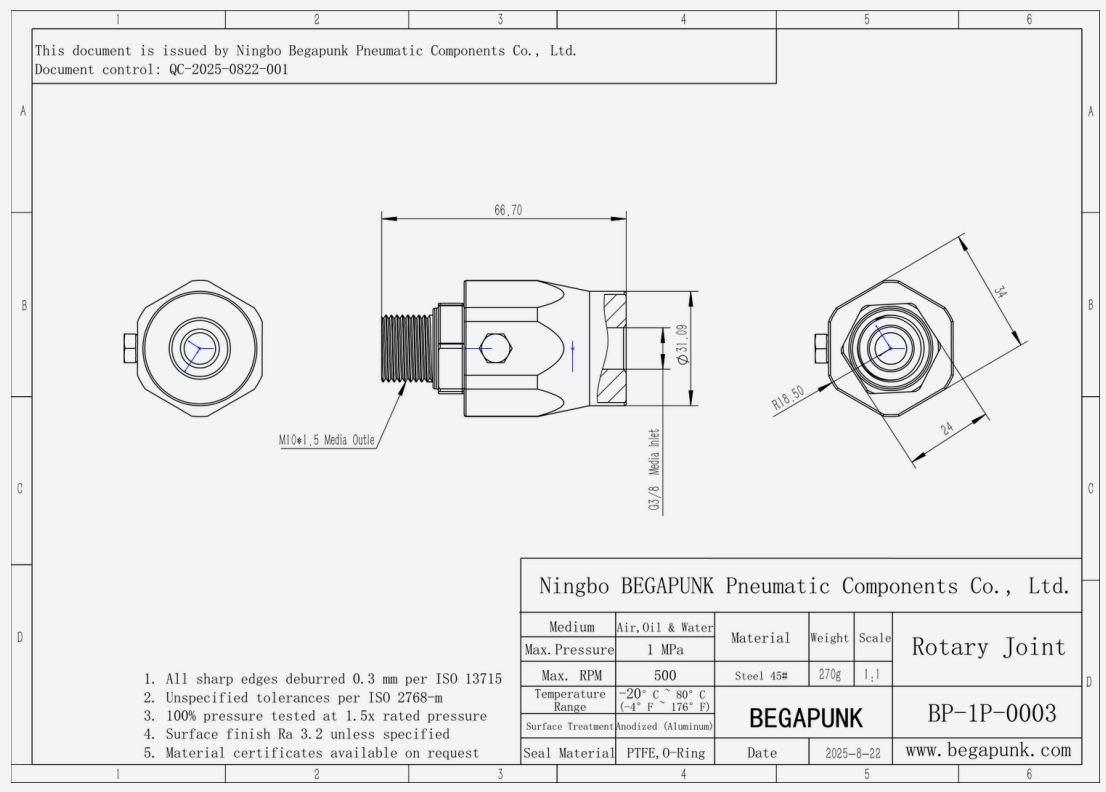


## PRODUCT OVERVIEW

The BP-1P-0003 is configured as 1-in-1-out (single passage). The drawing specifies threaded connection. The engineering drawing identifies Air, oil, water as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 1-in-1-out (single passage)
- Threaded connection
- G3/8 inlet; M10 x 1.5 outlet

| | |
|---|---|
| **Configuration** | 1-in-1-out (single passage) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 500 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | Threaded connection |
| **Ports / threads** | G3/8 inlet; M10 x 1.5 outlet |
| **Body material** | Steel 45# |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 0.27 kg |
| **Drawing medium** | Air, oil, water |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-1P-0006

1-in-8-out Rotary Joint

DIMENSIONAL REFERENCE

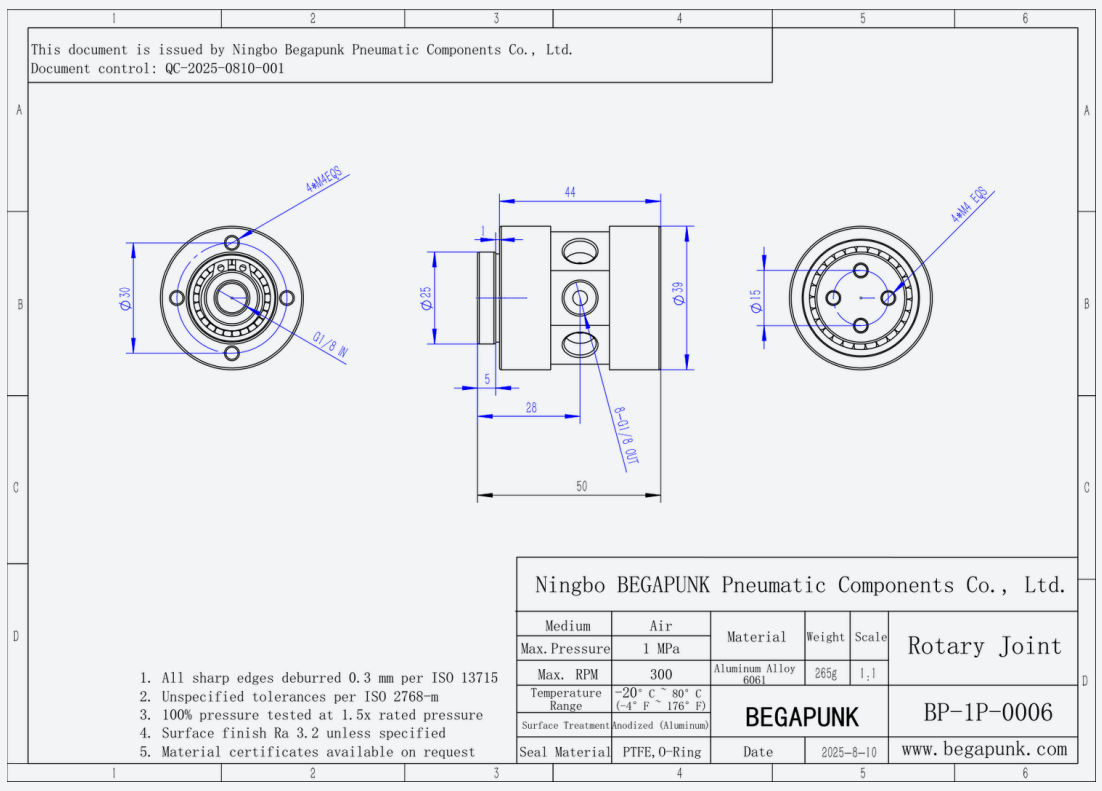


## PRODUCT OVERVIEW

The BP-1P-0006 is configured as 1 inlet / 8 outlets. The drawing specifies 4 x m4 mounting holes at each end. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 1 inlet / 8 outlets
- 4 x M4 mounting holes at each end
- G1/8 inlet; 8 x G1/8 outlets

| | |
|---|---|
| Configuration | 1 inlet / 8 outlets |
| Maximum pressure | 1 MPa / 10 bar |
| Maximum speed | 300 rpm |
| Temperature range | -20 to 80 deg C |
| Mounting | 4 x M4 mounting holes at each end |
| Ports / threads | G1/8 inlet; 8 x G1/8 outlets |
| Body material | Aluminum Alloy 6061 |
| Seal | PTFE, O-Ring |
| Drawing weight | 0.265 kg |
| Drawing medium | Air |

View Product Online Download 2D Drawing Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

**MODEL**

# BP-2P-0001

2-in-2-out Rotary Joint

DIMENSIONAL REFERENCE

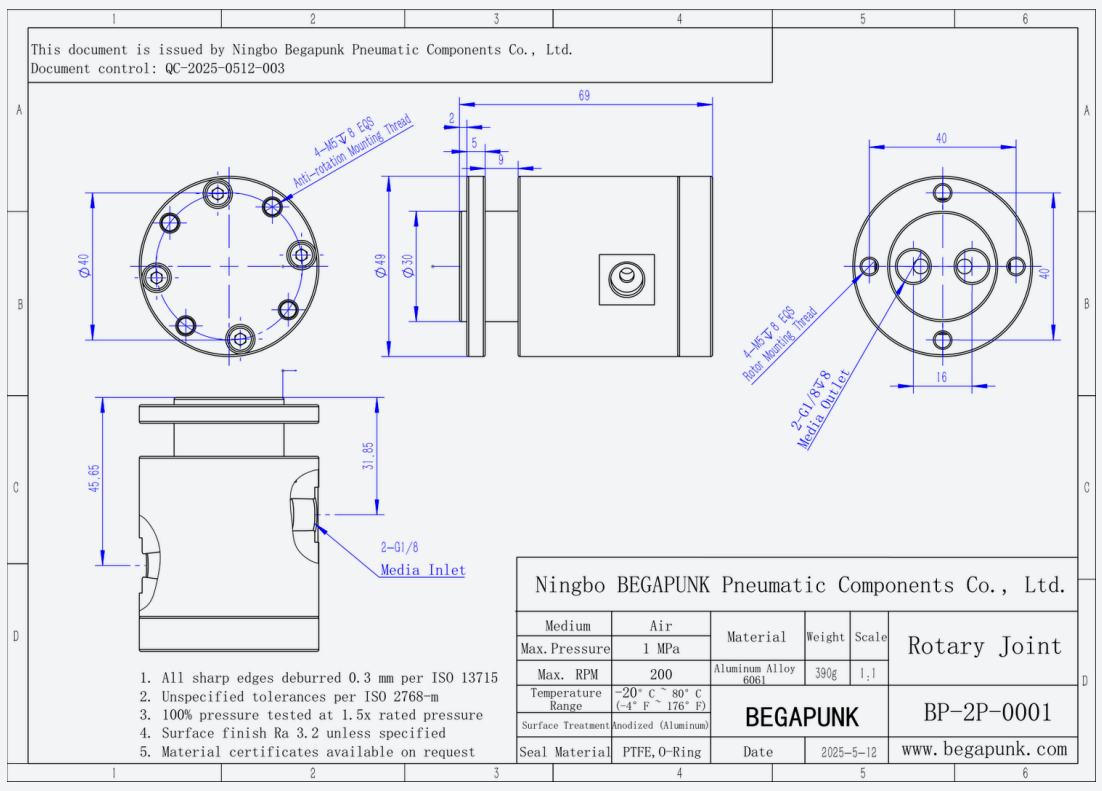


## PRODUCT OVERVIEW

The BP-2P-0001 is configured as 2-in-2-out (dual passage). The drawing specifies 4 x m5 rotor mount; 4 x m5 anti-rotation mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2-in-2-out (dual passage)
- 4 x M5 rotor mount; 4 x M5 anti-rotation mount
- 2 x G1/8 inlets; 2 x G1/8 outlets

| | |
|---|---|
| **Configuration** | 2-in-2-out (dual passage) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 200 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 4 x M5 rotor mount; 4 x M5 anti-rotation mount |
| **Ports / threads** | 2 x G1/8 inlets; 2 x G1/8 outlets |
| **Body material** | Aluminum Alloy 6061 |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 0.39 kg |
| **Drawing medium** | Air |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

**MODEL**

# BP-2P-0002

2-in-3-out (4mm) Rotary Joint

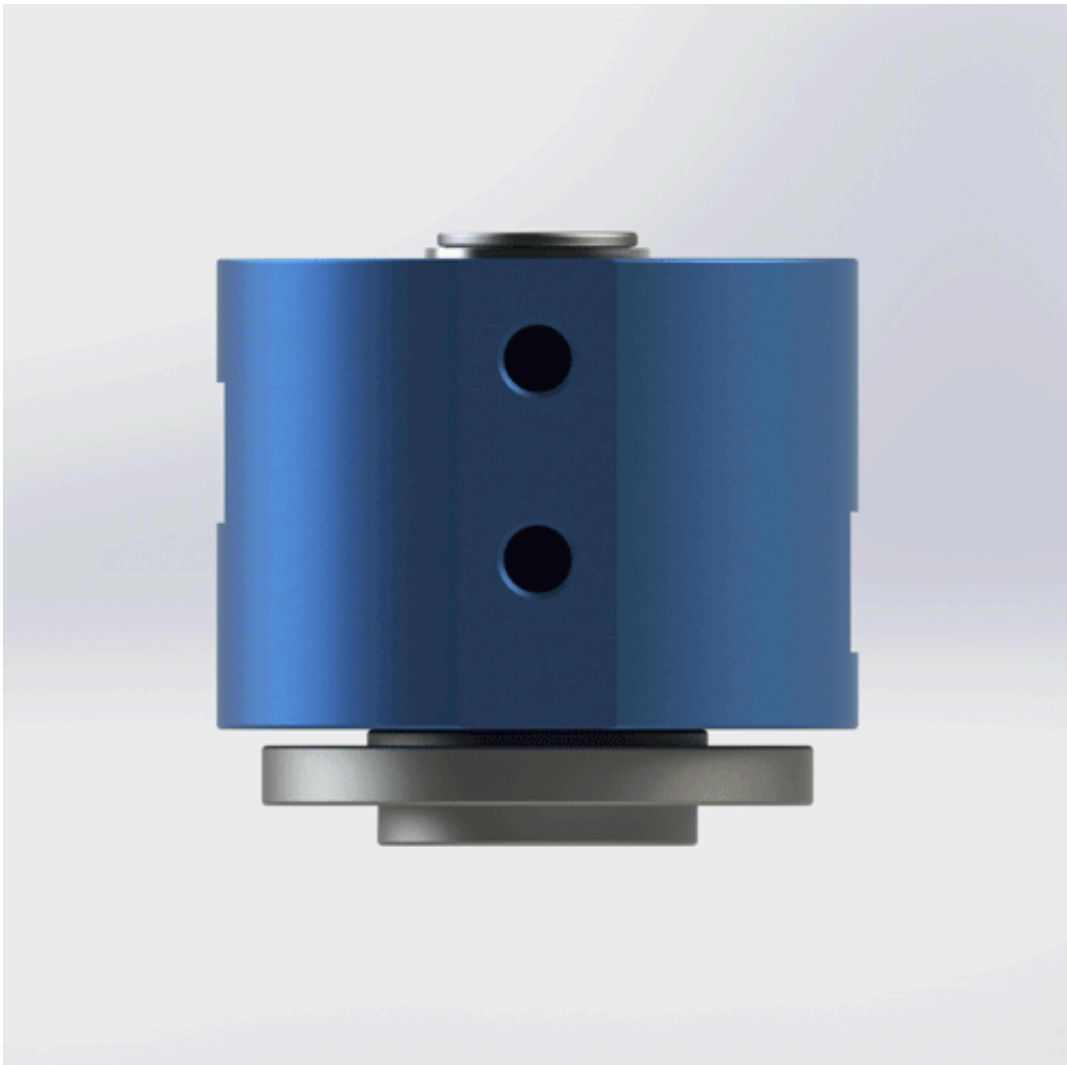

DIMENSIONAL REFERENCE

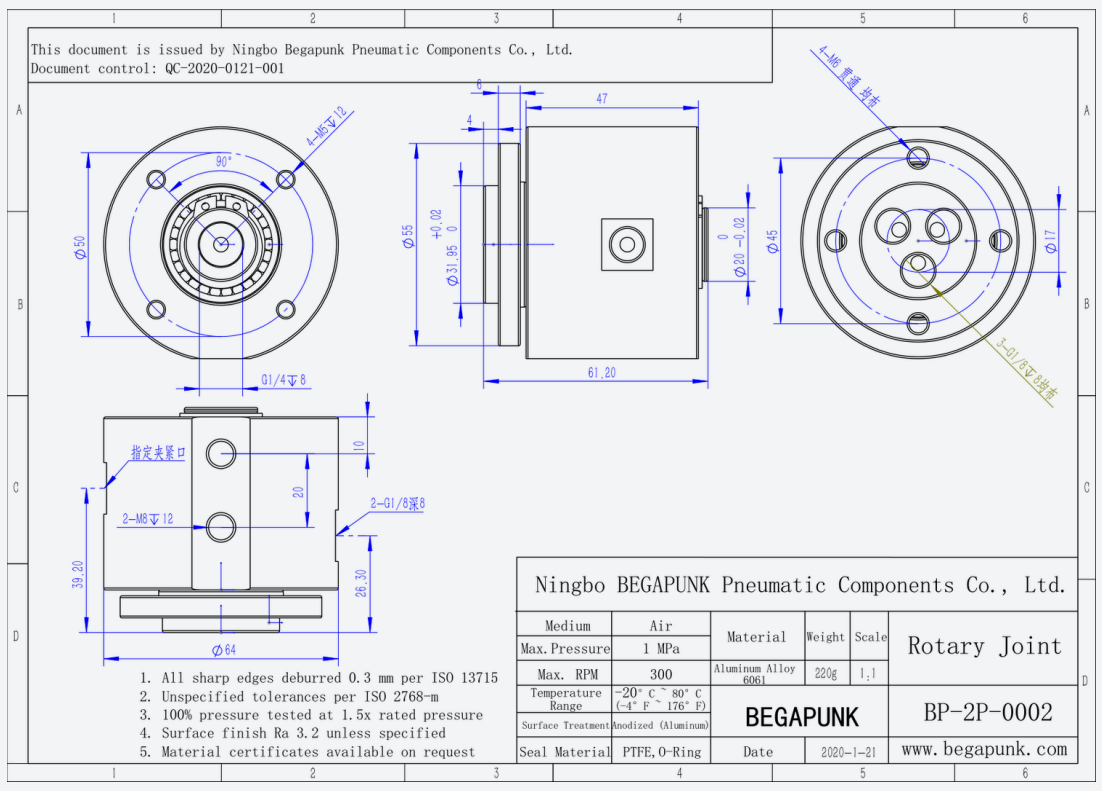


## PRODUCT OVERVIEW

The BP-2P-0002 is configured as 2-in-3-out (2 inlets, 3 outlets). The drawing specifies m5, m6 and m8 mounting features; see drawing. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2-in-3-out (2 inlets, 3 outlets)
- M5, M6 and M8 mounting features; see drawing
- G1/4 and G1/8 ports; see drawing

| | |
|---|---|
| **Configuration** | 2-in-3-out (2 inlets, 3 outlets) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 300 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | M5, M6 and M8 mounting features; see drawing |
| **Ports / threads** | G1/4 and G1/8 ports; see drawing |
| **Body material** | Aluminum Alloy 6061 |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 0.22 kg |
| **Drawing medium** | Air |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

**MODEL**

# BP-2P-08-0001

2-in-2-out Rotary Joint

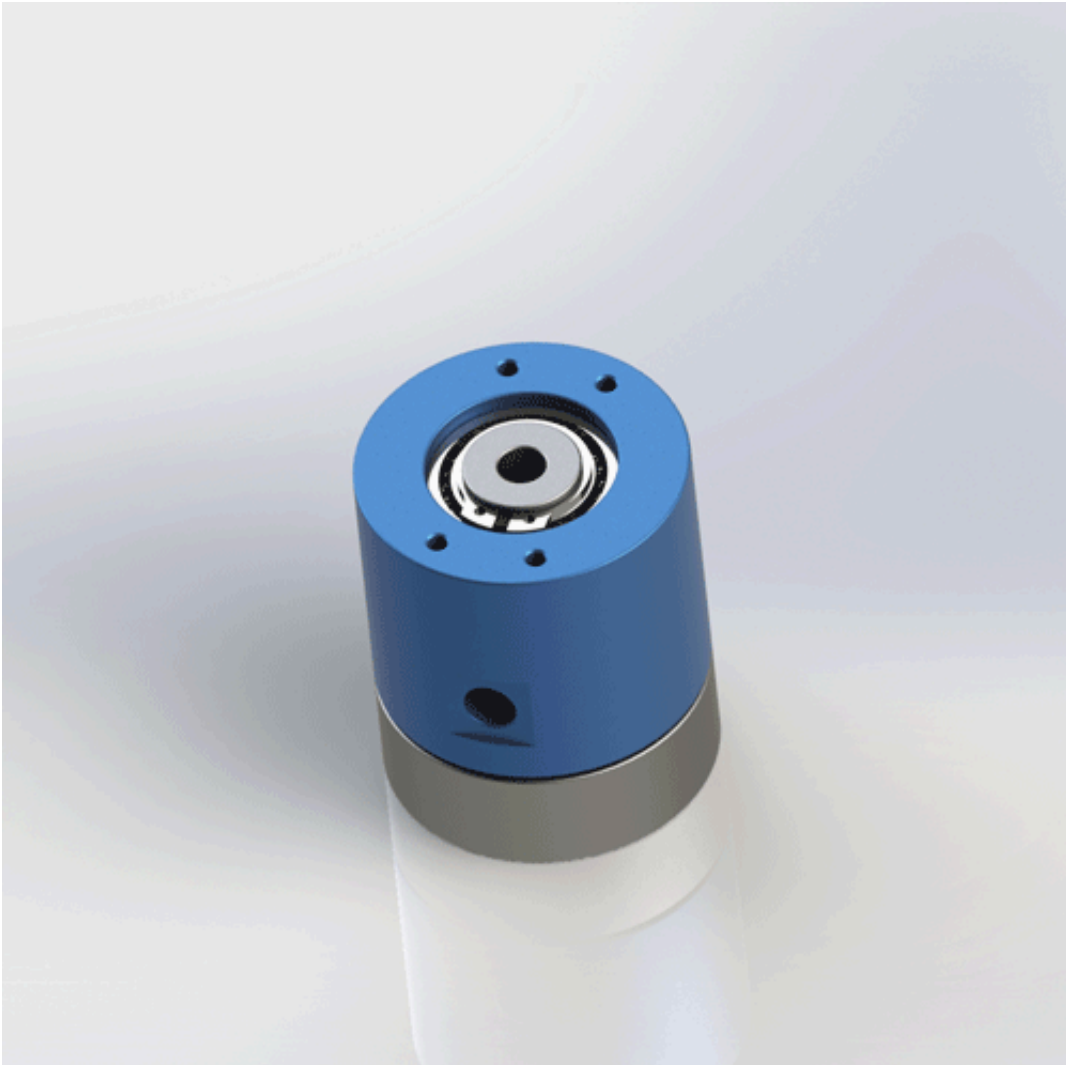

DIMENSIONAL REFERENCE

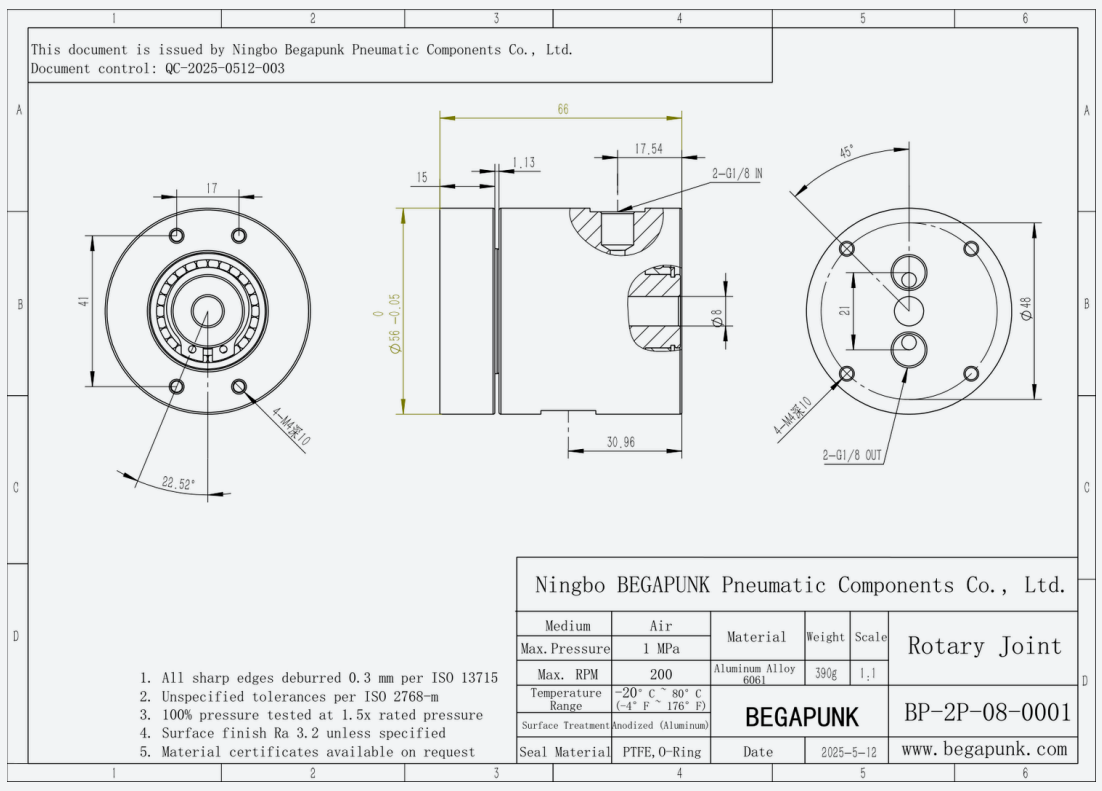


## PRODUCT OVERVIEW

The BP-2P-08-0001 is configured as 2 passages (2-in-2-out). The drawing specifies 4 x m4, depth 10 mm. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2 Passages (2-in-2-out)
- 4 x M4, depth 10 mm
- 2 x G1/8 inlets; 2 x G1/8 outlets

| | |
|---|---|
| **Configuration** | 2 Passages (2-in-2-out) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 200 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 4 x M4, depth 10 mm |
| **Ports / threads** | 2 x G1/8 inlets; 2 x G1/8 outlets |
| **Body material** | Aluminum Alloy 6061 |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 0.39 kg |
| **Drawing medium** | Air |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-2P-130-0001

2-in-2-out Rotary Joint

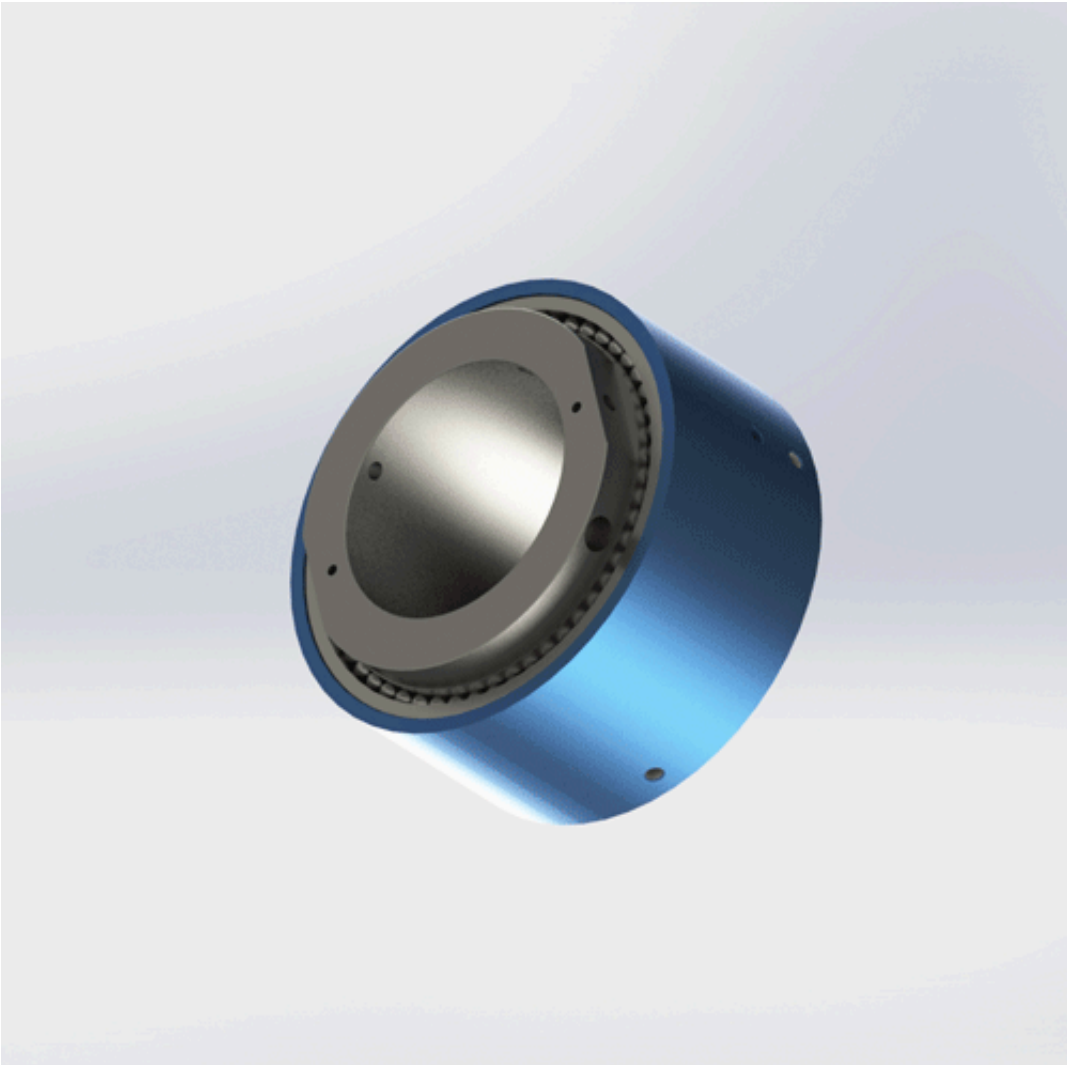

DIMENSIONAL REFERENCE

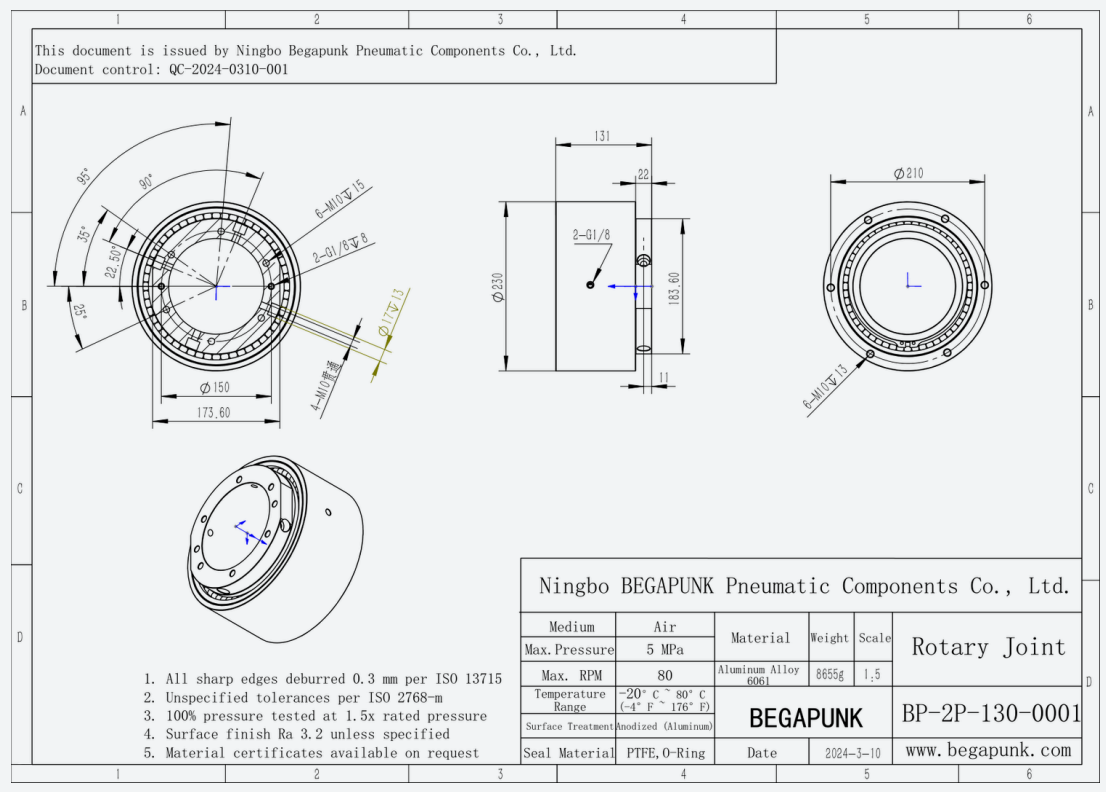


## PRODUCT OVERVIEW

The BP-2P-130-0001 is configured as 2-in-2-out (dual passage). The drawing specifies m10 mounting features; see drawing. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2-in-2-out (dual passage)
- M10 mounting features; see drawing
- 2 x G1/8 ports; see drawing

| | |
|---|---|
| Configuration | 2-in-2-out (dual passage) |
| Maximum pressure | 5 MPa / 50 bar |
| Maximum speed | 80 rpm |
| Temperature range | -20 to 80 deg C |
| Mounting | M10 mounting features; see drawing |
| Ports / threads | 2 x G1/8 ports; see drawing |
| Body material | Aluminum Alloy 6061 |
| Seal | PTFE, O-Ring |
| Drawing weight | 8.655 kg |
| Drawing medium | Air |

View Product Online    Download 2D Drawing    Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

**MODEL**

# BP-2P-16-0001

2-in-2-out (16mm Bore) Rotary Joint

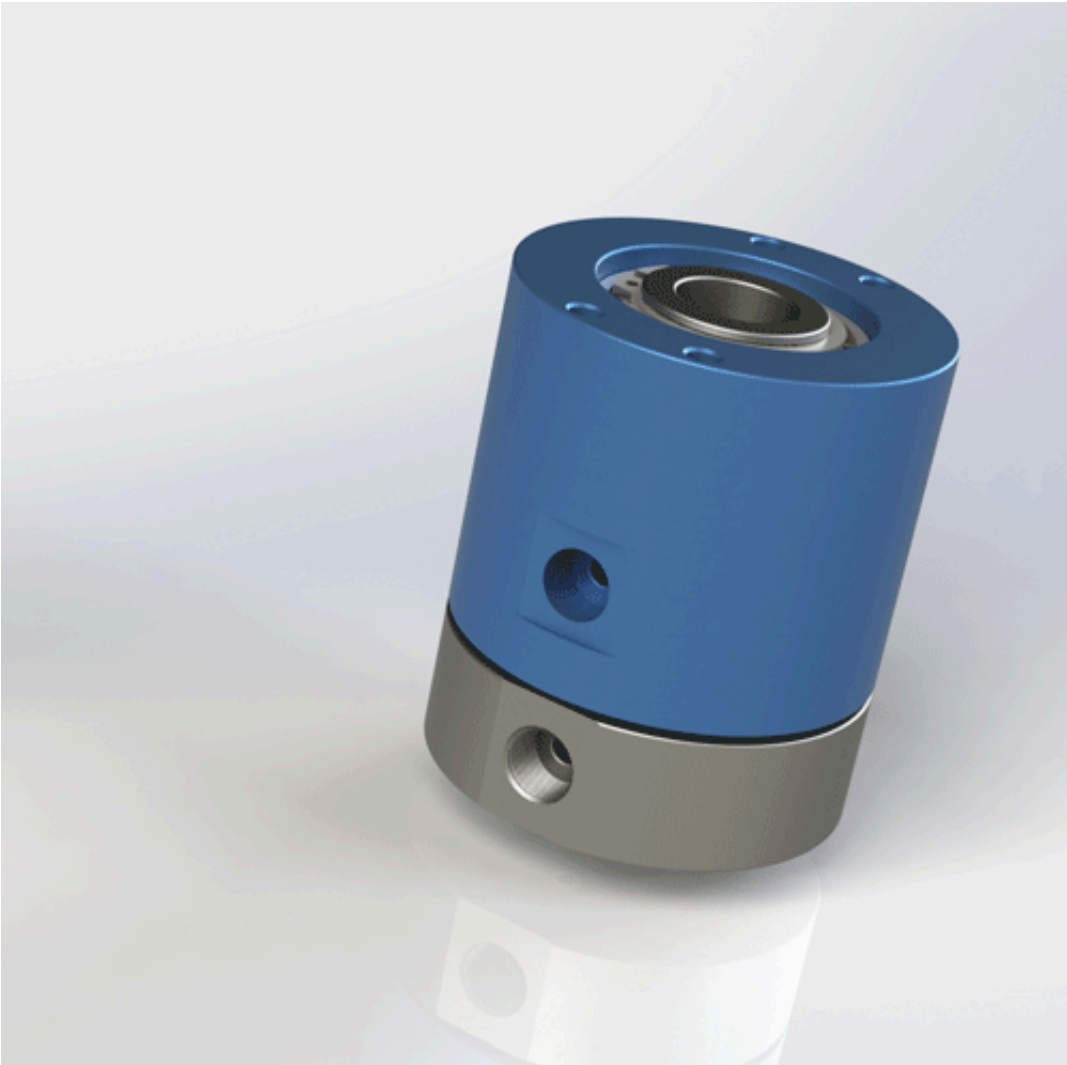

DIMENSIONAL REFERENCE

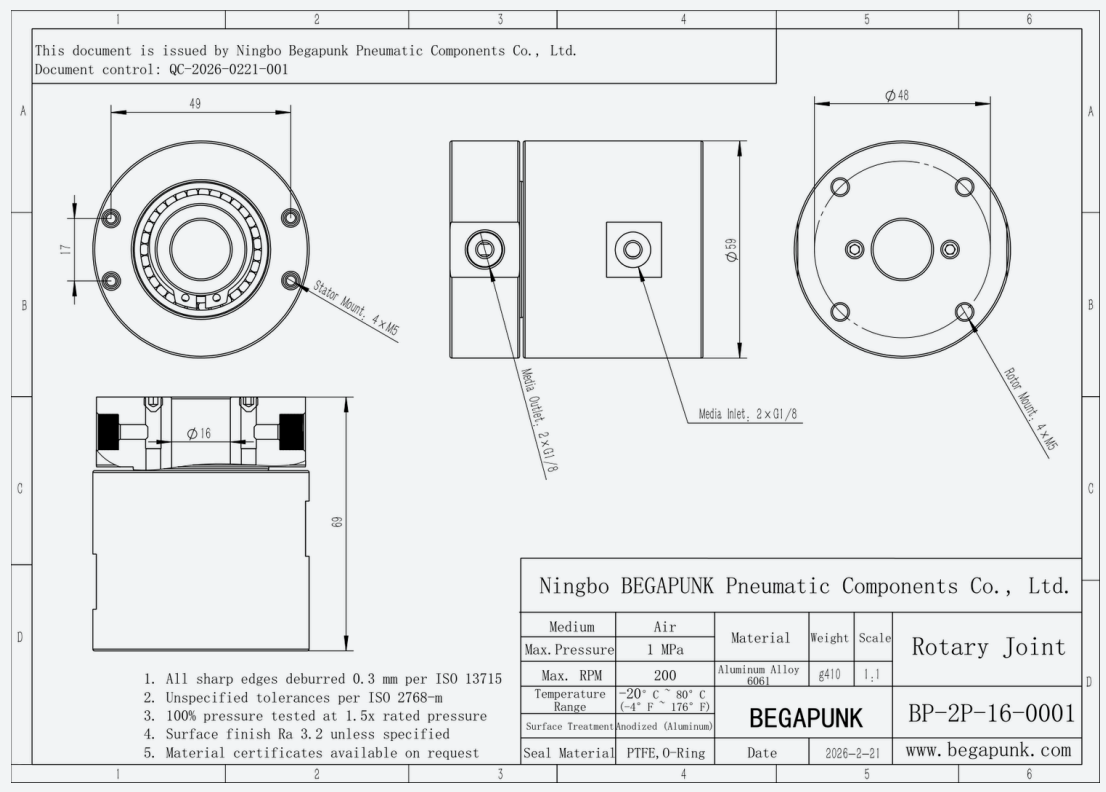


## PRODUCT OVERVIEW

The BP-2P-16-0001 is configured as 2-in-2-out (16mm bore). The drawing specifies 4 x m5 stator mount; 4 x m5 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2-in-2-out (16mm Bore)
- 4 x M5 stator mount; 4 x M5 rotor mount
- 2 x G1/8 inlets; 2 x G1/8 outlets

| | |
|---|---|
| **Configuration** | 2-in-2-out (16mm Bore) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 200 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 4 x M5 stator mount; 4 x M5 rotor mount |
| **Ports / threads** | 2 x G1/8 inlets; 2 x G1/8 outlets |
| **Body material** | Aluminum Alloy 6061 |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 0.41 kg |
| **Drawing medium** | Air |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

**MODEL**

# BP-2P-30-0001

2-in-2-out (Dia. 30mm) Rotary Joint

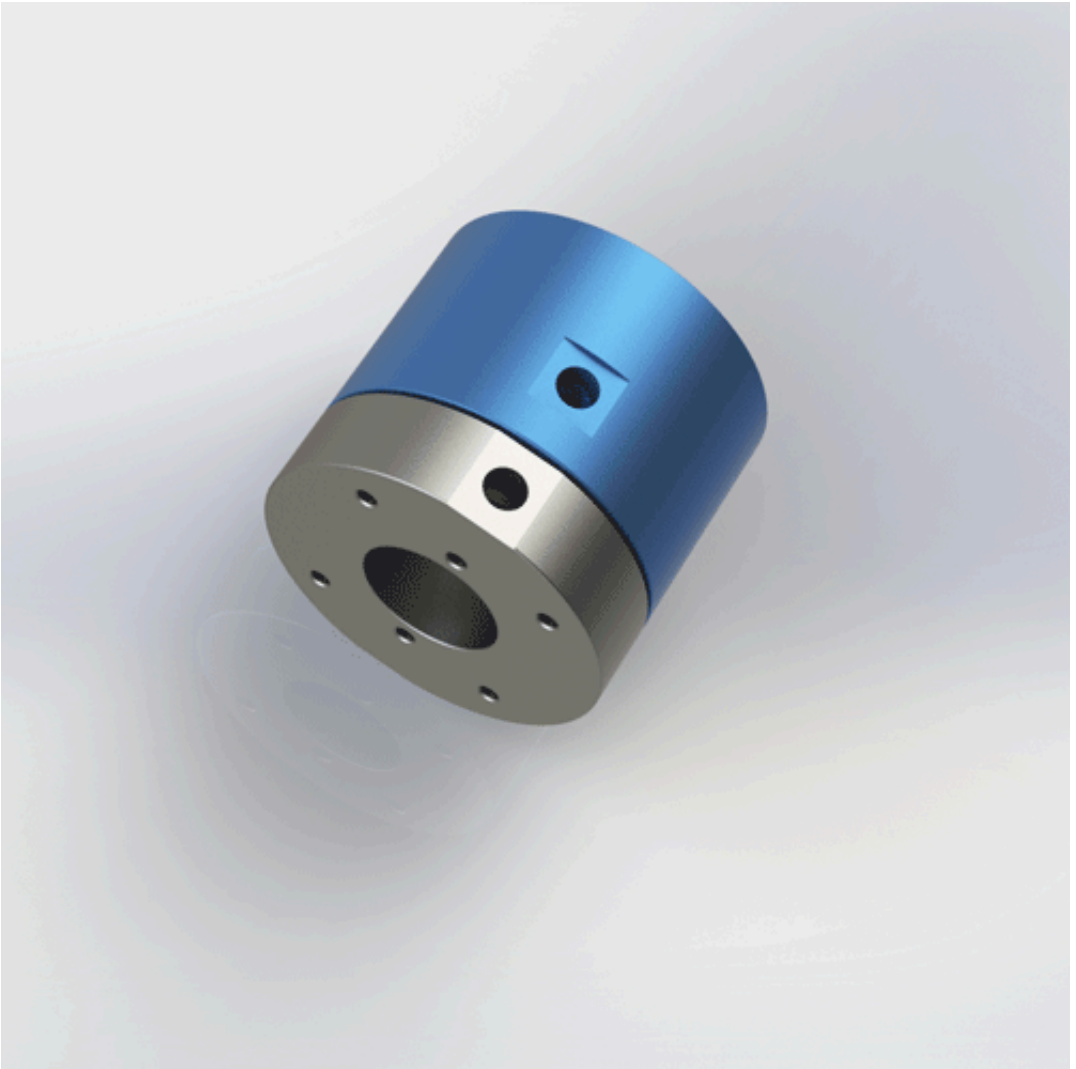

DIMENSIONAL REFERENCE

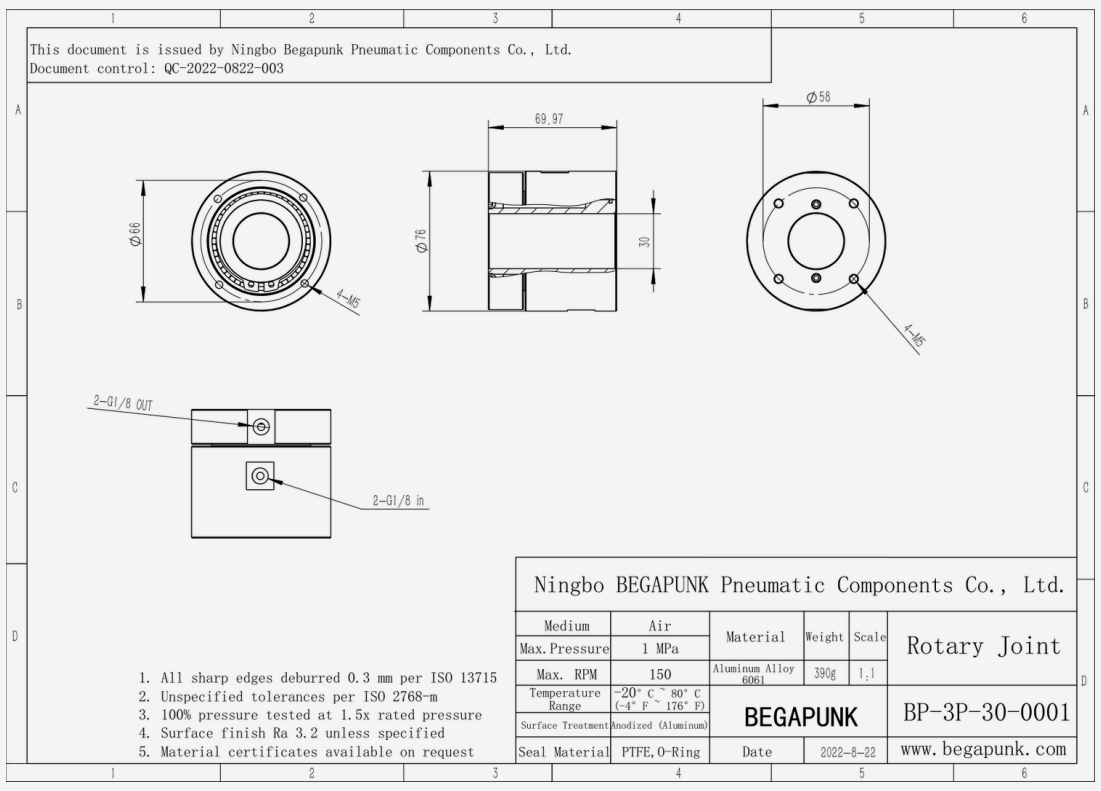


## PRODUCT OVERVIEW

The BP-2P-30-0001 is configured as 2-in-2-out (dual passage). The drawing specifies 4 x m5 mounting holes at each end. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2-in-2-out (dual passage)
- 4 x M5 mounting holes at each end
- 2 x G1/8 inlets; 2 x G1/8 outlets
- Dia. 30 mm

| | |
|---|---|
| **Configuration** | 2-in-2-out (dual passage) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 150 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 4 x M5 mounting holes at each end |
| **Ports / threads** | 2 x G1/8 inlets; 2 x G1/8 outlets |
| **Body material** | Aluminum Alloy 6061 |
| **Drawing weight** | 0.39 kg |
| **Drawing medium** | Air |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

**MODEL**

# BP-2P-50-0001

2-in-2-out Rotary Joint

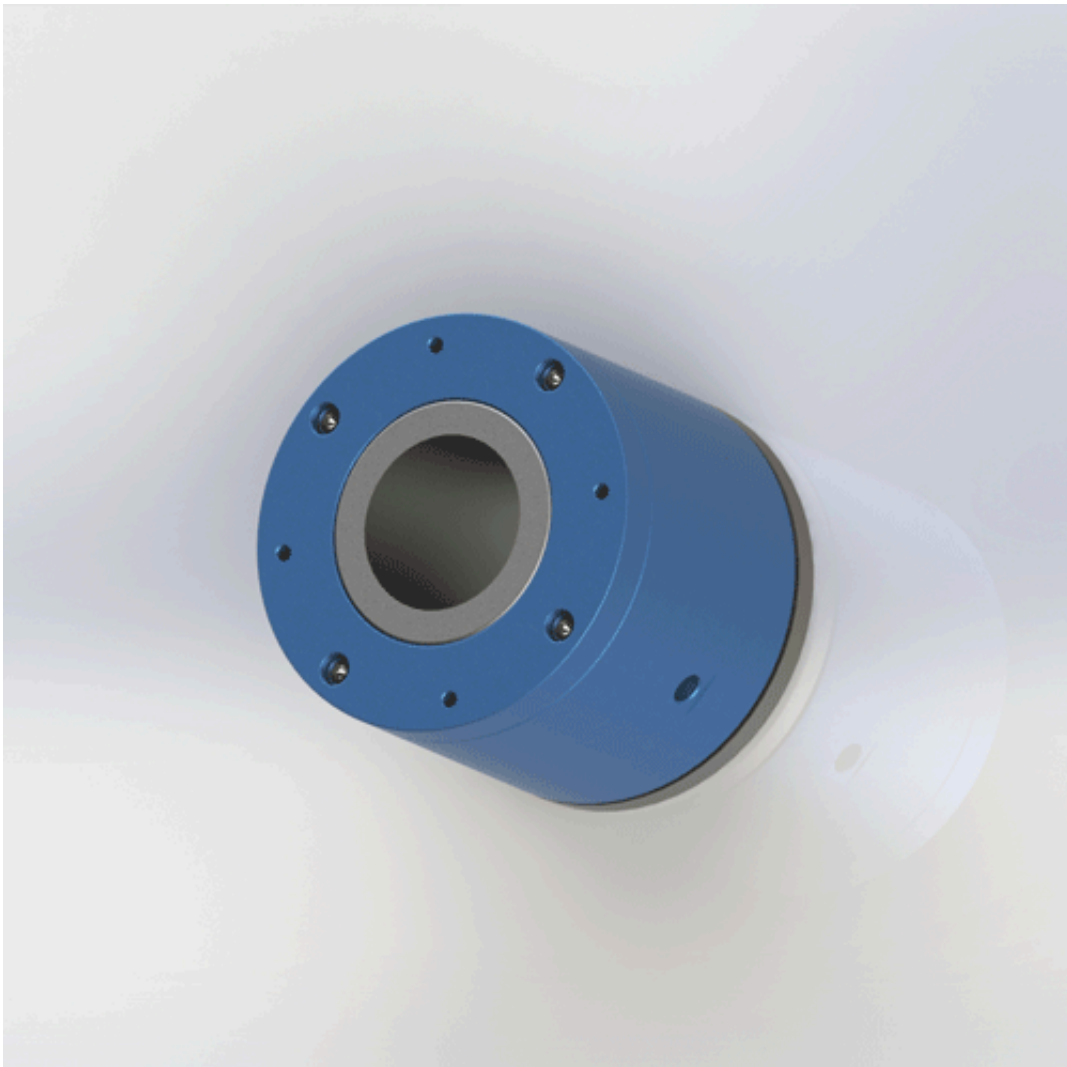

DIMENSIONAL REFERENCE

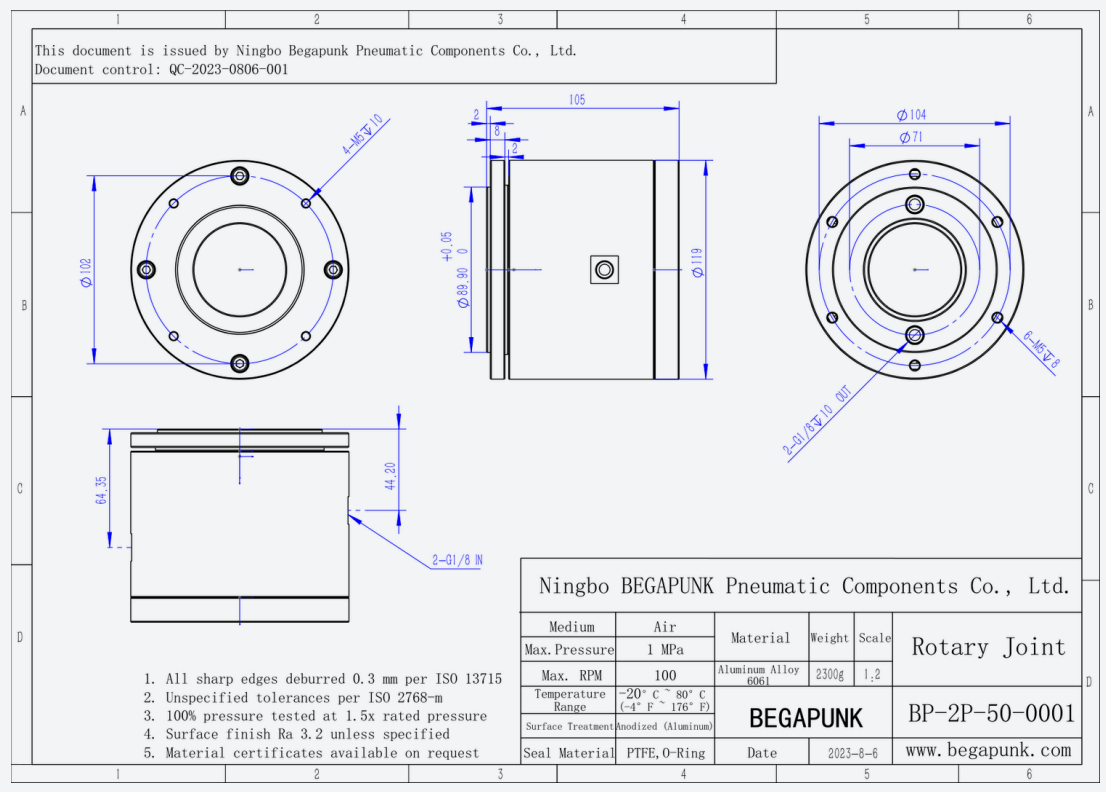


## PRODUCT OVERVIEW

The BP-2P-50-0001 is configured as 2-in-2-out (dual passage). The drawing specifies 4 x m5 stator mount, depth 10 mm; 6 x m5 rotor mount, depth 8 mm. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2-in-2-out (dual passage)
- 4 x M5 stator mount, depth 10 mm; 6 x M5 rotor mount, depth 8 mm
- 2 x G1/8 inlets; 2 x G1/8 outlets

| | |
|---|---|
| **Configuration** | 2-in-2-out (dual passage) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 100 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 4 x M5 stator mount, depth 10 mm; 6 x M5 rotor mount, depth 8 mm |
| **Ports / threads** | 2 x G1/8 inlets; 2 x G1/8 outlets |
| **Body material** | Aluminum Alloy 6061 |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 2.3 kg |
| **Drawing medium** | Air |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-2P-95-0001

2-in-4-out Rotary Joint

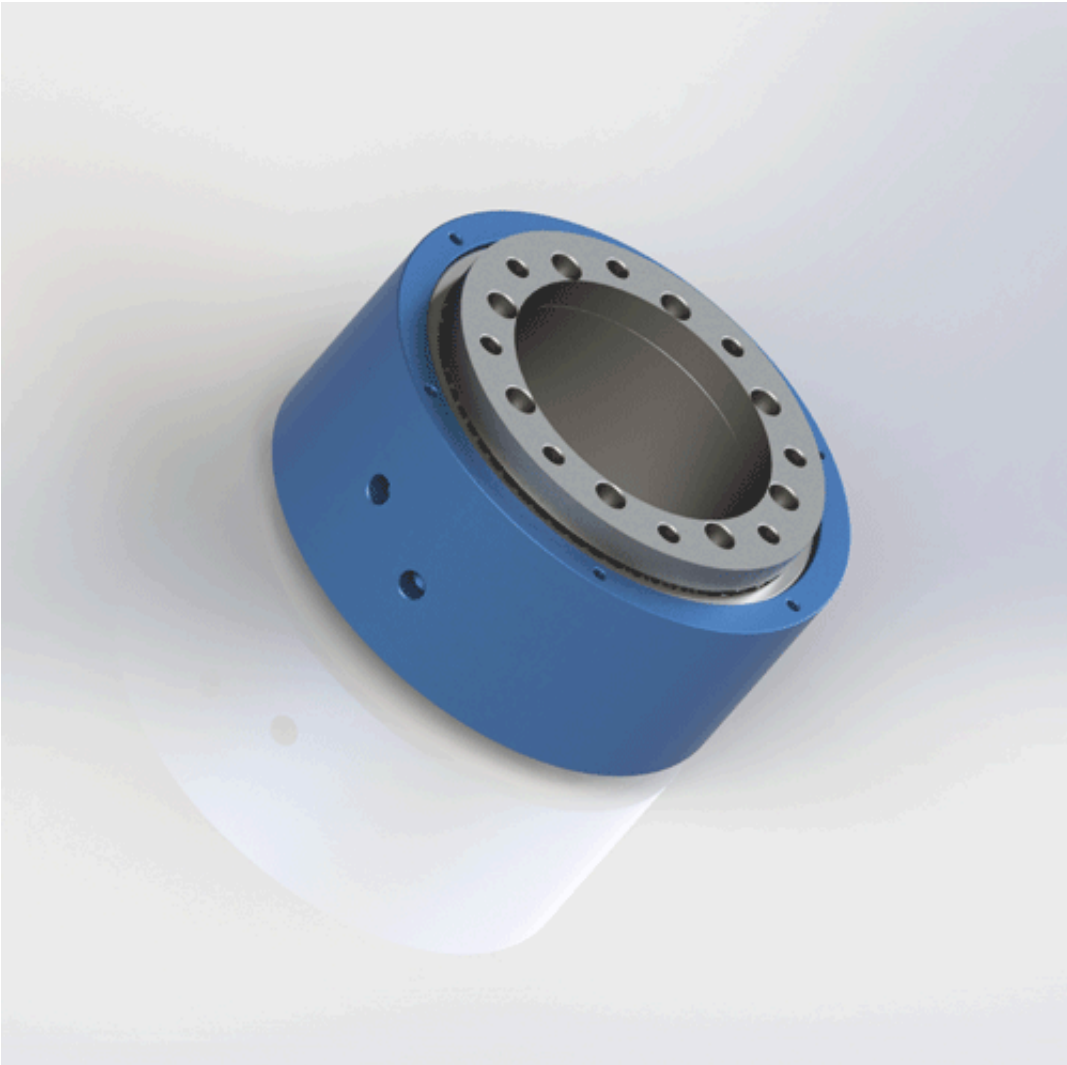

DIMENSIONAL REFERENCE

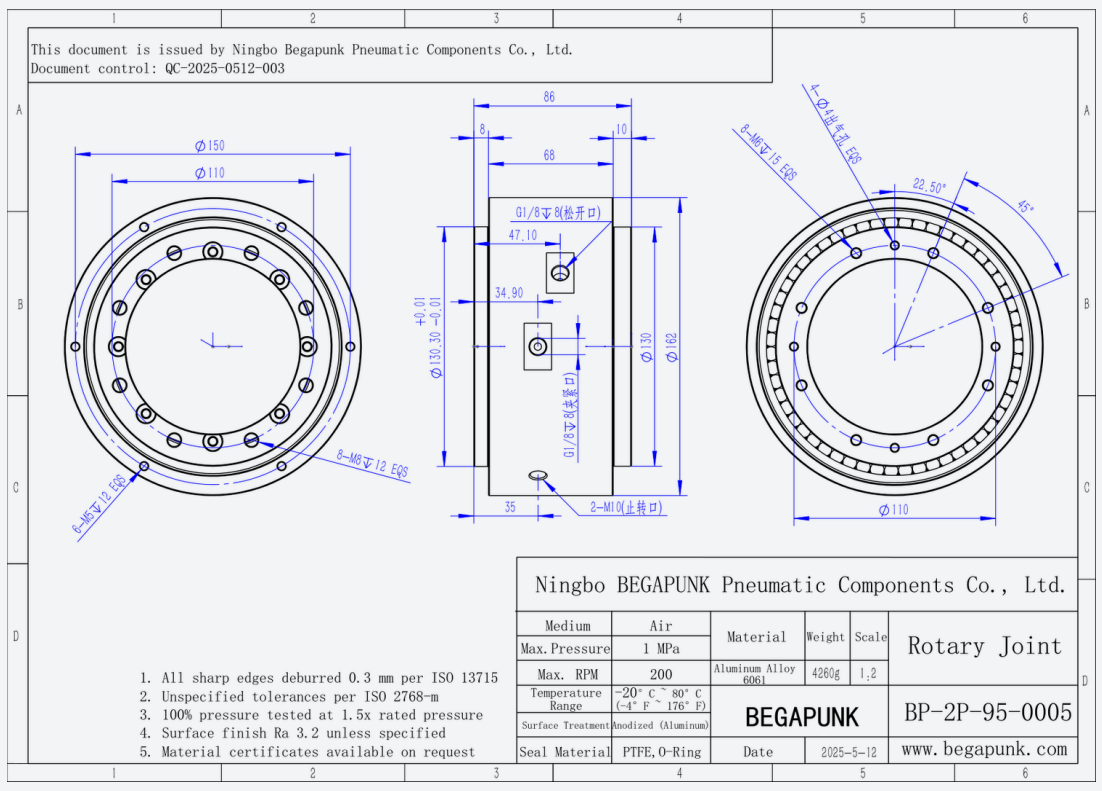


## PRODUCT OVERVIEW

The BP-2P-95-0001 is configured as 2-in-4-out (2 inlets, 4 outlets). The drawing specifies 6 x m5 and 8 x m8 mounting holes, depth 12 mm. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 2-in-4-out (2 inlets, 4 outlets)
- 6 x M5 and 8 x M8 mounting holes, depth 12 mm
- G1/8 ports; 2 x M10 anti-rotation ports

| | |
|---|---|
| **Configuration** | 2-in-4-out (2 inlets, 4 outlets) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 200 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 6 x M5 and 8 x M8 mounting holes, depth 12 mm |
| **Ports / threads** | G1/8 ports; 2 x M10 anti-rotation ports |
| **Body material** | Aluminum Alloy 6061 |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 4.26 kg |
| **Drawing medium** | Air |

View Product Online    Download 2D Drawing    Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-3P-0004

3-in-3-out Rotary Joint

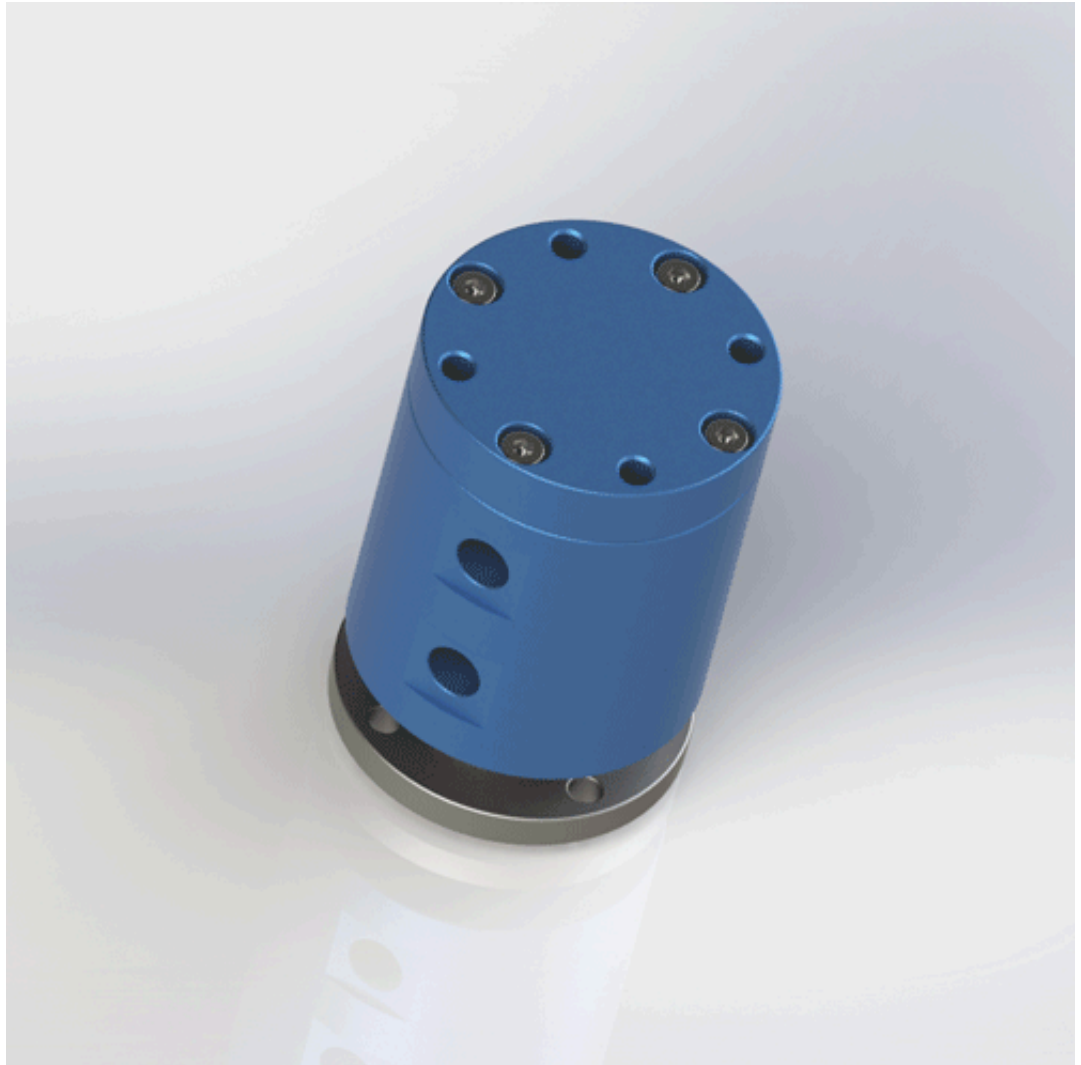

DIMENSIONAL REFERENCE

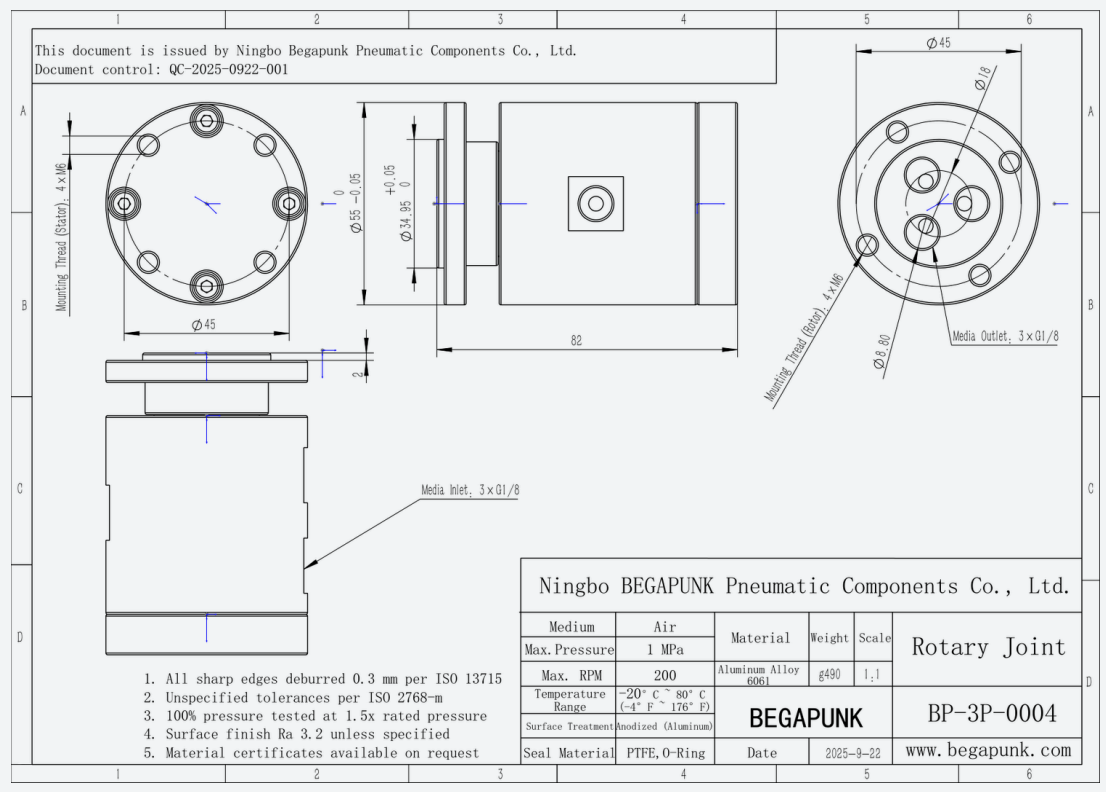


## PRODUCT OVERVIEW

The BP-3P-0004 is configured as 3-in-3-out (triple passage). The drawing specifies 4 x m6 stator mount; 4 x m6 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 3-in-3-out (triple passage)
- 4 x M6 stator mount; 4 x M6 rotor mount
- 3 x G1/8 inlets; 3 x G1/8 outlets

| | |
|---|---|
| Configuration | 3-in-3-out (triple passage) |
| Maximum pressure | 1 MPa / 10 bar |
| Maximum speed | 200 rpm |
| Temperature range | -20 to 80 deg C |
| Mounting | 4 x M6 stator mount; 4 x M6 rotor mount |
| Ports / threads | 3 x G1/8 inlets; 3 x G1/8 outlets |
| Body material | Aluminum Alloy 6061 |
| Seal | PTFE, O-Ring |
| Drawing weight | 0.49 kg |
| Drawing medium | Air |

View Product Online Download 2D Drawing Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-3P-0006

3-in-3-out (G1/4) Rotary Joint

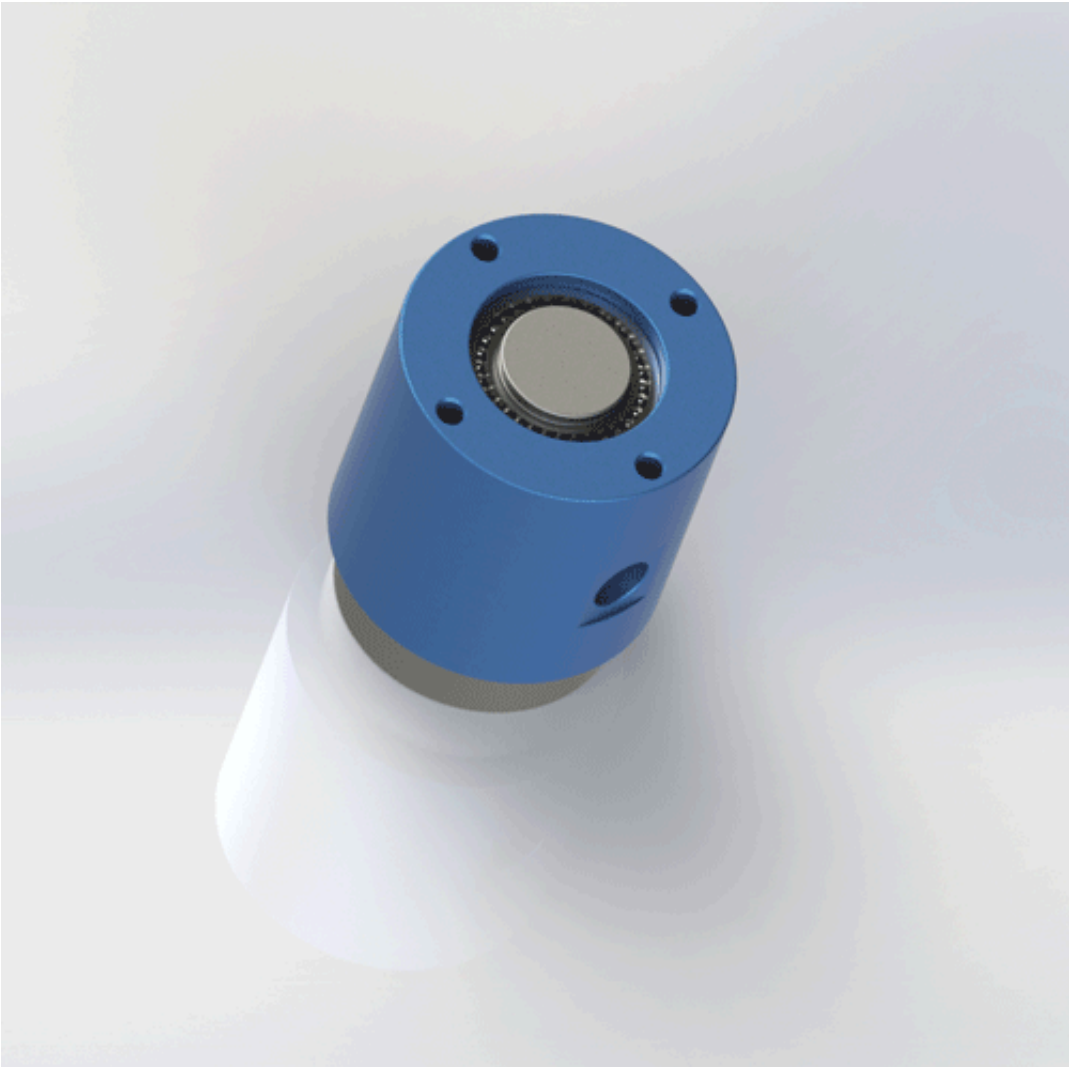

DIMENSIONAL REFERENCE

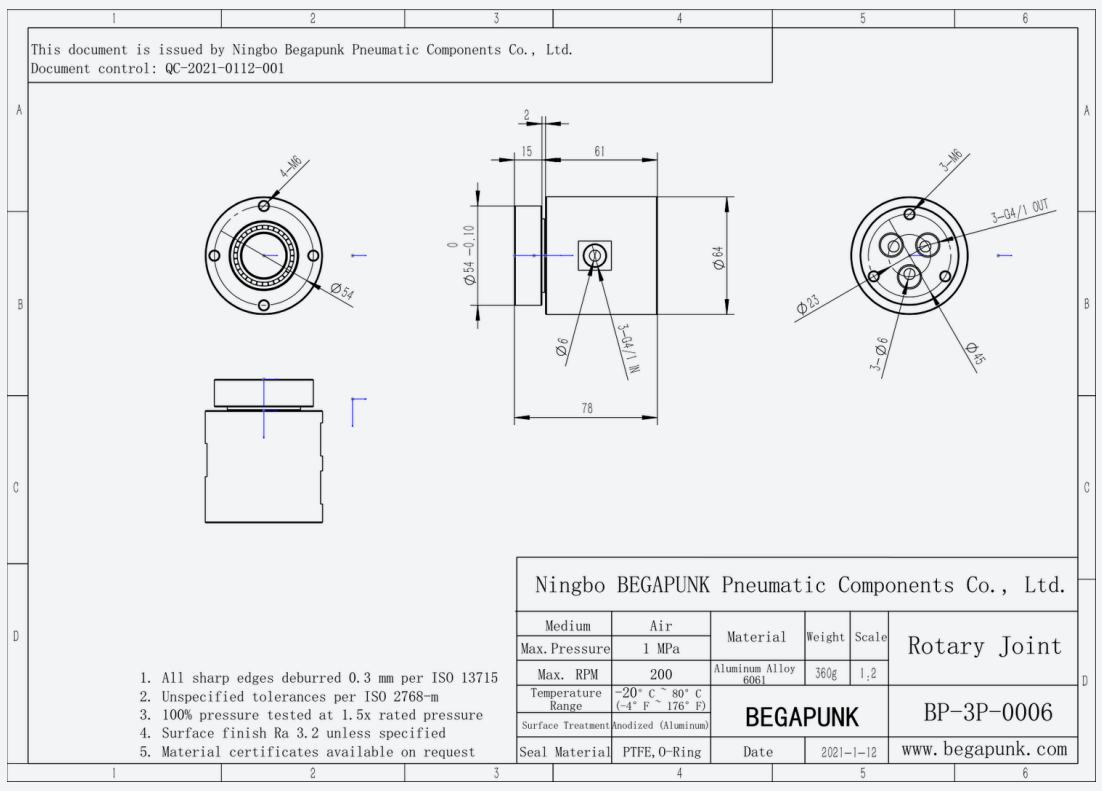


## PRODUCT OVERVIEW

The BP-3P-0006 is configured as 3-in-3-out (triple passage). The drawing specifies 4 x m6 stator mount; 3 x m6 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 3-in-3-out (triple passage)
- 4 x M6 stator mount; 3 x M6 rotor mount
- 3 x G1/4 inlets; 3 x G1/4 outlets

| | |
|---|---|
| **Configuration** | 3-in-3-out (triple passage) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 200 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 4 x M6 stator mount; 3 x M6 rotor mount |
| **Ports / threads** | 3 x G1/4 inlets; 3 x G1/4 outlets |
| **Body material** | Aluminum Alloy 6061 |
| **Drawing weight** | 0.36 kg |
| **Drawing medium** | Air |

View Product Online    Download 2D Drawing    Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

**MODEL**

# BP-3P-0007

3-in-3-out (4mm) Rotary Joint

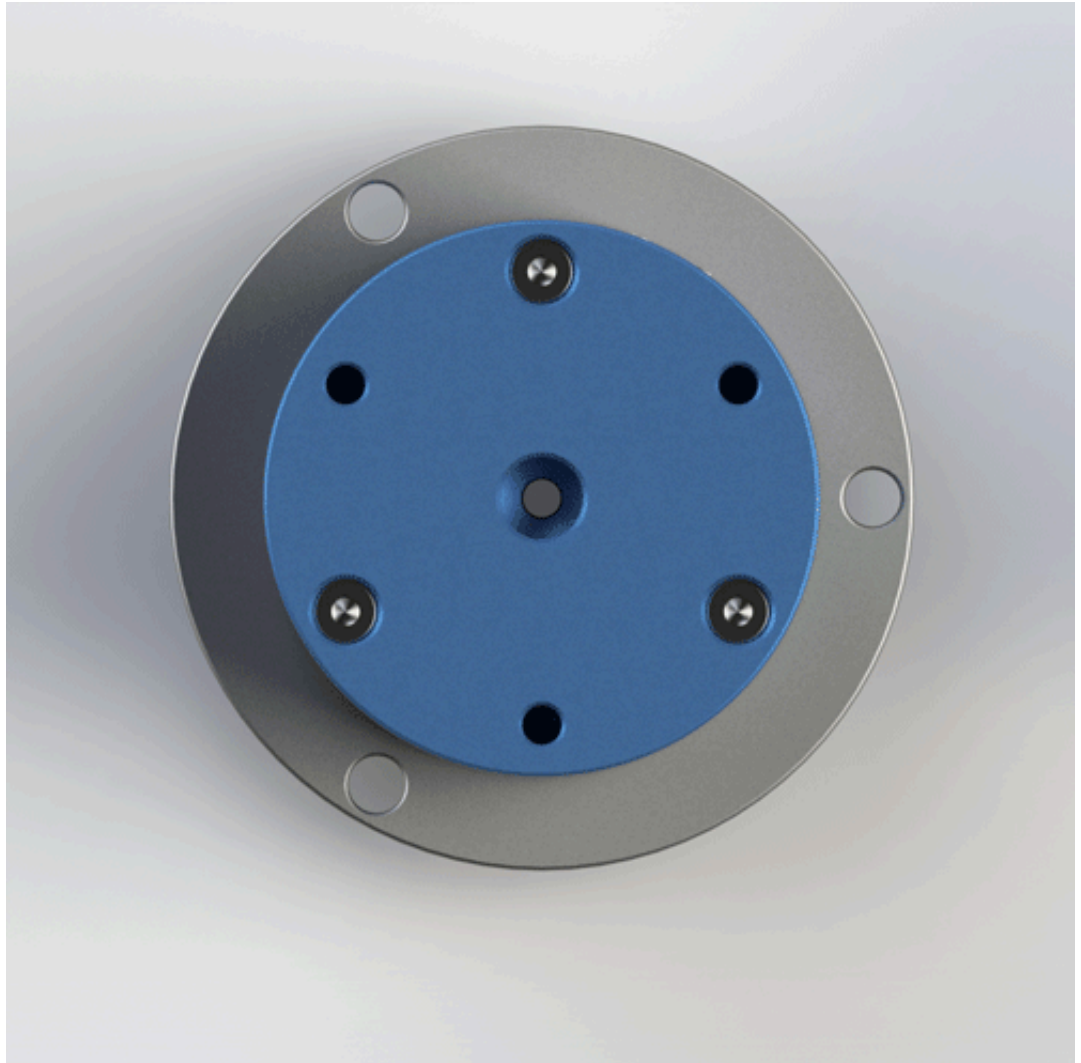

DIMENSIONAL REFERENCE

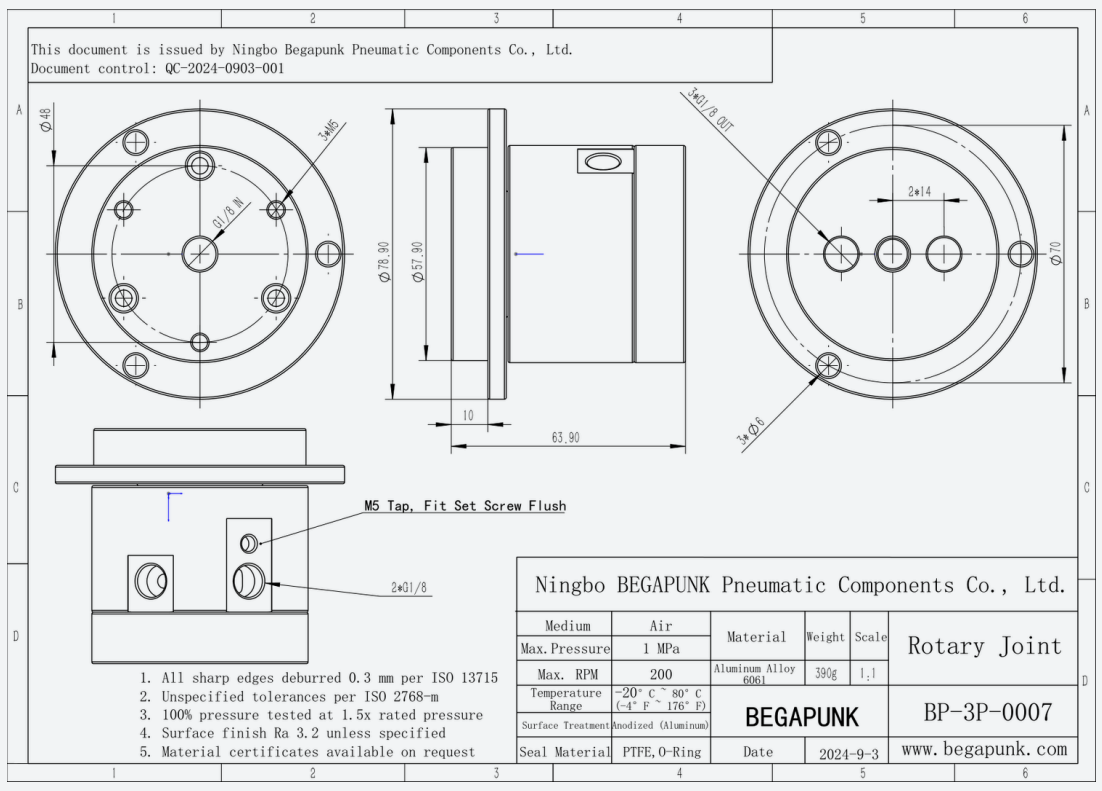


## PRODUCT OVERVIEW

The BP-3P-0007 is configured as 3-in-3-out (triple passage). The drawing specifies 3 x m5 and 3 x 6 mm mounting holes. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 3-in-3-out (triple passage)
- 3 x M5 and 3 x 6 mm mounting holes
- G1/8 ports; see drawing

| | |
|---|---|
| Configuration | 3-in-3-out (triple passage) |
| Maximum pressure | 1 MPa / 10 bar |
| Maximum speed | 200 rpm |
| Temperature range | -20 to 80 deg C |
| Mounting | 3 x M5 and 3 x 6 mm mounting holes |
| Ports / threads | G1/8 ports; see drawing |
| Body material | Aluminum Alloy 6061 |
| Seal | PTFE, O-Ring |
| Drawing weight | 0.39 kg |
| Drawing medium | Air |

**View Product Online** **Download 2D Drawing** **Request a Quotation**

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-3P-S06-0001

3-in-3-out + 6-Circuit Pneumatic-Electric Rotary Joint

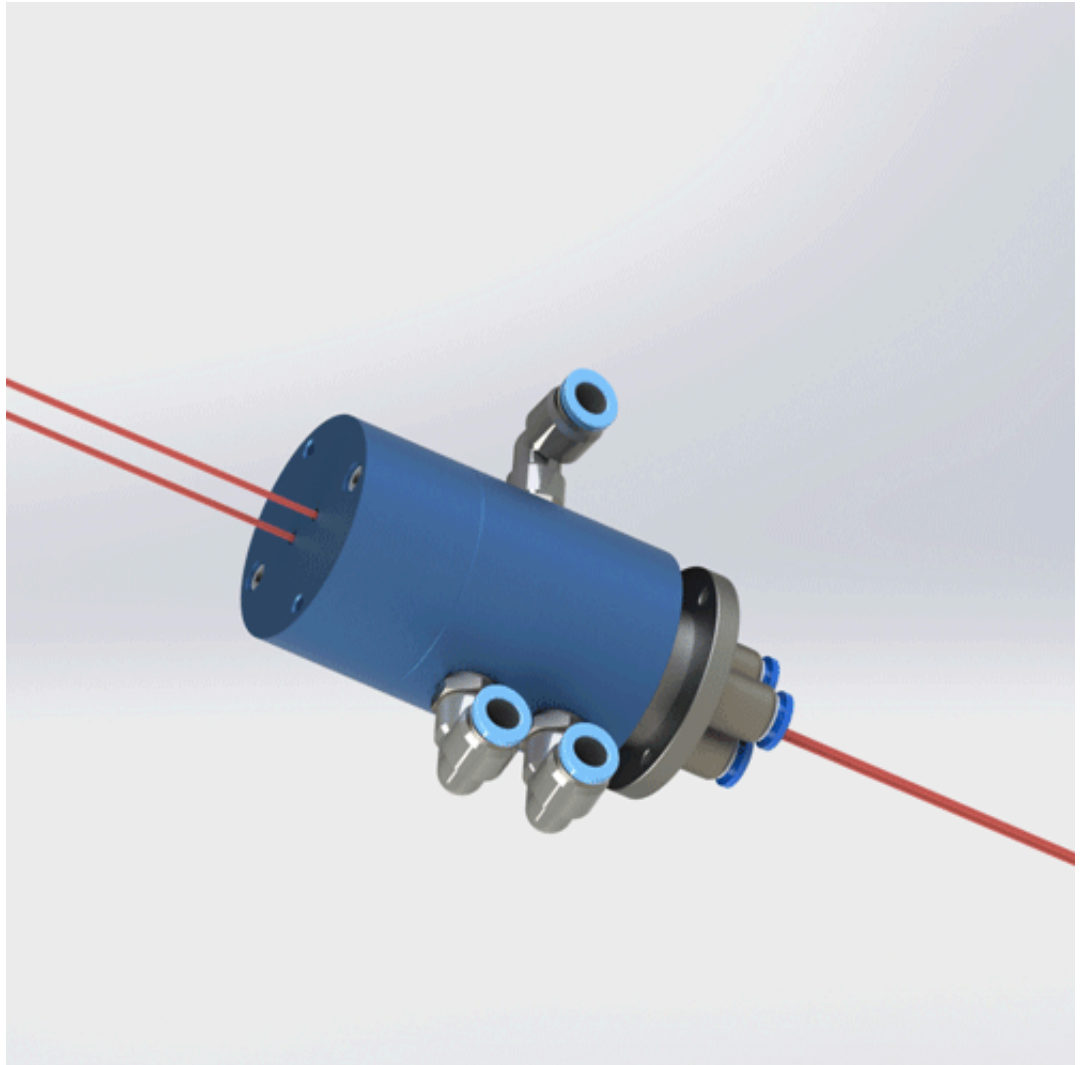

DIMENSIONAL REFERENCE

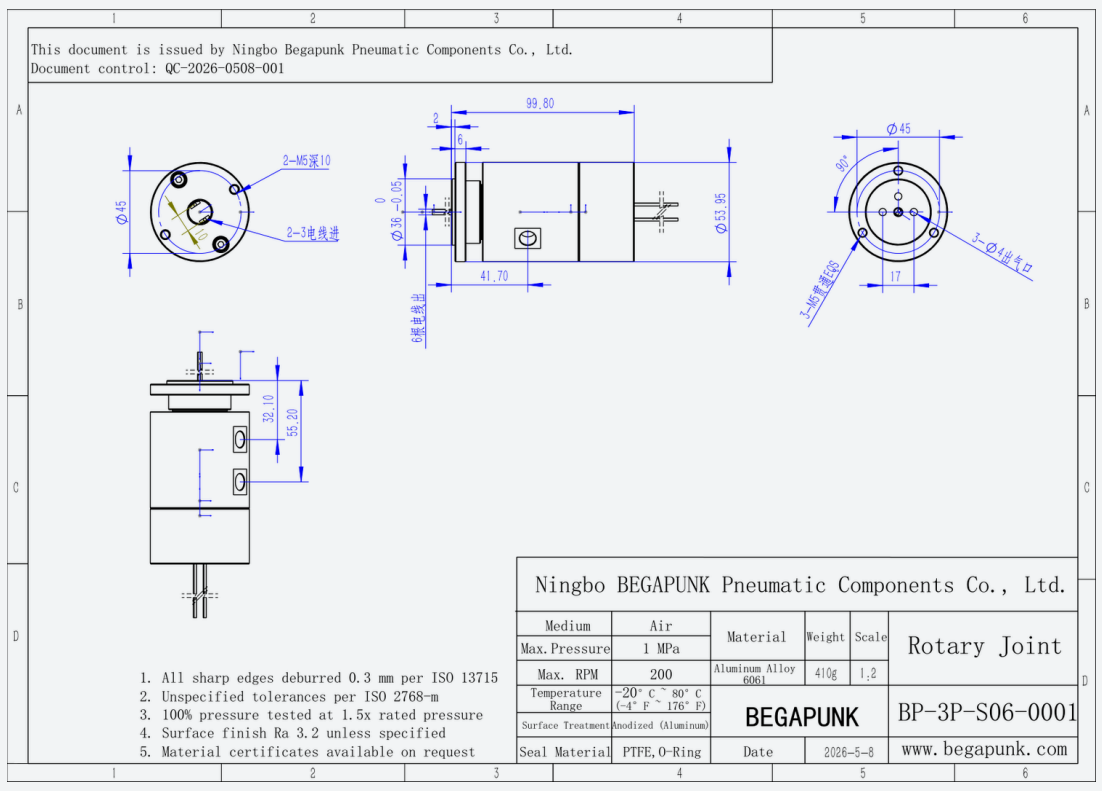


## PRODUCT OVERVIEW

The BP-3P-S06-0001 is configured as 3-in-3-out (triple passage). The drawing specifies 2 x m5, depth 10 mm; 3 x m5, depth 8 mm. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 3-in-3-out (triple passage)
- 2 x M5, depth 10 mm; 3 x M5, depth 8 mm
- Pneumatic ports per drawing
- 6 circuits (2A max per circuit)

| | |
|---|---|
| Configuration | 3-in-3-out (triple passage) |
| Maximum pressure | 1 MPa / 10 bar |
| Maximum speed | 200 rpm |
| Temperature range | -20 to 80 deg C |
| Mounting | 2 x M5, depth 10 mm; 3 x M5, depth 8 mm |
| Ports / threads | Pneumatic ports per drawing |
| Body material | Aluminum Alloy 6061 |
| Drawing weight | 0.41 kg |
| Drawing medium | Air |

View Product Online     Download 2D Drawing     Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-4P-30-0001

4-in-4-out (Dia. 30mm Bore) Rotary Joint

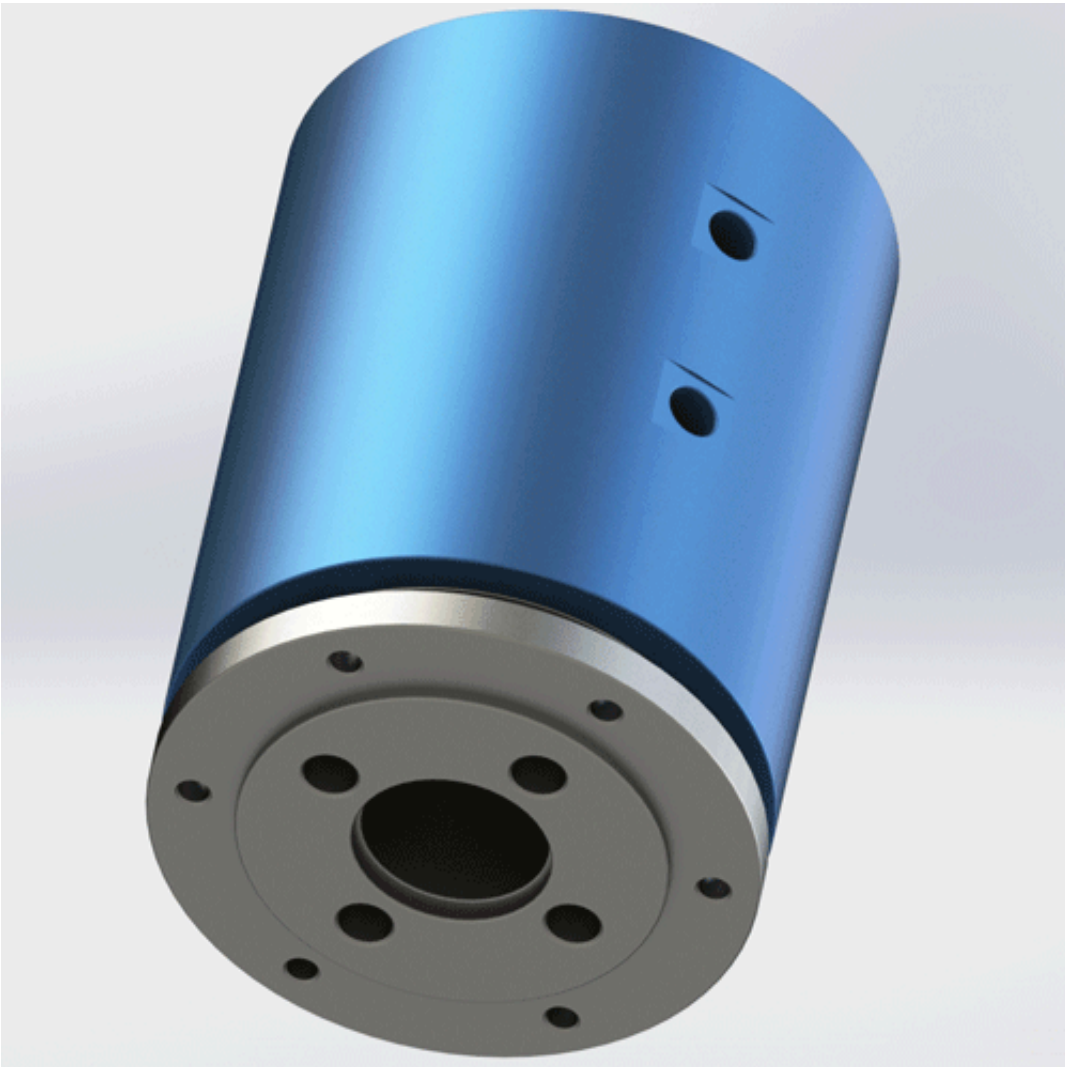

DIMENSIONAL REFERENCE

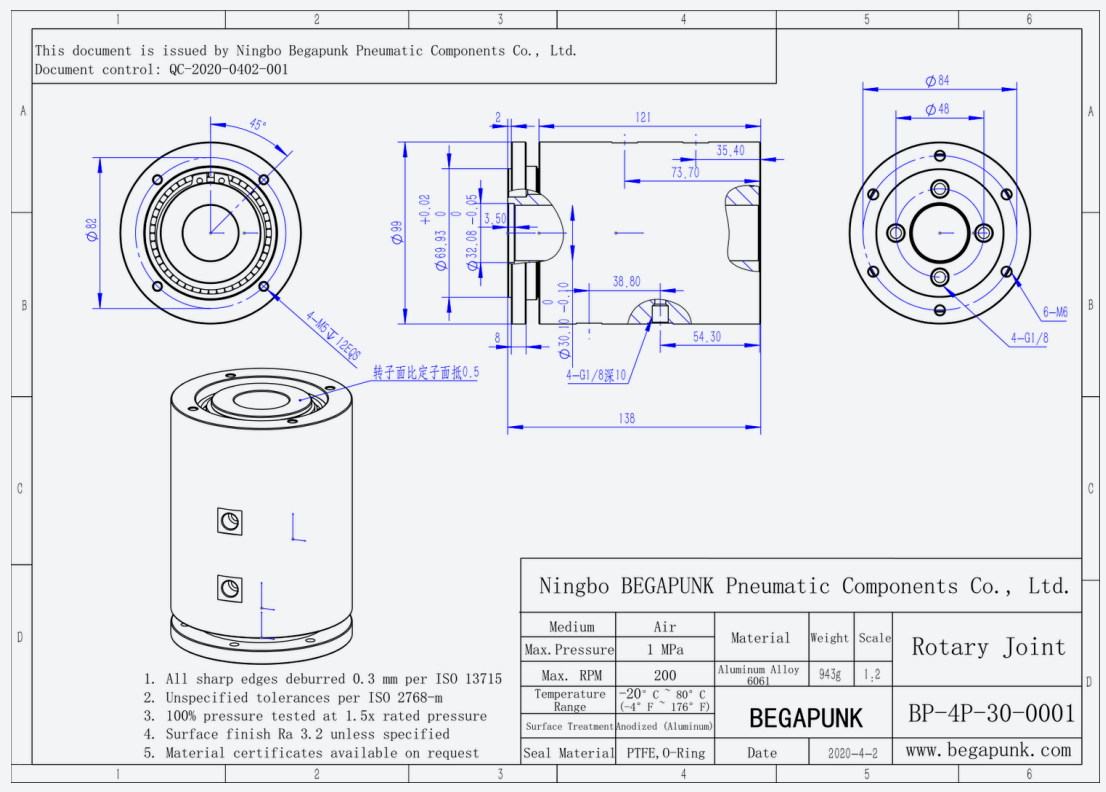


## PRODUCT OVERVIEW

The BP-4P-30-0001 is configured as 4-in-4-out (quad passage, Dia. 30mm hollow bore). The drawing specifies 4 x m5 stator mount, depth 12 mm; 6 x m6 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 4-in-4-out (quad passage, Dia. 30mm hollow bore)
- 4 x M5 stator mount, depth 12 mm; 6 x M6 rotor mount
- 4 x G1/8 ports, depth 10 mm

| | |
|---|---|
| **Configuration** | 4-in-4-out (quad passage, Dia. 30mm hollow bore) |
| **Maximum pressure** | 1 MPa / 10 bar |
| **Maximum speed** | 200 rpm |
| **Temperature range** | -20 to 80 deg C |
| **Mounting** | 4 x M5 stator mount, depth 12 mm; 6 x M6 rotor mount |
| **Ports / threads** | 4 x G1/8 ports, depth 10 mm |
| **Body material** | Aluminum Alloy 6061 |
| **Seal** | PTFE, O-Ring |
| **Drawing weight** | 0.943 kg |
| **Drawing medium** | Air |

View Product Online Download 2D Drawing Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

# BP-8P-0001

8-in-8-out Rotary Joint

DIMENSIONAL REFERENCE

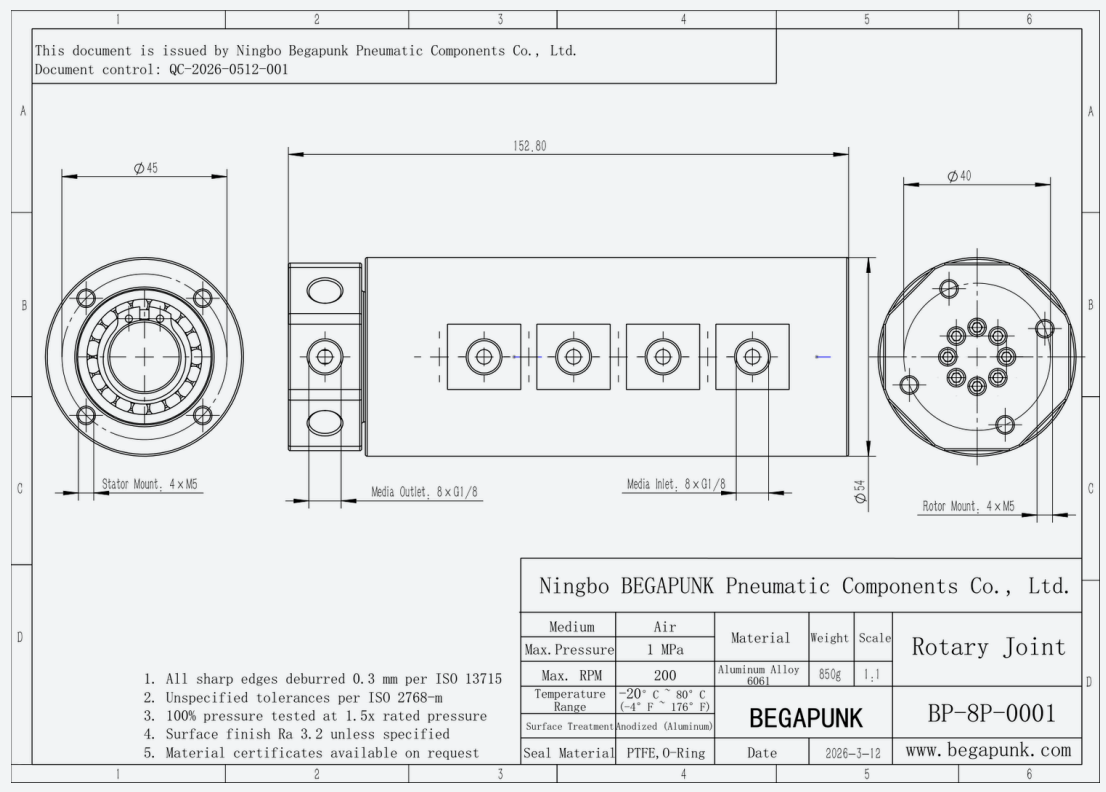


## PRODUCT OVERVIEW

The BP-8P-0001 is configured as 8-in-8-out (8 passages). The drawing specifies 4 x m5 stator mount; 4 x m5 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 8-in-8-out (8 passages)
- 4 x M5 stator mount; 4 x M5 rotor mount
- 8 x G1/8 inlets; 8 x G1/8 outlets

| | |
|---|---|
| Configuration | 8-in-8-out (8 passages) |
| Maximum pressure | 1 MPa / 10 bar |
| Maximum speed | 200 rpm |
| Temperature range | -20 to 80 deg C |
| Mounting | 4 x M5 stator mount; 4 x M5 rotor mount |
| Ports / threads | 8 x G1/8 inlets; 8 x G1/8 outlets |
| Body material | Aluminum Alloy 6061 |
| Seal | PTFE, O-Ring |
| Drawing weight | 0.85 kg |
| Drawing medium | Air |

View Product Online Download 2D Drawing Request a Quotation

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

APPLICATION-SPECIFIC

# Custom Rotary Joint Solutions

Begapunk can review customer requirements and develop a preliminary configuration for technical and commercial evaluation.

## Evaluation Inputs

| | |
|---|---|
| Number of passages | Working pressure and rotational speed |
| Pneumatic and fluid channel combinations | Temperature range |
| Special port threads | Material and seal configuration |
| Rotor and housing interfaces | Drain or leakage collection |
| Mounting flange dimensions | Electrical slip-ring integration requirements |
| Center through bore | Installation envelope |

## Review Process

**Customer Requirement**

V

**Engineering Review**

V

**Preliminary Configuration**

V

**Drawing Confirmation**

V

**Quotation**

V

**Prototype or Production**

**FEASIBILITY STATEMENT** Custom feasibility, performance limits and commercial terms are confirmed after engineering review.

RFQ CHECKLIST

# Information Required for Quotation

To recommend a suitable model or evaluate a custom rotary joint, please provide the following information.

**01 Medium**
Air, water, hydraulic oil, coolant, vacuum or other media.

**02 Passages**
Number of independent channels.

**03 Pressure**
Normal and maximum pressure for each passage.

**04 Speed**
Normal and maximum rpm.

**05 Temperature**
Minimum and maximum temperatures.

**06 Ports**
Thread type, tube diameter and direction.

**07 Flow**
Required flow rate or minimum internal bore.

**08 Mounting**
Available diameter, length, flange and shaft dimensions.

**09 Duty cycle**
Continuous, intermittent or indexing rotation.

**10 Runout**
Expected radial and axial runout where available.

**11 Leakage**
Acceptable level and collection requirement.

**12 Quantity**
Prototype, initial order and estimated annual demand.

**13 Reference**
Existing model, drawing, equipment photo or sample.

**14 Schedule**
Required sample date and production schedule.

SEND DRAWINGS AND OPERATING CONDITIONS TO

**sales@begapunk.com**

Requirement Submission > Engineering Review > Model Selection or Custom Evaluation > Drawing Confirmation > Quotation > Sample or Production

# Rotary Joint Solutions


## Ningbo Begapunk Pneumatic Components Co., Ltd.

**G. C. Cao**
Sales Engineer

| | |
|---|---|
| Mobile / WhatsApp | +86 18368425342 |
| Email | sales@begapunk.com |
| Website | www.begapunk.com |
| Address | No. 88, Yugong Road, Zonghan Industrial Zone,<br>Ningbo, Zhejiang, China 315301 |


Website

Contact / RFQ