
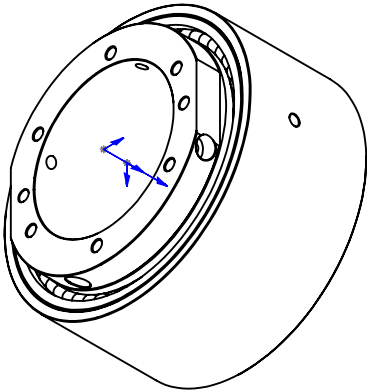
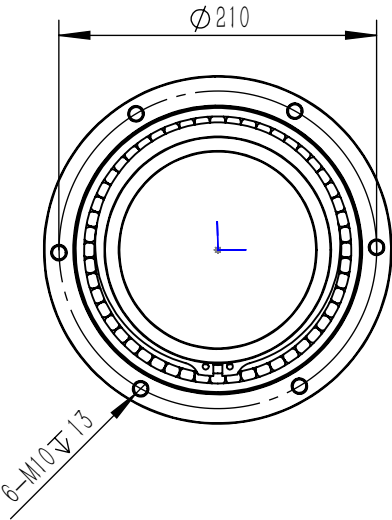
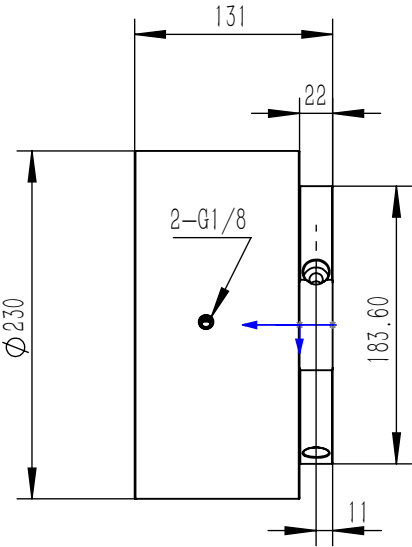


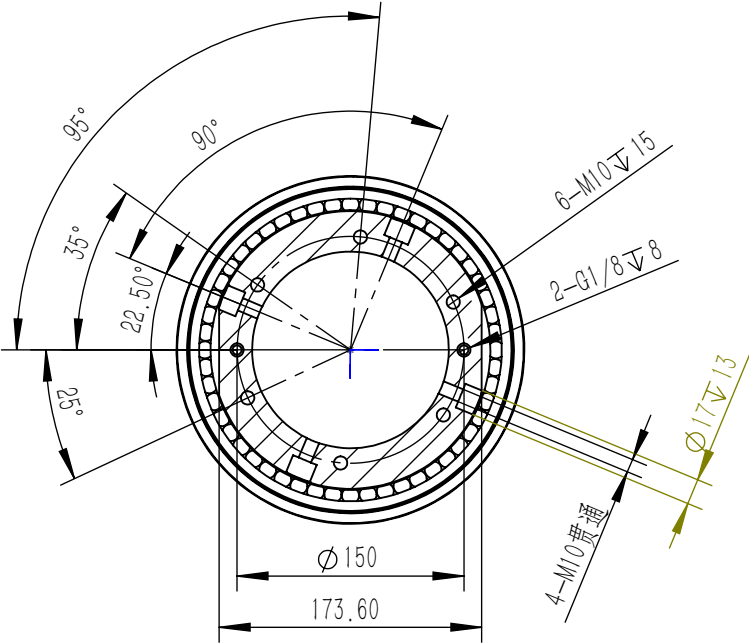

1. All sharp edges deburred 0.3 mm per ISO 13715
2. Unspecified tolerances per ISO 2768-m
3. 100% pressure tested at 1.5x rated pressure
4. Surface finish Ra 3.2 unless specified
5. Material certificates available on request

Ningbo BEGAPUNK Pneumatic Components Co., Ltd.						
Medium	Air	Material	Weight	Scale	Rotary Joint	
Max. Pressure	5 MPa					
Max. RPM	80	Aluminum Alloy 6061	8655g	1:5		
Temperature Range	-20° C ~ 80° C (-4° F ~ 176° F)	BEGAPUNK			BP-2P-130-0001	
Surface Treatment	Anodized (Aluminum)					
Seal Material	PTFE, O-Ring	Date	2024-3-10		www.begapunk.com	