
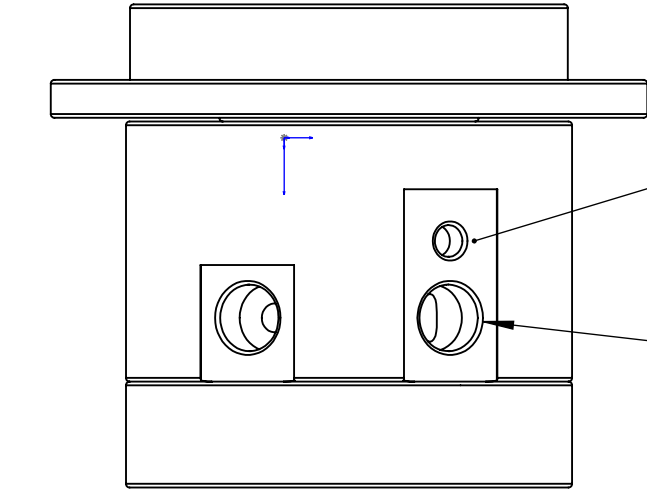


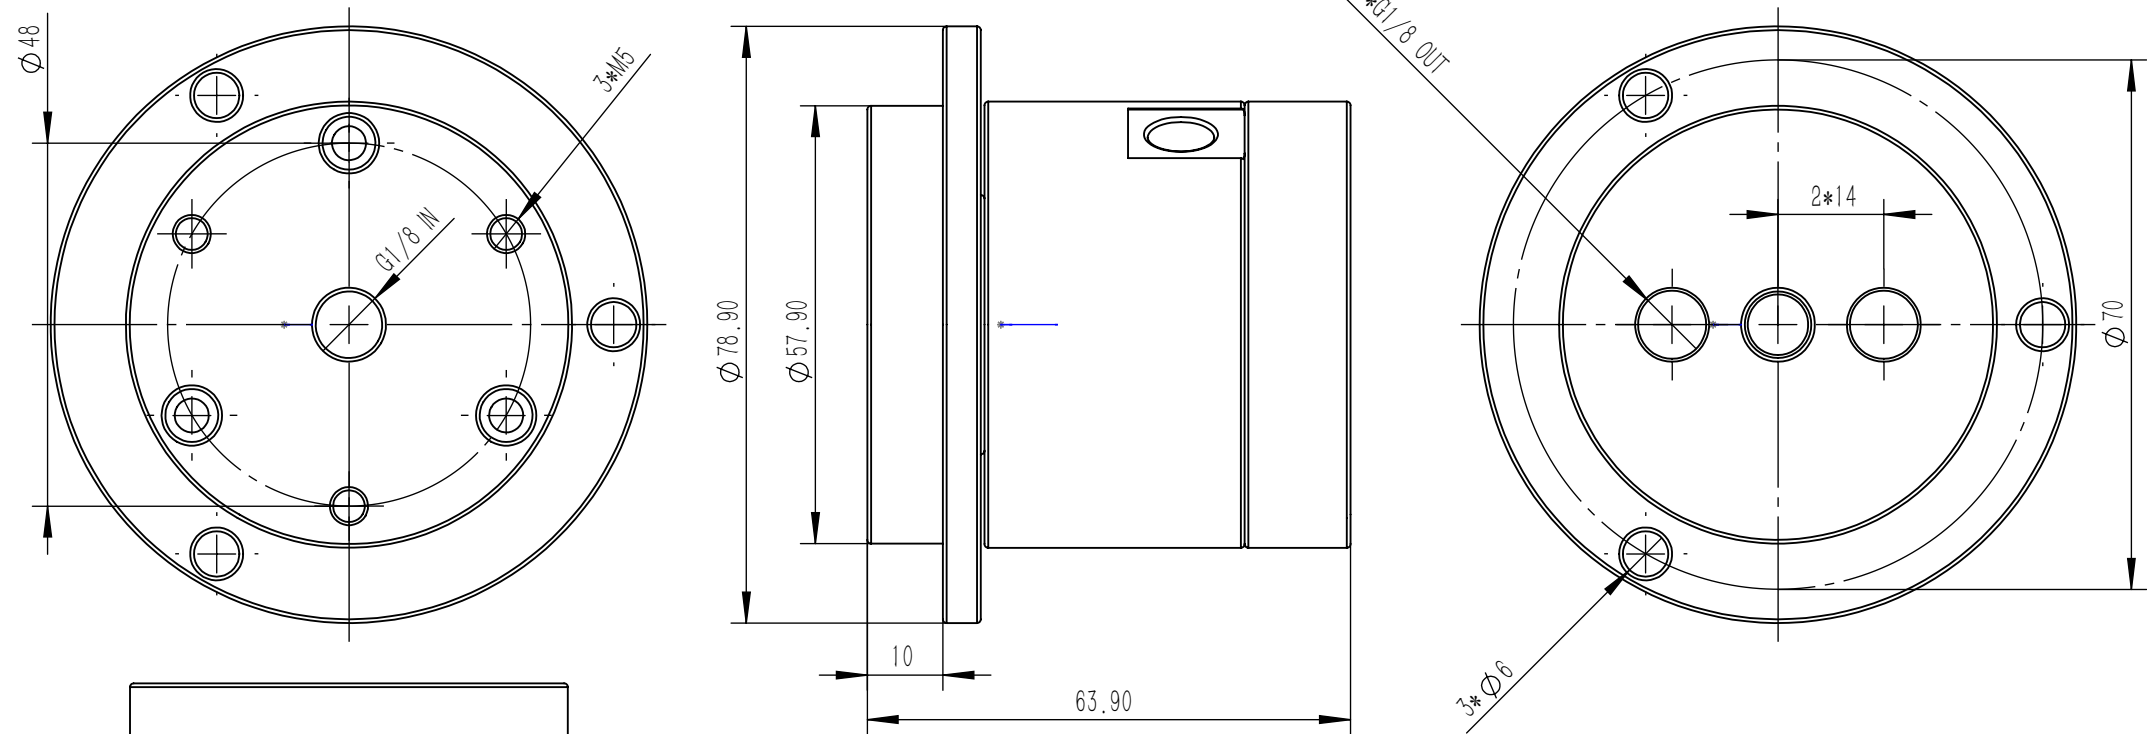

1. All sharp edges deburred 0.3 mm per ISO 13715
2. Unspecified tolerances per ISO 2768-m
3. 100% pressure tested at 1.5x rated pressure
4. Surface finish Ra 3.2 unless specified
5. Material certificates available on request

| Ningbo BEGAPUNK Pneumatic Components Co., Ltd. |                                    |                     |          |       |                  |  |
|------------------------------------------------|------------------------------------|---------------------|----------|-------|------------------|--|
| Medium                                         | Air                                | Material            | Weight   | Scale | Rotary Joint     |  |
| Max. Pressure                                  | 1 MPa                              |                     |          |       |                  |  |
| Max. RPM                                       | 200                                | Aluminum Alloy 6061 | 390g     | 1:1   |                  |  |
| Temperature Range                              | -20° C ~ 80° C<br>(-4° F ~ 176° F) | BEGAPUNK            |          |       | BP-3P-0007       |  |
| Surface Treatment                              | Anodized (Aluminum)                |                     |          |       |                  |  |
| Seal Material                                  | PTFE, O-Ring                       | Date                | 2024-9-3 |       | www.begapunk.com |  |