
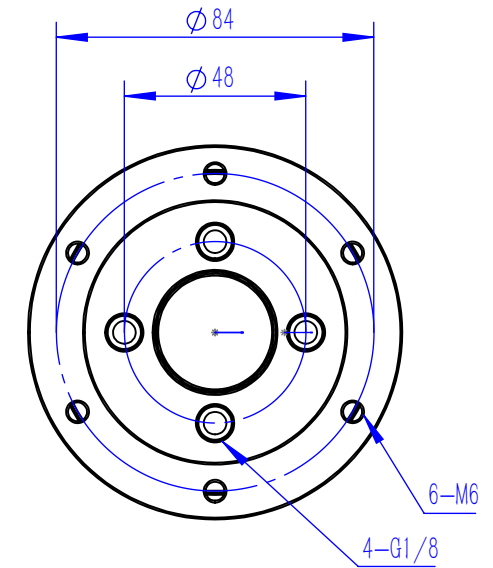
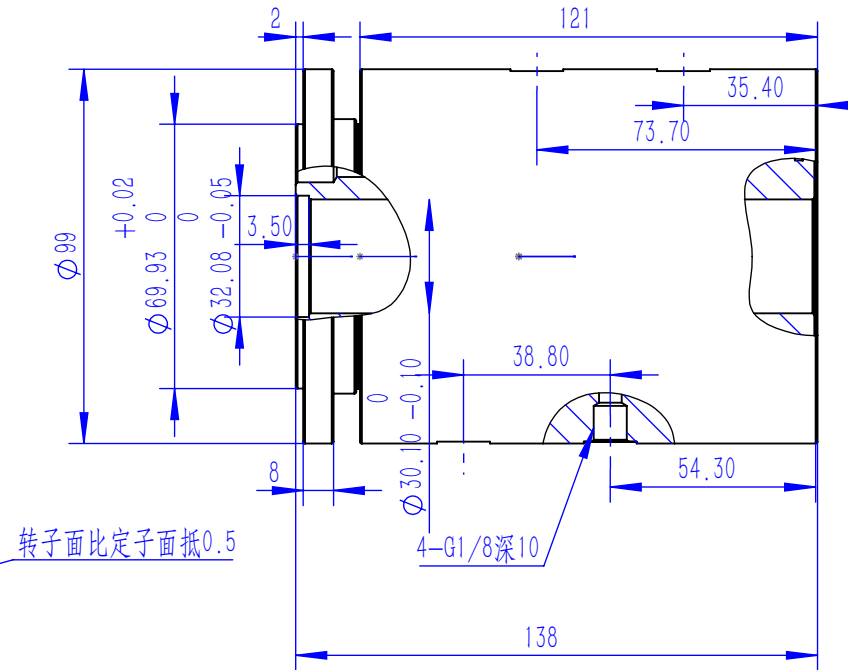
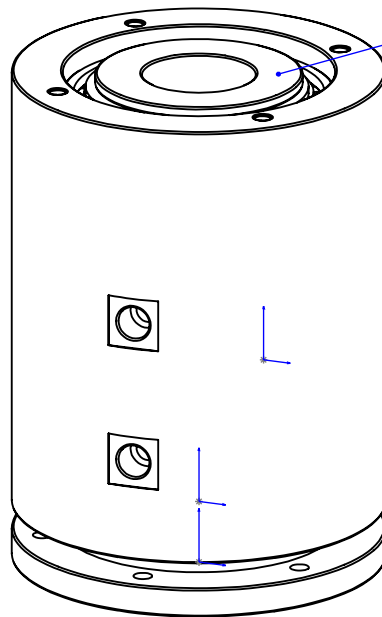


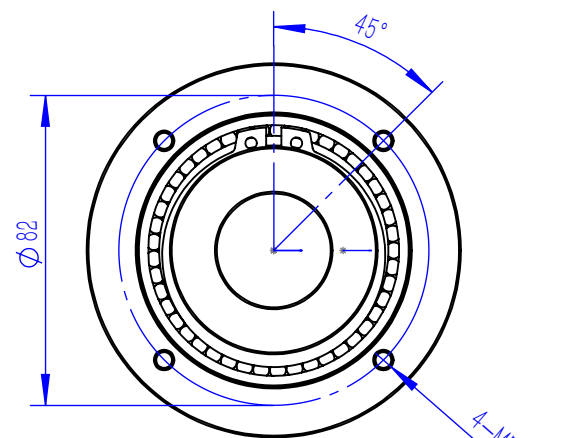

1. All sharp edges deburred 0.3 mm per ISO 13715
2. Unspecified tolerances per ISO 2768-m
3. 100% pressure tested at 1.5x rated pressure
4. Surface finish Ra 3.2 unless specified
5. Material certificates available on request

Ningbo BEGAPUNK Pneumatic Components Co., Ltd.

|                   |                                    |                     |          |                  |               |
|-------------------|------------------------------------|---------------------|----------|------------------|---------------|
| Medium            | Air                                | Material            | Weight   | Scale            | Rotary Joint  |
| Max. Pressure     | 1 MPa                              |                     |          |                  |               |
| Max. RPM          | 200                                | Aluminum Alloy 6061 | 943g     | 1:2              |               |
| Temperature Range | -20° C ~ 80° C<br>(-4° F ~ 176° F) | BEGAPUNK            |          |                  | BP-4P-30-0001 |
| Surface Treatment | Anodized (Aluminum)                |                     |          |                  |               |
| Seal Material     | PTFE, O-Ring                       | Date                | 2020-4-2 | www.begapunk.com |               |