


**INDUSTRIAL ROTARY INTERFACES**

# Rotary Joint Product Catalog

Pneumatic, Fluid and Custom Rotary Joint Solutions

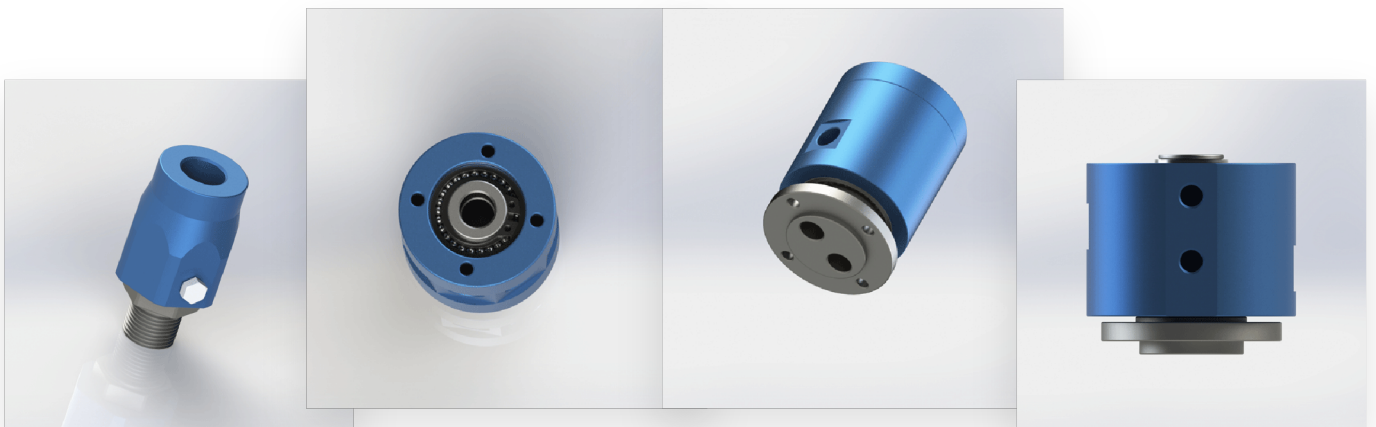

ABOUT

# About Begapunk

Ningbo Begapunk Pneumatic Components Co., Ltd. develops and supplies rotary joint solutions for pneumatic, fluid-transfer and customized rotating-interface applications.

Our product work focuses on model selection, interface configuration, installation compatibility and application-specific customization.

For applications that cannot be served by a standard model, customers may provide operating conditions, installation drawings or reference samples for engineering review.



[www.begapunk.com](http://www.begapunk.com)

[sales@begapunk.com](mailto:sales@begapunk.com)

|         |                                                |
|---------|------------------------------------------------|
| COMPANY | Ningbo Begapunk Pneumatic Components Co., Ltd. |
|---------|------------------------------------------------|

|          |               |
|----------|---------------|
| LOCATION | Ningbo, China |
|----------|---------------|

|               |                                   |
|---------------|-----------------------------------|
| PRODUCT FOCUS | Pneumatic and fluid rotary joints |
|---------------|-----------------------------------|

|                     |                                          |
|---------------------|------------------------------------------|
| ENGINEERING SUPPORT | Standard selection and custom evaluation |
|---------------------|------------------------------------------|

## ENGINEERING INPUTS

# How to Select a Rotary Joint

01

**Medium**

Air, water, oil, coolant or combined media.

02

**Number of Passages**

Confirm the number of independent flow channels.

03

**Working Pressure**

Provide normal and maximum pressure.

04

**Rotational Speed**

Provide continuous and maximum rpm.

05

**Port Size**

Confirm thread type, tube size and flow requirement.

06

**Mounting Method**

Confirm rotor and housing installation interfaces.

07

**Operating Temperature**

Provide minimum and maximum temperatures.

08

**Installation Envelope**

Provide diameter, length and surrounding clearance.

09

**Duty Cycle**

Continuous, indexing or intermittent rotation.

10

**Leakage Requirement**

State whether minor controlled leakage is acceptable.

## SELECTION NOTE

Rotational speed must not be evaluated independently. Seal diameter, pressure, medium, temperature, duty cycle and shaft runout can materially affect rotary-joint selection.

SHORTLIST

# Selected Rotary Joint Models

Page 1 of 2 | Confirm final limits against the approved drawing.

| Model          | Configuration                    | Pressure | Speed   | Mounting                                       |
|----------------|----------------------------------|----------|---------|------------------------------------------------|
| BP-1P-0003     | 1-in-1-out (single passage)      | 10 bar   | 500 rpm | Threaded connection                            |
| BP-1P-0006     | 1 inlet / 8 outlets              | 10 bar   | 300 rpm | 4 x M4 mounting holes at each end              |
| BP-2P-0001     | 2-in-2-out (dual passage)        | 10 bar   | 200 rpm | 4 x M5 rotor mount; 4 x M5 anti-rotation mount |
| BP-2P-0002     | 2-in-3-out (2 inlets, 3 outlets) | 10 bar   | 300 rpm | M5, M6 and M8 mounting features; see drawing   |
| BP-2P-08-0001  | 2 Passages (2-in-2-out)          | 10 bar   | 200 rpm | 4 x M4, depth 10 mm                            |
| BP-2P-130-0001 | 2-in-2-out (dual passage)        | 50 bar   | 80 rpm  | M10 mounting features; see drawing             |
| BP-2P-16-0001  | 2-in-2-out (16mm Bore)           | 10 bar   | 200 rpm | 4 x M5 stator mount; 4 x M5 rotor mount        |
| BP-2P-30-0001  | 2-in-2-out (dual passage)        | 10 bar   | 150 rpm | 4 x M5 mounting holes at each end              |

**Pressure** Maximum drawing value

**Speed** Maximum drawing value

**Contact us** Source confirmation required

SHORTLIST

# Selected Rotary Joint Models

Page 2 of 2 | Confirm final limits against the approved drawing.

| Model          | Configuration                                       | Pressure | Speed   | Mounting                                                            |
|----------------|-----------------------------------------------------|----------|---------|---------------------------------------------------------------------|
| BP-2P-50-0001  | 2-in-2-out (dual passage)                           | 10 bar   | 100 rpm | 4 x M5 stator mount, depth 10 mm;<br>6 x M5 rotor mount, depth 8 mm |
| BP-2P-95-0005  | 2-in-4-out (2 inlets, 4 outlets)                    | 10 bar   | 200 rpm | 6 x M5 and 8 x M8 mounting holes,<br>depth 12 mm                    |
| BP-3P-0004     | 3-in-3-out (triple passage)                         | 10 bar   | 200 rpm | 4 x M6 stator mount; 4 x M6 rotor<br>mount                          |
| BP-3P-0006     | 3-in-3-out (triple passage)                         | 10 bar   | 200 rpm | 4 x M6 stator mount; 3 x M6 rotor<br>mount                          |
| BP-3P-0007     | 3-in-3-out (triple passage)                         | 10 bar   | 200 rpm | 3 x M5 and 3 x 6 mm mounting<br>holes                               |
| BP-3P-S06-0001 | 3 pneumatic passages<br>+ 6 electrical leads        | 10 bar   | 200 rpm | 2 x M5, depth 10 mm; 3 x M5, depth<br>8 mm                          |
| BP-4P-30-0001  | 4-in-4-out (quad passage, Dia.<br>30mm hollow bore) | 10 bar   | 200 rpm | 4 x M5 stator mount, depth 12 mm;<br>6 x M6 rotor mount             |
| BP-8P-0001     | 8-in-8-out (8 passages)                             | 10 bar   | 200 rpm | 4 x M5 stator mount; 4 x M5 rotor<br>mount                          |

Pressure Maximum drawing value


Speed Maximum drawing value

Contact us Source confirmation required


MODEL

BP-1P-0003

- 1-in-1-out Rotary Joint

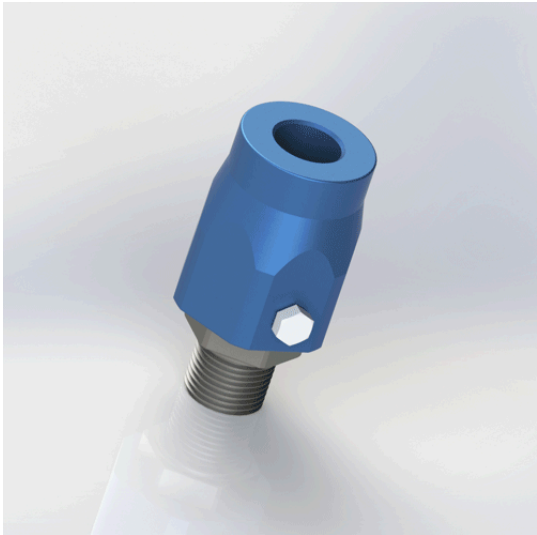

DIMENSIONAL REFERENCE

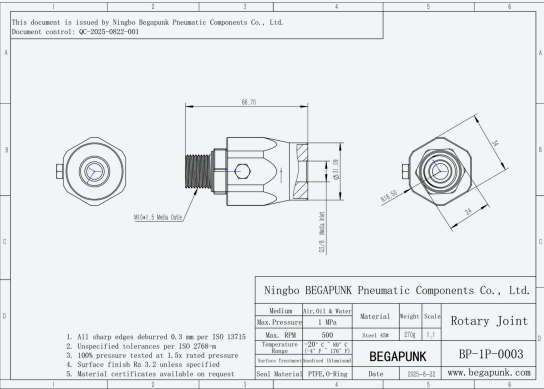

PRODUCT OVERVIEW

The BP-1P-0003 is configured as 1-in-1-out (single passage). The drawing specifies threaded connection. The engineering drawing identifies Air, oil, water as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 1-in-1-out (single passage)
- Threaded connection
- G3/8 inlet; M10 x 1.5 outlet

Configuration 1-in-1-out (single passage)

Maximum pressure 1 MPa / 10 bar

Maximum speed 500 rpm

Temperature range -20 to 80 deg C

Mounting Threaded connection

Ports / threads G3/8 inlet; M10 x 1.5 outlet

Body material Steel 45#

Seal PTFE, O-Ring

Drawing weight 0.27 kg

Drawing medium Air, oil, water

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)



Scan for product page

Final specifications are subject to the approved engineering drawing and application review.


MODEL

BP-1P-0006

1-in-8-out Rotary Joint



DIMENSIONAL REFERENCE

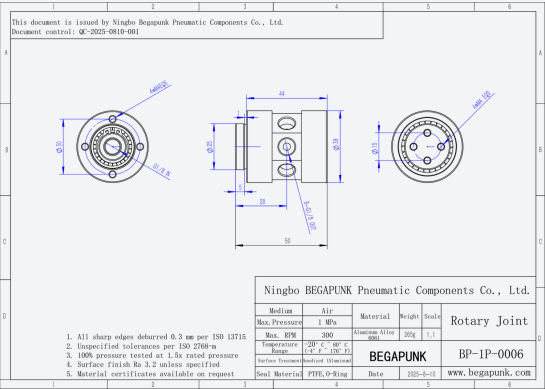

PRODUCT OVERVIEW

The BP-1P-0006 is configured as 1 inlet / 8 outlets. The drawing specifies 4 x M4 mounting holes at each end. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 1 inlet / 8 outlets
- 4 x M4 mounting holes at each end
- G1/8 inlet; 8 x G1/8 outlets

|                   |                                   |
|-------------------|-----------------------------------|
| Configuration     | 1 inlet / 8 outlets               |
| Maximum pressure  | 1 MPa / 10 bar                    |
| Maximum speed     | 300 rpm                           |
| Temperature range | -20 to 80 deg C                   |
| Mounting          | 4 x M4 mounting holes at each end |
| Ports / threads   | G1/8 inlet; 8 x G1/8 outlets      |
| Body material     | Aluminum Alloy 6061               |
| Seal              | PTFE, O-Ring                      |
| Drawing weight    | 0.265 kg                          |
| Drawing medium    | Air                               |

[View Product Online](#)   [Download 2D Drawing](#)   [Request a Quotation](#)




Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-2P-0001

2-in-2-out Rotary Joint


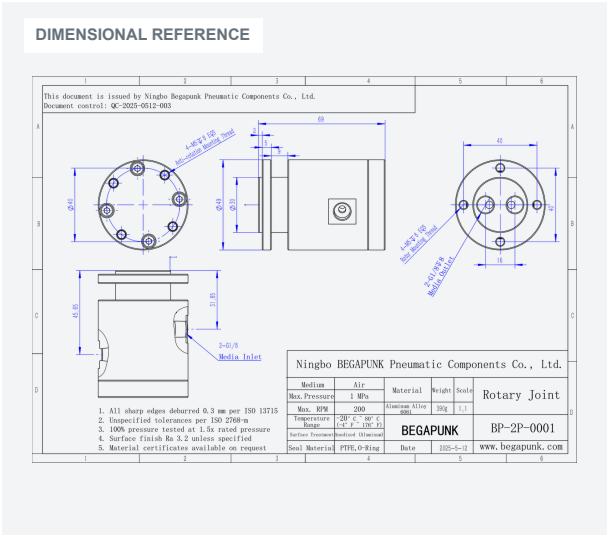




MODEL

BP-2P-0002

2-in-3-out (4mm) Rotary Joint

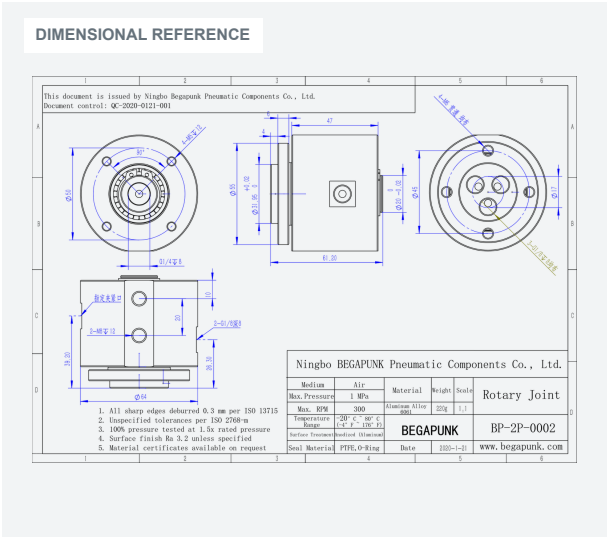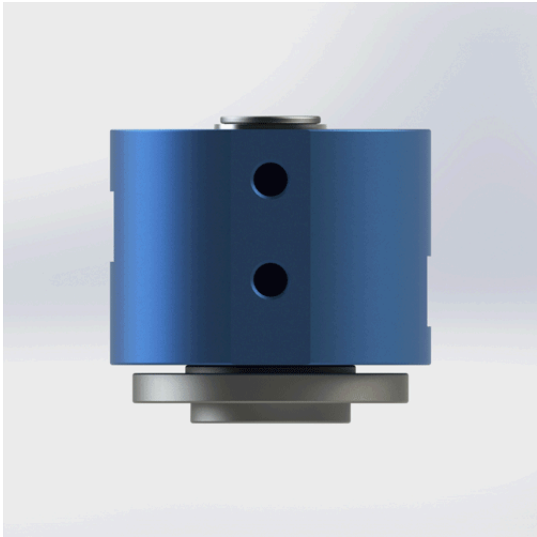

PRODUCT OVERVIEW

The BP-2P-0002 is configured as 2-in-3-out (2 inlets, 3 outlets). The drawing specifies m5, m6 and m8 mounting features; see drawing. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 2-in-3-out (2 inlets, 3 outlets)
- M5, M6 and M8 mounting features; see drawing
- G1/4 and G1/8 ports; see drawing

Configuration 2-in-3-out (2 inlets, 3 outlets)

Maximum pressure 1 MPa / 10 bar

Maximum speed 300 rpm

Temperature range -20 to 80 deg C

Mounting M5, M6 and M8 mounting features; see drawing

Ports / threads G1/4 and G1/8 ports; see drawing

Body material Aluminum Alloy 6061

Seal PTFE, O-Ring

Drawing weight 0.22 kg

Drawing medium Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-2P-08-0001

2-in-2-out Rotary Joint

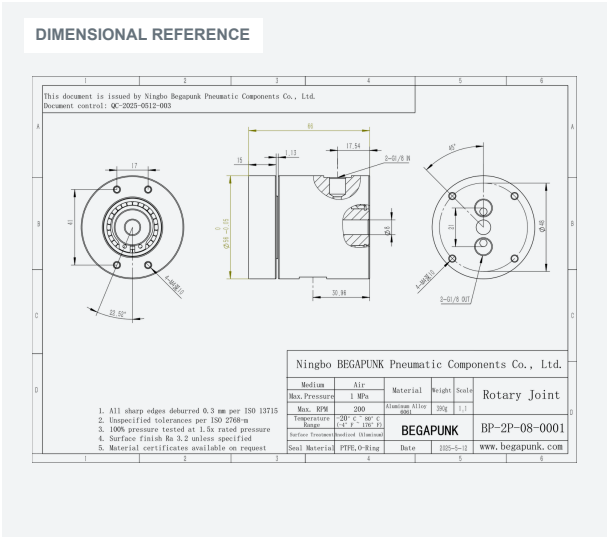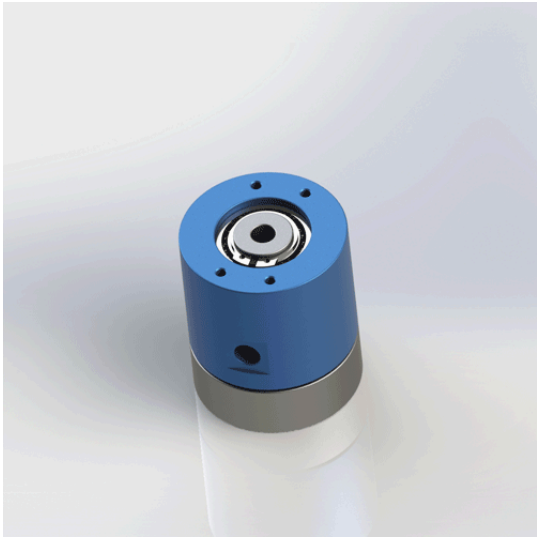

PRODUCT OVERVIEW

The BP-2P-08-0001 is configured as 2 passages (2-in-2-out). The drawing specifies 4 x M4, depth 10 mm. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 2 Passages (2-in-2-out)
- 4 x M4, depth 10 mm
- 2 x G1/8 inlets; 2 x G1/8 outlets

|                   |                                   |
|-------------------|-----------------------------------|
| Configuration     | 2 Passages (2-in-2-out)           |
| Maximum pressure  | 1 MPa / 10 bar                    |
| Maximum speed     | 200 rpm                           |
| Temperature range | -20 to 80 deg C                   |
| Mounting          | 4 x M4, depth 10 mm               |
| Ports / threads   | 2 x G1/8 inlets; 2 x G1/8 outlets |
| Body material     | Aluminum Alloy 6061               |
| Seal              | PTFE, O-Ring                      |
| Drawing weight    | 0.39 kg                           |
| Drawing medium    | Air                               |

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-2P-130-0001

2-in-2-out Rotary Joint

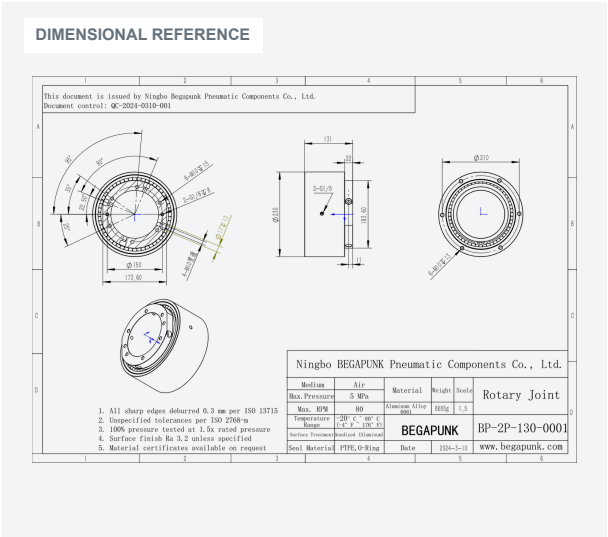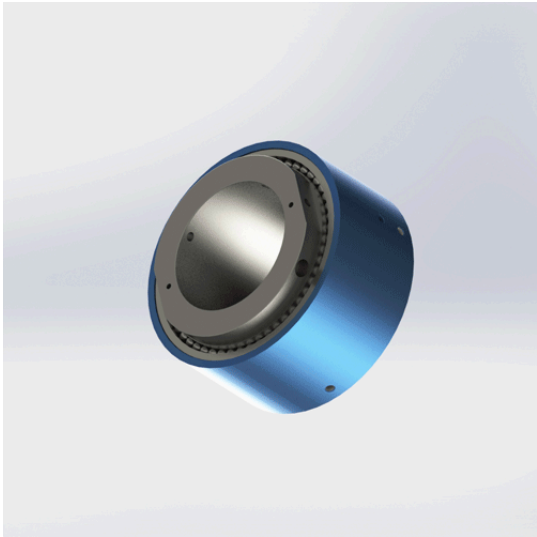

PRODUCT OVERVIEW

The BP-2P-130-0001 is configured as 2-in-2-out (dual passage). The drawing specifies m10 mounting features; see drawing. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 2-in-2-out (dual passage)
- M10 mounting features; see drawing
- 2 x G1/8 ports; see drawing

Configuration 2-in-2-out (dual passage)

Maximum pressure 5 MPa / 50 bar

Maximum speed 80 rpm

Temperature range -20 to 80 deg C

Mounting M10 mounting features; see drawing

Ports / threads 2 x G1/8 ports; see drawing

Body material Aluminum Alloy 6061

Seal PTFE, O-Ring

Drawing weight 8.655 kg

Drawing medium Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-2P-16-0001

2-in-2-out (16mm Bore) Rotary Joint

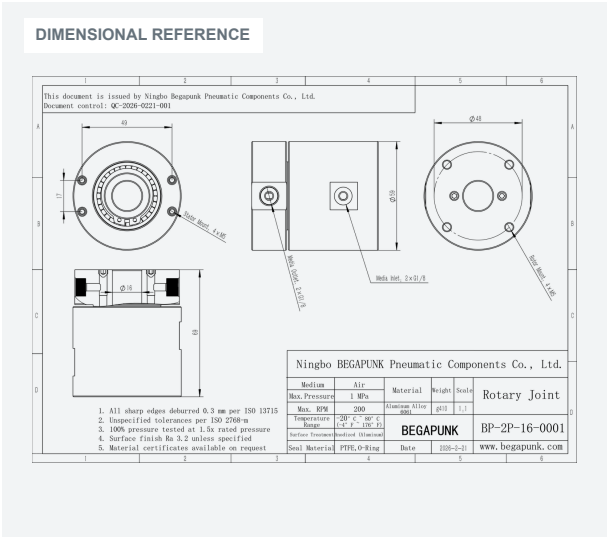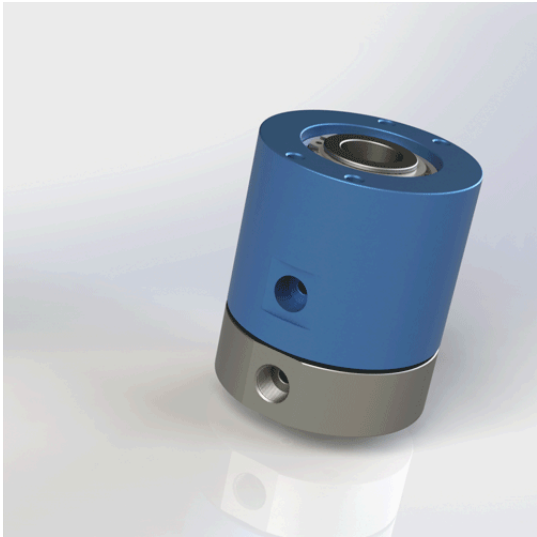

PRODUCT OVERVIEW

The BP-2P-16-0001 is configured as 2-in-2-out (16mm bore). The drawing specifies 4 x m5 stator mount; 4 x m5 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 2-in-2-out (16mm Bore)
- 4 x M5 stator mount; 4 x M5 rotor mount
- 2 x G1/8 inlets; 2 x G1/8 outlets

|                   |                                         |
|-------------------|-----------------------------------------|
| Configuration     | 2-in-2-out (16mm Bore)                  |
| Maximum pressure  | 1 MPa / 10 bar                          |
| Maximum speed     | 200 rpm                                 |
| Temperature range | -20 to 80 deg C                         |
| Mounting          | 4 x M5 stator mount; 4 x M5 rotor mount |
| Ports / threads   | 2 x G1/8 inlets; 2 x G1/8 outlets       |
| Body material     | Aluminum Alloy 6061                     |
| Seal              | PTFE, O-Ring                            |
| Drawing weight    | 0.41 kg                                 |
| Drawing medium    | Air                                     |

[View Product Online](#)   [Download 2D Drawing](#)   [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-2P-30-0001

2-in-2-out (Dia. 30mm) Rotary Joint

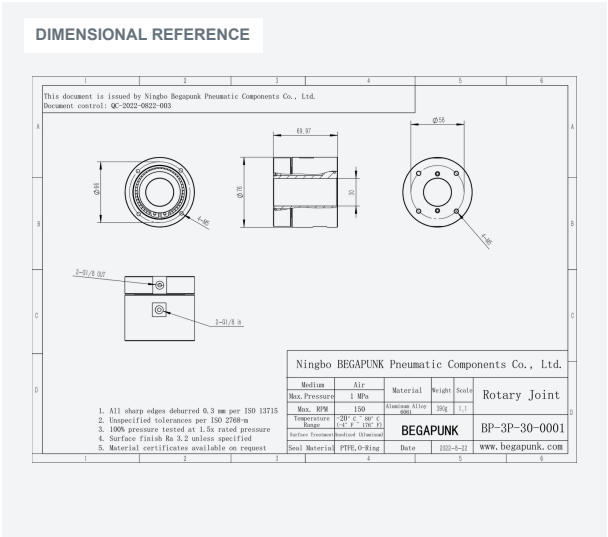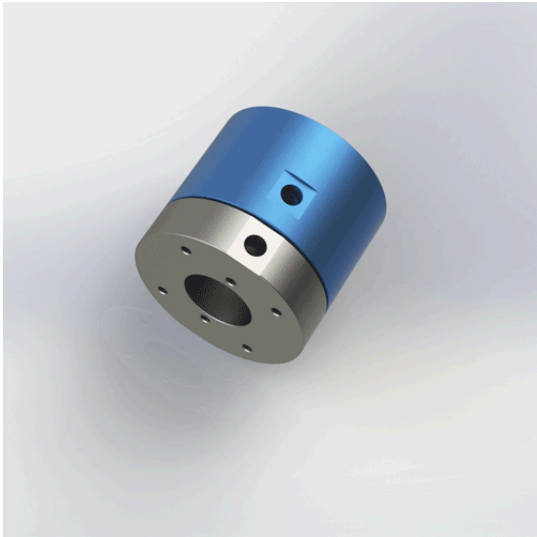

PRODUCT OVERVIEW

The BP-2P-30-0001 is configured as 2-in-2-out (dual passage). The drawing specifies 4 x m5 mounting holes at each end. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 2-in-2-out (dual passage)
- 4 x M5 mounting holes at each end
- 2 x G1/8 inlets; 2 x G1/8 outlets
- Dia. 30 mm

Configuration 2-in-2-out (dual passage)

Maximum pressure 1 MPa / 10 bar

Maximum speed 150 rpm

Temperature range -20 to 80 deg C

Mounting 4 x M5 mounting holes at each end

Ports / threads 2 x G1/8 inlets; 2 x G1/8 outlets

Body material Aluminum Alloy 6061

Drawing weight 0.39 kg

Drawing medium Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-2P-50-0001

2-in-2-out Rotary Joint

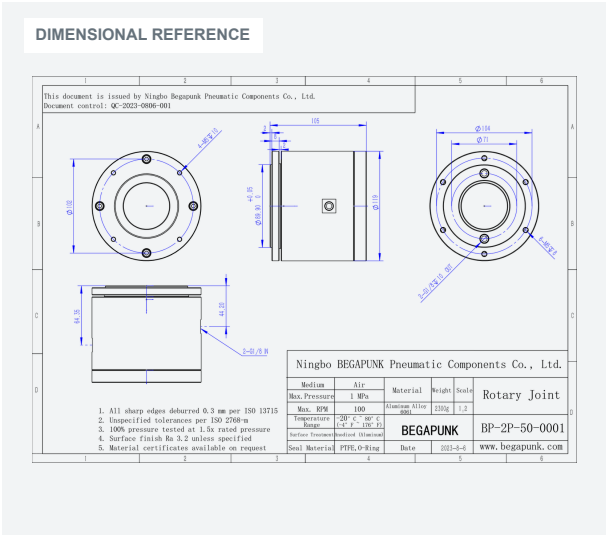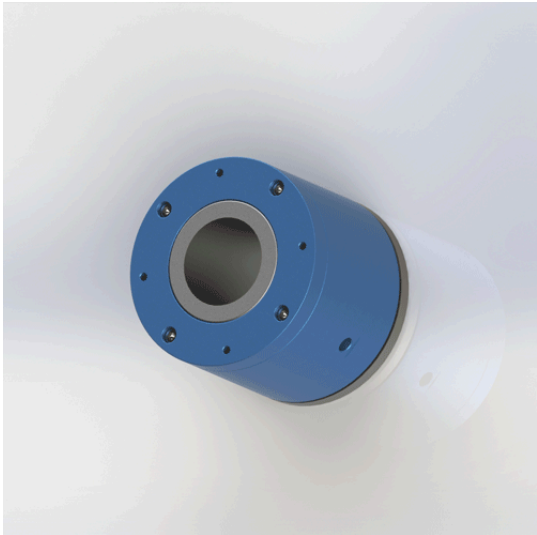

PRODUCT OVERVIEW

The BP-2P-50-0001 is configured as 2-in-2-out (dual passage). The drawing specifies 4 x m5 stator mount, depth 10 mm; 6 x m5 rotor mount, depth 8 mm. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 2-in-2-out (dual passage)
- 4 x M5 stator mount, depth 10 mm; 6 x M5 rotor mount, depth 8 mm
- 2 x G1/8 inlets; 2 x G1/8 outlets

|                   |                                                                  |
|-------------------|------------------------------------------------------------------|
| Configuration     | 2-in-2-out (dual passage)                                        |
| Maximum pressure  | 1 MPa / 10 bar                                                   |
| Maximum speed     | 100 rpm                                                          |
| Temperature range | -20 to 80 deg C                                                  |
| Mounting          | 4 x M5 stator mount, depth 10 mm; 6 x M5 rotor mount, depth 8 mm |
| Ports / threads   | 2 x G1/8 inlets; 2 x G1/8 outlets                                |
| Body material     | Aluminum Alloy 6061                                              |
| Seal              | PTFE, O-Ring                                                     |
| Drawing weight    | 2.3 kg                                                           |
| Drawing medium    | Air                                                              |

[View Product Online](#)   [Download 2D Drawing](#)   [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-2P-95-0005

2-in / 4-out Pneumatic Rotary Joint

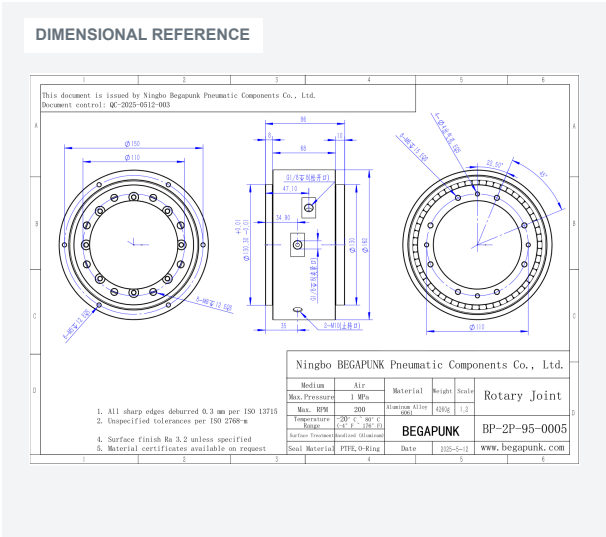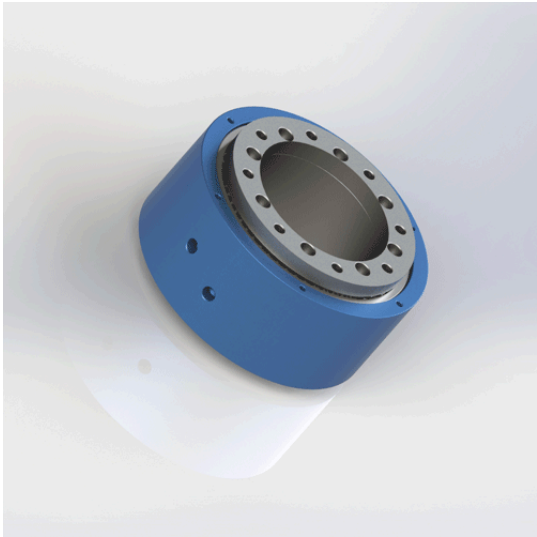

PRODUCT OVERVIEW

BP-2P-95-0005 is a 2-passage pneumatic rotary union with 2 inlets and 4 outlets for clamp/release functions. Maximum pressure is 1 MPa (10 bar); maximum speed is 200 rpm. Final suitability depends on the application and approved engineering drawing.

KEY CONFIGURATION

- 2-in / 4-out: clamp and release circuits
- 2 x G1/8 inlets; 4 x Dia. 4 mm outlets
- Face A: 6 x M5 + 8 x M8; face B: 8 x M6
- 2 x M10 anti-rotation features

Configuration 2-in-4-out (2 inlets, 4 outlets)

Maximum pressure 1 MPa / 10 bar

Maximum speed 200 rpm

Temperature range -20 to 80 deg C

Mounting Face A: 6 x M5 + 8 x M8; face B: 8 x M6;  
body: 2 x M10 anti-rotation

Ports / threads 2 x G1/8 inlets; 4 x Dia. 4 mm outlets

Body material Aluminum Alloy 6061

Seal PTFE, O-Ring

Drawing weight 4.26 kg

Drawing medium Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-3P-0004

3-in-3-out Rotary Joint

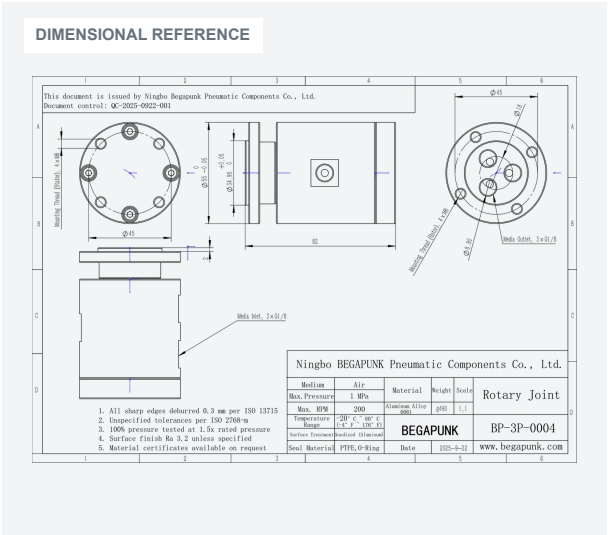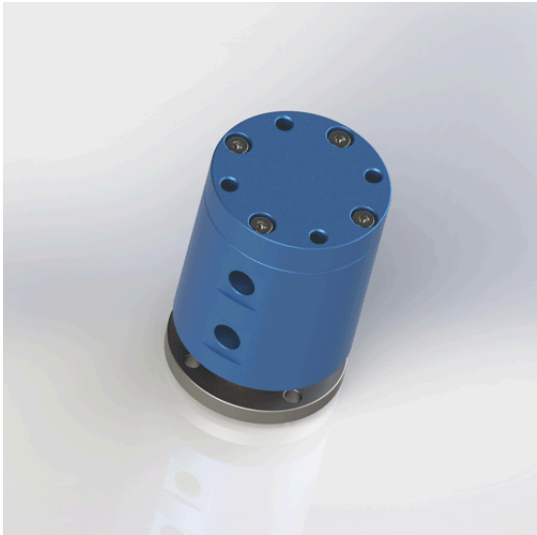

PRODUCT OVERVIEW

The BP-3P-0004 is configured as 3-in-3-out (triple passage). The drawing specifies 4 x m6 stator mount; 4 x m6 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 3-in-3-out (triple passage)
- 4 x M6 stator mount; 4 x M6 rotor mount
- 3 x G1/8 inlets; 3 x G1/8 outlets

Configuration 3-in-3-out (triple passage)

Maximum pressure 1 MPa / 10 bar

Maximum speed 200 rpm

Temperature range -20 to 80 deg C

Mounting 4 x M6 stator mount; 4 x M6 rotor mount

Ports / threads 3 x G1/8 inlets; 3 x G1/8 outlets

Body material Aluminum Alloy 6061

Seal PTFE, O-Ring

Drawing weight 0.49 kg

Drawing medium Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)



Scan for product page


Final specifications are subject to the approved engineering drawing and application review.




MODEL

BP-3P-0006

3-in-3-out (G1/4) Rotary Joint

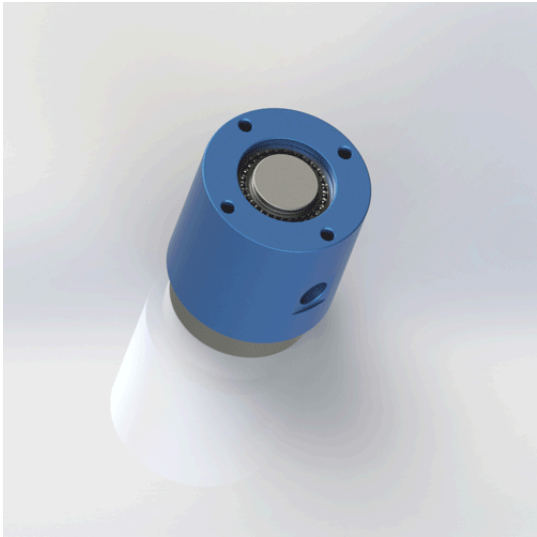

DIMENSIONAL REFERENCE

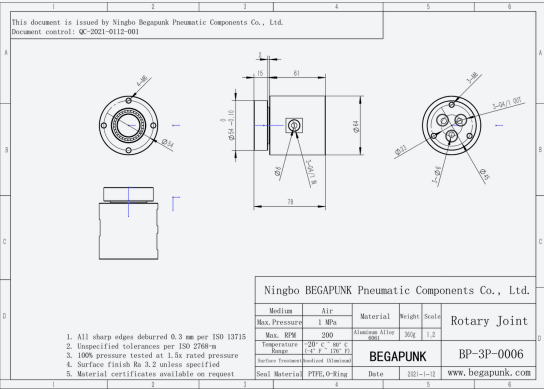

PRODUCT OVERVIEW

The BP-3P-0006 is configured as 3-in-3-out (triple passage). The drawing specifies 4 x m6 stator mount; 3 x m6 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 3-in-3-out (triple passage)
- 4 x M6 stator mount; 3 x M6 rotor mount
- 3 x G1/4 inlets; 3 x G1/4 outlets

Configuration 3-in-3-out (triple passage)

Maximum pressure 1 MPa / 10 bar

Maximum speed 200 rpm

Temperature range -20 to 80 deg C

Mounting 4 x M6 stator mount; 3 x M6 rotor mount

Ports / threads 3 x G1/4 inlets; 3 x G1/4 outlets

Body material Aluminum Alloy 6061

Drawing weight 0.36 kg

Drawing medium Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-3P-0007

3-in-3-out (4mm) Rotary Joint

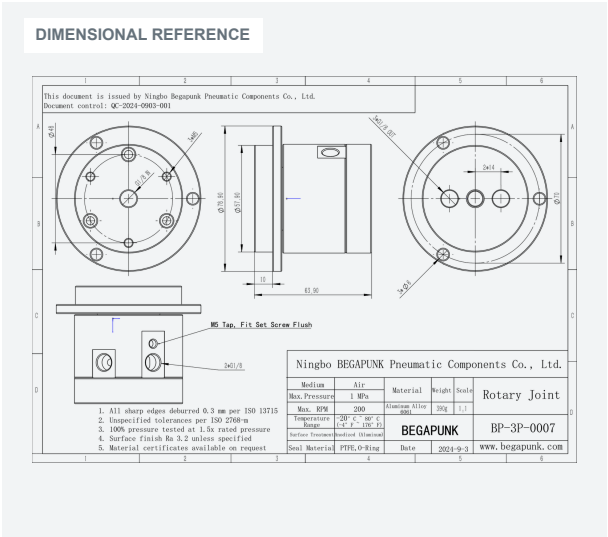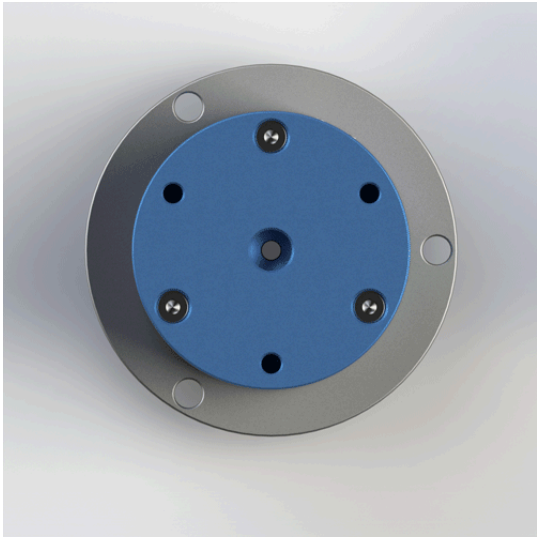

PRODUCT OVERVIEW

The BP-3P-0007 is configured as 3-in-3-out (triple passage). The drawing specifies 3 x m5 and 3 x 6 mm mounting holes. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 3-in-3-out (triple passage)
- 3 x M5 and 3 x 6 mm mounting holes
- G1/8 ports; see drawing

Configuration 3-in-3-out (triple passage)

Maximum pressure 1 MPa / 10 bar

Maximum speed 200 rpm

Temperature range -20 to 80 deg C

Mounting 3 x M5 and 3 x 6 mm mounting holes

Ports / threads G1/8 ports; see drawing

Body material Aluminum Alloy 6061

Seal PTFE, O-Ring

Drawing weight 0.39 kg

Drawing medium Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-3P-S06-0001

3 Passages + 6 Electrical Leads Pneumatic-Electrical Rotary Joint

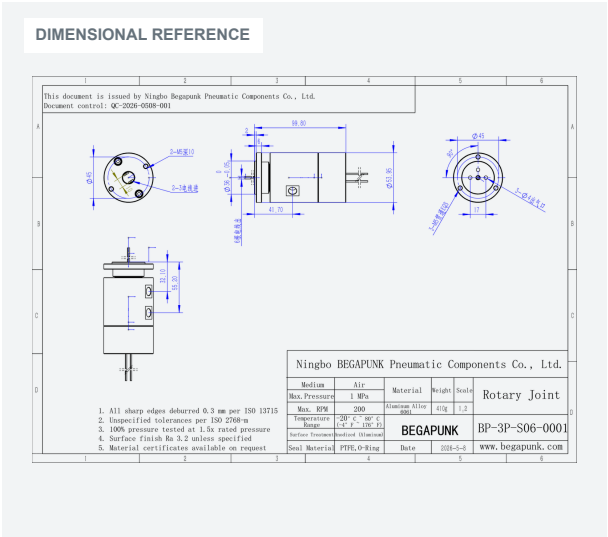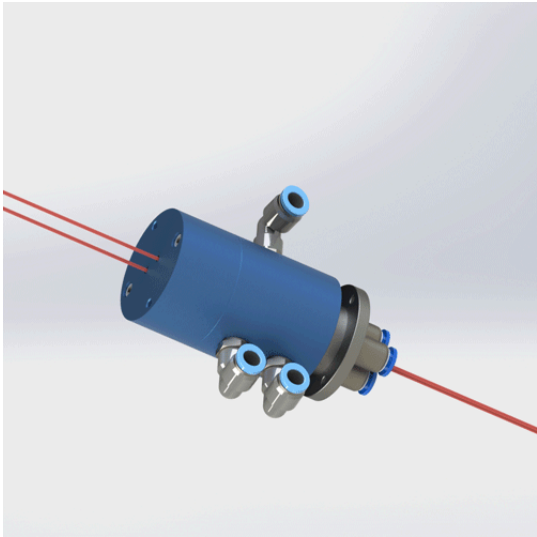

PRODUCT OVERVIEW

BP-3P-S06-0001 combines 3 pneumatic passages with 6 electrical leads. Pneumatic limits are 1 MPa (10 bar) and 200 rpm for air service. Electrical circuit allocation, voltage, current, signal type and shielding must be confirmed for the selected specification.

KEY CONFIGURATION

- 3 pneumatic passages + 6 electrical leads
- Face A: 2 x M5, depth 10 mm; face B: 3 x M5, depth 8 mm
- 3 x Dia. 4 mm air outlets; inlet per approved drawing
- Electrical ratings per selected specification

**Configuration** 3 pneumatic passages + 6 electrical leads

**Maximum pressure** 1 MPa / 10 bar

**Maximum speed** 200 rpm

**Temperature range** -20 to 80 deg C

**Mounting** 2 x M5, depth 10 mm; 3 x M5, depth 8 mm

**Ports / threads** 3 x Dia. 4 mm air outlets; inlet per approved drawing

**Body material** Aluminum Alloy 6061

**Drawing weight** 0.41 kg

**Drawing medium** Air

**Electrical** Ratings and circuit allocation per selected specification

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)





Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

MODEL

BP-4P-30-0001

4-in-4-out (Dia. 30mm Bore) Rotary Joint

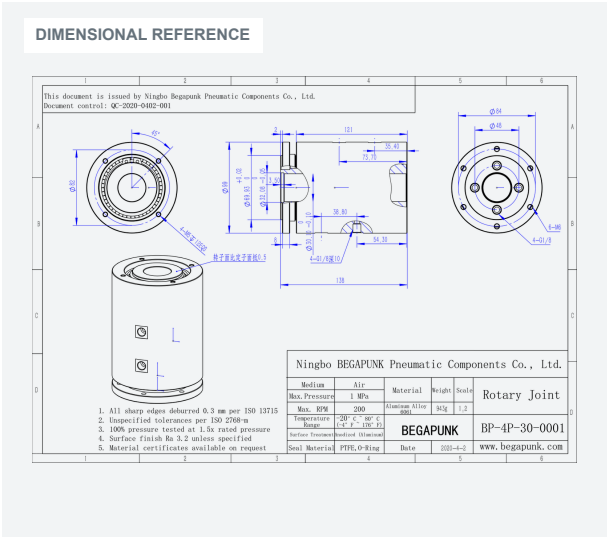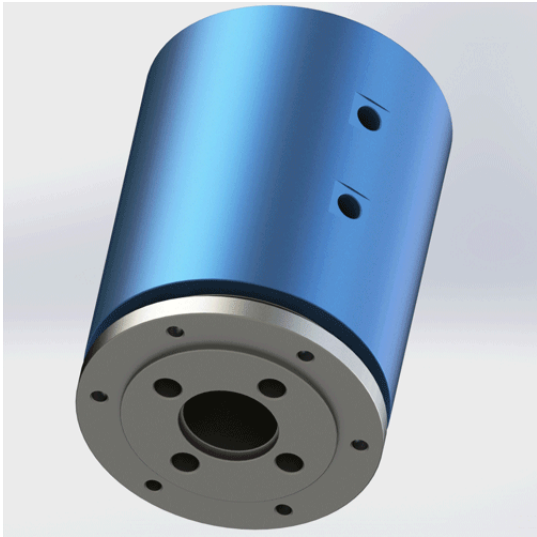

PRODUCT OVERVIEW

The BP-4P-30-0001 is configured as 4-in-4-out (quad passage, Dia. 30mm hollow bore). The drawing specifies 4 x m5 stator mount, depth 12 mm; 6 x m6 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

KEY CONFIGURATION

- 4-in-4-out (quad passage, Dia. 30mm hollow bore)
- 4 x M5 stator mount, depth 12 mm; 6 x M6 rotor mount
- 4 x G1/8 face A + 4 x G1/8 face B

Configuration

4-in-4-out (quad passage, Dia. 30mm hollow bore)

Maximum pressure

1 MPa / 10 bar

Maximum speed

200 rpm

Temperature range

-20 to 80 deg C

Mounting

4 x M5 stator mount, depth 12 mm; 6 x M6 rotor mount

Ports / threads

4 x G1/8 face A + 4 x G1/8 face B

Body material

Aluminum Alloy 6061

Seal

PTFE, O-Ring

Drawing weight

0.943 kg

Drawing medium

Air

[View Product Online](#) [Download 2D Drawing](#) [Request a Quotation](#)



Scan for product page

Final specifications are subject to the approved engineering drawing and application review.


## MODEL

**BP-8P-0001**

## 8-in-8-out Rotary Joint



## DIMENSIONAL REFERENCE

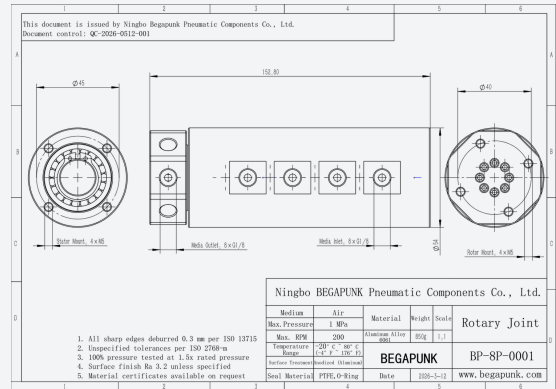

## PRODUCT OVERVIEW

The BP-8P-0001 is configured as 8-in-8-out (8 passages). The drawing specifies 4 x m5 stator mount; 4 x m5 rotor mount. The engineering drawing identifies Air as the drawing medium. Final suitability depends on application conditions and the approved engineering drawing.

## KEY CONFIGURATION

- 8-in-8-out (8 passages)
- 4 x M5 stator mount; 4 x M5 rotor mount
- 8 x G1/8 inlets; 8 x G1/8 outlets

|                          |                                         |
|--------------------------|-----------------------------------------|
| <b>Configuration</b>     | 8-in-8-out (8 passages)                 |
| <b>Maximum pressure</b>  | 1 MPa / 10 bar                          |
| <b>Maximum speed</b>     | 200 rpm                                 |
| <b>Temperature range</b> | -20 to 80 deg C                         |
| <b>Mounting</b>          | 4 x M5 stator mount; 4 x M5 rotor mount |
| <b>Ports / threads</b>   | 8 x G1/8 inlets; 8 x G1/8 outlets       |
| <b>Body material</b>     | Aluminum Alloy 6061                     |
| <b>Seal</b>              | PTFE, O-Ring                            |
| <b>Drawing weight</b>    | 0.85 kg                                 |
| <b>Drawing medium</b>    | Air                                     |

[View Product Online](#)    [Download 2D Drawing](#)    [Request a Quotation](#)

Scan for product page

Final specifications are subject to the approved engineering drawing and application review.

APPLICATION-SPECIFIC

# Custom Rotary Joint Solutions

Begapunk can review customer requirements and develop a preliminary configuration for technical and commercial evaluation.

## Evaluation Inputs

|                                          |                                               |
|------------------------------------------|-----------------------------------------------|
| Number of passages                       | Working pressure and rotational speed         |
| Pneumatic and fluid channel combinations | Temperature range                             |
| Special port threads                     | Material and seal configuration               |
| Rotor and housing interfaces             | Drain or leakage collection                   |
| Mounting flange dimensions               | Electrical slip-ring integration requirements |
| Center through bore                      | Installation envelope                         |

## Review Process



**FEASIBILITY STATEMENT** Custom feasibility, performance limits and commercial terms are confirmed after engineering review.

RFQ CHECKLIST

# Information Required for Quotation

To recommend a suitable model or evaluate a custom rotary joint, please provide the following information.

**01 Medium**  
Air, water, hydraulic oil, coolant, vacuum or other media.

**03 Pressure**  
Normal and maximum pressure for each passage.

**05 Temperature**  
Minimum and maximum temperatures.

**07 Flow**  
Required flow rate or minimum internal bore.

**09 Duty cycle**  
Continuous, intermittent or indexing rotation.

**11 Leakage**  
Acceptable level and collection requirement.

**13 Reference**  
Existing model, drawing, equipment photo or sample.

**02 Passages**  
Number of independent channels.

**04 Speed**  
Normal and maximum rpm.

**06 Ports**  
Thread type, tube diameter and direction.

**08 Mounting**  
Available diameter, length, flange and shaft dimensions.

**10 Runout**  
Expected radial and axial runout where available.

**12 Quantity**  
Prototype, initial order and estimated annual demand.

**14 Schedule**  
Required sample date and production schedule.

SEND DRAWINGS AND OPERATING CONDITIONS TO  
**sales@begapunk.com**

Requirement Submission > Engineering Review > Model Selection or Custom Evaluation > Drawing Confirmation > Quotation > Sample or Production





# Rotary Joint Solutions

## Ningbo Begapunk Pneumatic Components Co., Ltd.

**G. C. Cao**  
Sales Engineer

Mobile / WhatsApp

+86 18368425342

Email

[sales@begapunk.com](mailto:sales@begapunk.com)

Website

[www.begapunk.com](http://www.begapunk.com)

Address

No. 88, Yugong Road, Zonghan Industrial  
Zone,  
Ningbo, Zhejiang, China 315301



Website



Contact / RFQ