


RAW decode latency across the optimisation campaign

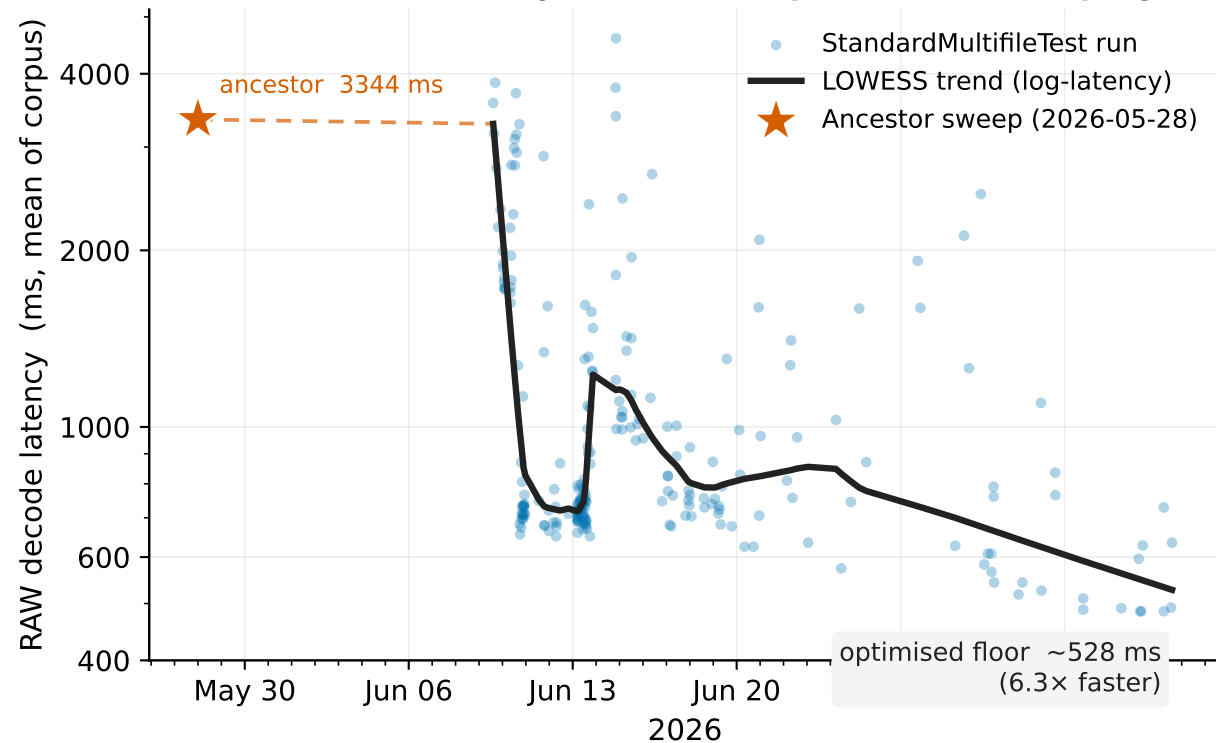

Config-independent metric (raw sensor → RGB); comparable across all runs. Scatter = individual runs (incl. thermal/power noise); curve = robust local regression on log-latency.