


M | Architects, Inc.

ARCHITECTURE
PLANNING
MANAGEMENT
DESIGN
2221 OLYMPIC BLVD.,
SUITE 100
WALNUT CREEK, CA
94595
925-287-1174 Tel
925-943-1581 Fax
925-878-9875 Cell
muthana@marchitect.com
www.marchitect.com

NOT FOR
CONSTRUCTION

CHEVRON GAS STATION,
CONVENIENCE STORE & CARWASH
4707 FIRST STREET
LIVERMORE, CA 94551

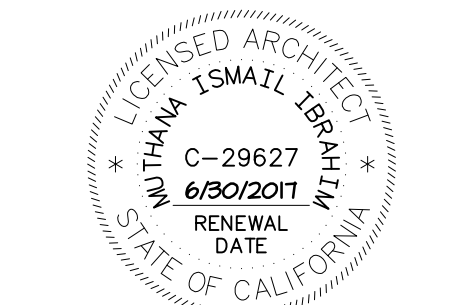

ISSUED FOR CONSTRUCTION
02-16-16 ISSUED FOR PLAN CHECK
12-21-18 ISSUED FOR PLANNING

NO.	DATE	DESCRIPTION
1	-	-
2	-	-
3	-	-
4	-	-
5	-	-

CONVENIENCE STORE FINISH
PLAN, NOTES & DETAILS

PROJECT #: 13-3903
DRAWN: BM CHECKED: MI
SCALE: AS NOTED DATE: 07-30-15

A1.3

SHEET OF

PAINT SPECIFICATIONS

PAINTING LEGEND

COLOR	SW NO. (SHERWIN WILLIAMS)
INTERACTIVE CREAM	SW 6113

PAINTING NOTES

- FINISH: APPLY SW COROTHANE I LOW VOC TO COMPONENT (SW B-TO SERIES) WATER BASED CATALYZED EPOXY AT THE RECOMMENDED NET FILM THICKNESS OF 2 MILS DFT PER COAT. APPLY PER SHERWIN WILLIAMS RECOMMENDATION.
- RESTROOMS: PAINT CEILING INTERACTIVE CREAM.
- SECURE STORAGE: PAINT INTERACTIVE CREAM.
- STORAGE AND SALES UTILITY: PAINT INTERACTIVE CREAM.
- MERCHANDISING AREA:
A) PAINT WALK-IN COOLER WALLS INTERACTIVE CREAM.
B) PAINT MAIN ENTRY GLAZING WALL INTERACTIVE CREAM.
- ALL DOORS TO BE PAINTED INTERACTIVE CREAM.
- CONTRACTOR SHALL INSPECT ALL SURFACES TO BE PAINTED PRIOR TO THE START OF ANY WORK AND SHALL NOTIFY THE COMPANY REP. IN WRITING OF CONDITIONS, MATERIALS, ETC. WHICH CAN AFFECT SATISFACTORY EXECUTION OR PERFORMANCE OF THE SPECIFIED WORK.
- DRYING: ALLOW SUFFICIENT DRYING TIME BETWEEN COATS, MODIFYING THE PERIOD AS RECOMMENDED BY THE MATERIAL MANUFACTURER TO SUIT ADVERSE WEATHER CONDITIONS.
- BRUSH APPLICATIONS: CLOUDINESS, SPOTTING, HOLIDAYS, LAPS, BRUSH MARKS, RUNS, SAGS, ROPINESS, AND OTHER SURFACE IMPERFECTIONS WILL NOT BE ACCEPTABLE.
- IN TOILET ROOMS AND CONTIGUOUS AREAS, ADD AN APPROVED FUNGICIDE TO PAINTS.
- PRE-PRIME EDGES WITH A "STRIP COAT" BRUSH APPLICATION (SW MACROPOXY 646 AT THE RECOMMENDED NET FILM THICKNESS OF 6 TO 9 MILS NET (5-7 MILS DFT) PER COAT. APPLY PER SHERWIN WILLIAMS RECOMMENDATION.

NOTE: EXCEPT FOR IN THE SALES AREA, SEMI-GLOSS PAINT MUST BE USED FOR ALL PAINTED WALLS

NOTES

- ALIGN THE TILE PATTERN W/ SLAB CONTROL JOINTS WHERE POSSIBLE. AT LOCATIONS WHERE THE ALIGNMENT IS NOT POSSIBLE, APPLY REDUCED TROWELABLE MEMBRANE OVER JOINT PER MANUFACTURER'S RECOMMENDATIONS.
- ALL INTERIOR GRAPHICS & MENU BOARDS, BY OTHERS.

TILE SPECIFICATIONS

SALES, CASHIER, HALLWAY, UTILITY / STORAGE & STORAGE

FIELD TILE: DAL-TILE, "BRITTON", #BX01, COLOR: "BONE", 12" x 12" x 5/16", UNPOLISHED
GROUT: USE CUSTOM BUILDING PRODUCTS "COMMERCIAL PORTLAND CEMENT GROUT", "FRISM", STAIN RESISTANT, #105, COLOR: "EARTH"
BASE TILE: DAL-TILE, "NATURAL HUES" #QH45, COLOR: "BLACK", 6" x 12" x 5/16", UNPOLISHED, 3/8" COVE BASE W/ FLAT TOP #Q-36126, SEE DTL. 19 ON THIS SHT.
GROUT: USE CUSTOM BUILDING PRODUCTS "COMMERCIAL PORTLAND CEMENT GROUT", "FRISM", STAIN RESISTANT, #60, COLOR: "CHARCOAL"

RESTROOMS

FIELD TILE: DAL-TILE, "BRITTON", #BX01, COLOR: "BONE", 12" x 12" x 5/16", UNPOLISHED
GROUT: USE CUSTOM BUILDING PRODUCTS "COMMERCIAL PORTLAND CEMENT GROUT", "FRISM", STAIN RESISTANT, #105, COLOR: "EARTH"
BASE TILE: DAL-TILE, "MATTE", #XT35, COLOR: "ALMOND", 6" x 6" x 5/16", W/ 3/8" COVE BASE #A-3601, SEE DTL. 19 THIS SHT.
WALL TILE: DAL-TILE, "MATTE SERIES" XT35, COLOR: "ALMOND", 6" x 6" x 5/16", SEE DTL. 16 THIS SHEET FOR ACCENT TILE SPECIFICATIONS
GROUT: USE CUSTOM BUILDING PRODUCTS "COMMERCIAL PORTLAND CEMENT GROUT", "FRISM", STAIN RESISTANT, #10, COLOR: "ANTIQUÉ WHITE"

CONTACT FOR TILE

DAL TILE
MATT LOZANO
(707) 365-5677
MATT.LOZANO@DALTILE.COM

GENERAL NOTES


INSTALLATION NOTES: INSTALL TILE PER MANUFACTURER'S RECOMMENDATIONS

TILE TO BE SET ON DIMENSIONALLY STABLE CONCRETE SUBFLOOR TO CONFORM TO ANSI A108.5 WITH ACRYLIC MODIFIED DRY SET MORTAR. ALL DRY SET MORTAR IS TO BE MIXED WITH ACRYLIC ADMIX IN LIEU OF WATER.

FLOOR TILE GROUTING IS TO CONFORM WITH ANSI A108.10 FOR GROUTING OF FLOOR TILE WITH ACRYLIC MODIFIED PORTLAND CEMENT GROUT. ALL GROUT IS TO BE MIXED WITH LIQUID WHICH CONSISTS OF ONE PART CLEAN WATER AND ONE PART ACRYLIC MORTAR ADMIX AS RECOMMENDED BY MANUFACTURER.

CLEANING NOTES: CLEAN TILE SURFACES AS THOROUGHLY AS POSSIBLE ON COMPLETION OF GROUTING AND REMOVE ALL GROUT HAZE. ACID BASED CLEANERS SPECIFICALLY PROHIBITED. RINSE TILEWORK THOROUGHLY WITH CLEAN WATER BEFORE AND AFTER USING AQUA MIX HEAVY DUTY TILE & GROUT CLEANER. POLISH W/ SOFT CLOTH.

SEALING: SEAL GROUT WITH CUSTOM BUILDING PRODUCTS PENETRATING SEALER, APPLY PER MANUFACTURER'S RECOMMENDATIONS.

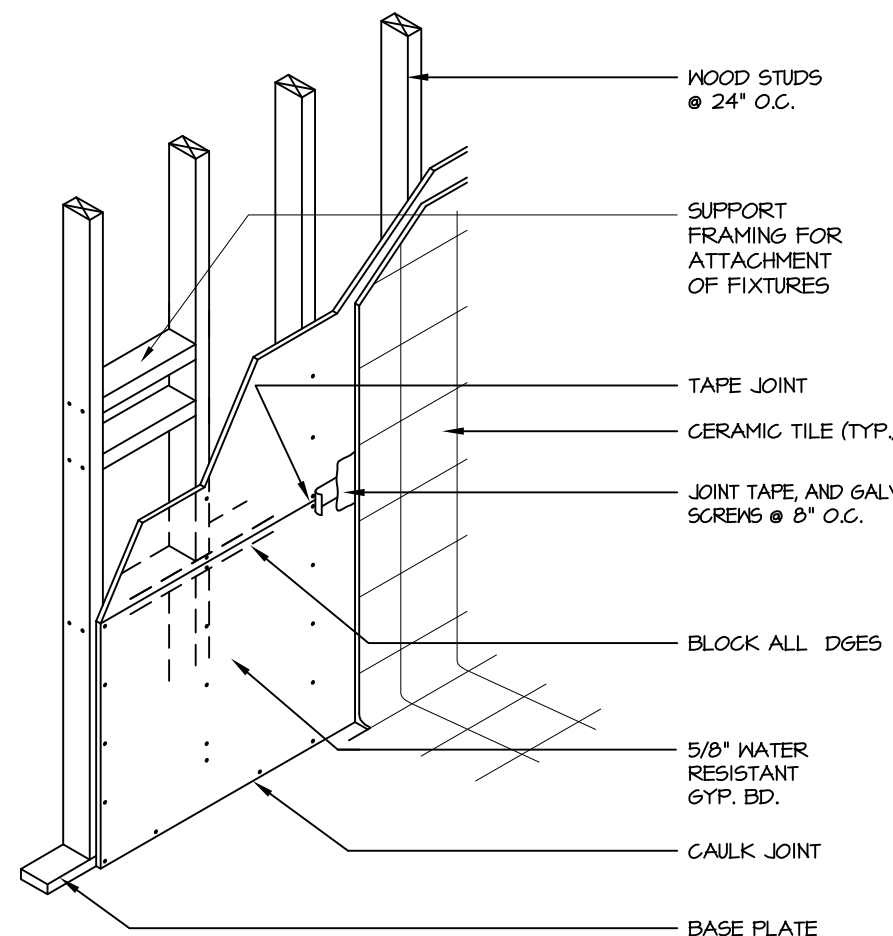

11 WALL BACKING


NONE

ROOM FINISH SCHEDULE


INTERIOR FINISHES	SALES AREA, CASHIER & UTILITY / STORAGE	SECURE STORAGE	RESTROOM(S)	FIRE RISER	WALK-IN COOLER & FREEZER
FLOOR	12" x 12" CERAMIC TILE, SEE TILE SPECIFICATIONS	SEALED CONCRETE W/ 2 COATS SCOFFIELD SYSTEMS, GURESEAL-M, (OR APPROVED EQUAL). COLOR: CLEAR	12" x 12" CERAMIC TILE, SEE TILE SPECIFICATIONS	SEALED CONCRETE W/ 2 COATS SCOFFIELD SYSTEMS, GURESEAL-M, (OR APPROVED EQUAL). COLOR: CLEAR	WALK-IN COOLER: SEALED CONCRETE W/ 2 COATS SCOFFIELD SYSTEMS, GURESEAL-M, (OR APPROVED EQUAL). COLOR: CLEAR WALK-IN FREEZER: PREFABRICATED WALK-IN FREEZER PANELS
BASE	6" x 12" CERAMIC TILE, SEE TILE SPECIFICATIONS & FINISH NOTE #2	6" TOP SET RUBBER COVE BASE OR APPROVED EQUAL COLOR: AS SELECTED BY OWNER, SEE FINISH NOTE #2	6" x 6" CERAMIC TILE, SEE TILE SPECIFICATIONS & FINISH NOTE #2	6" TOP SET RUBBER COVE BASE OR APPROVED EQUAL COLOR: AS SELECTED BY OWNER, SEE FINISH NOTE #2	6" TOP SET MTL. COVE BASE, PROVIDED BY WALK-IN COOLER/FREEZER MANUFACTURER. SEAL BASE AT FLOOR & WALL. ANCHORS W/ CLEAR WASHABLE SEALANT, SEE FINISH NOTE #2
WALLS	SMOOTH FINISH 5/8" GYP. BD. (TAPED, FINISHED & PAINTED), SEE PAINTING SPECIFICATIONS	6" x 6" CERAMIC TILE, SEE TILE SPECIFICATIONS	6" x 6" CERAMIC TILE, SEE TILE SPECIFICATIONS	SMOOTH FINISH 5/8" GYP. BD. (TAPED, FINISHED & PAINTED), SEE PAINTING SPECIFICATIONS	PREFABRICATED WALK-IN COOLER & FREEZER PANELS. PROVIDE SMOOTH FINISH 5/8" GYP. BD. (TAPED, FINISHED & PAINTED) ON SALES AREA SIDE, SEE PAINTING SPECIFICATIONS
CEILING	USG INTERIORS 3270-"STIPPLE WHITE", VINYL FACED, NON-PERFORATED, 24" x 48" x 1", SUSPENSION SYSTEM; US GYPSUM DX 15161, OR APPROVED EQUAL	PAINTED SMOOTH FINISH 5/8" GYP. BD. (TAPED, FINISHED & PAINTED), SEE PAINTING SPECIFICATIONS	PAINTED SMOOTH FINISH 5/8" GYP. BD. (TAPED, FINISHED & PAINTED), SEE PAINTING SPECIFICATIONS	OPEN TO STRUCTURE	PREFABRICATED WALK-IN COOLER & FREEZER PANELS TO MATCH WALL PANELS
CEILING HEIGHT	11'-6"		10'-6"	NONE	11'-0" (VERIFY W/ MANUFACTURER)

FINISH NOTES:

- THE WALL & CEILING SURFACES ABOVE THE BEVERAGE COUNTER, RESTROOM & UTILITY/STORAGE ROOM SHALL BE SMOOTH & WASHABLE WITHOUT ANY TEXTURE OR STIPPLING AND BE LIGHT-COLORED (LIGHT - REFLECTANCE VALUE - 70 MIN).
- ALL BASE FINISHES SHALL BE A MINIMUM 4" HIGH W/ A 3/8" INCH CONTINUOUS COVE BASE.
- ALL INTERIOR WALL AND CEILING FINISHES IN THE "M" OCCUPANCY SHALL HAVE A CLASS "C" FLAME SPREAD RATING OF 76-200, PER CBC 2013 TABLE 803.4.




NORTH

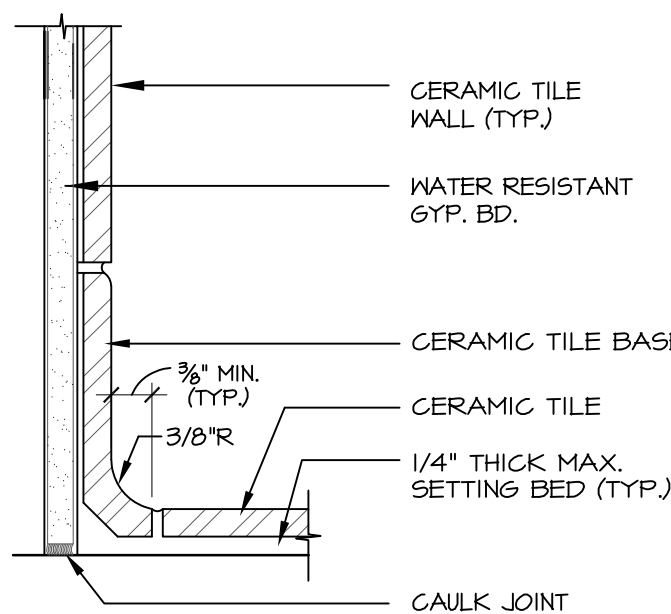


19 TILE BASE @ TILE WALL

NONE

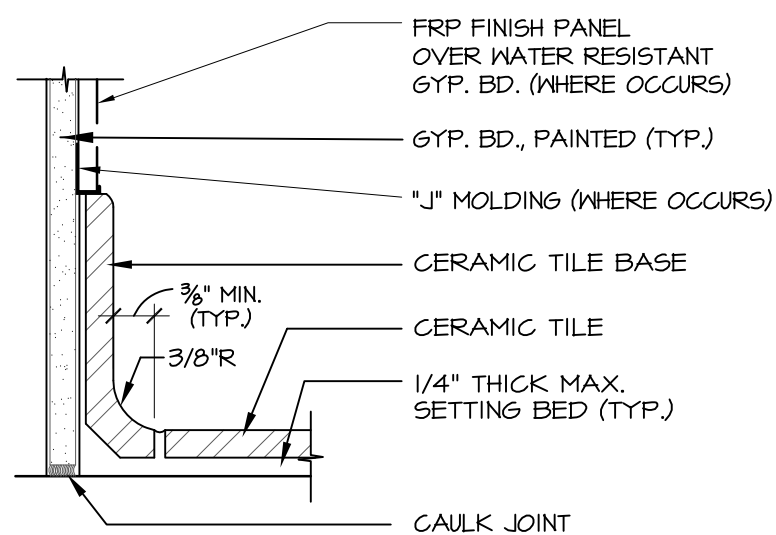


A- TYPICAL TILE BASE

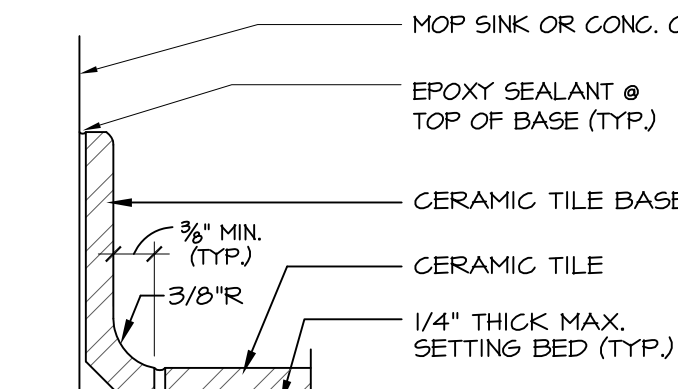

B- TYPICAL TILE BASE

18 TYPICAL TILE BASE

NONE

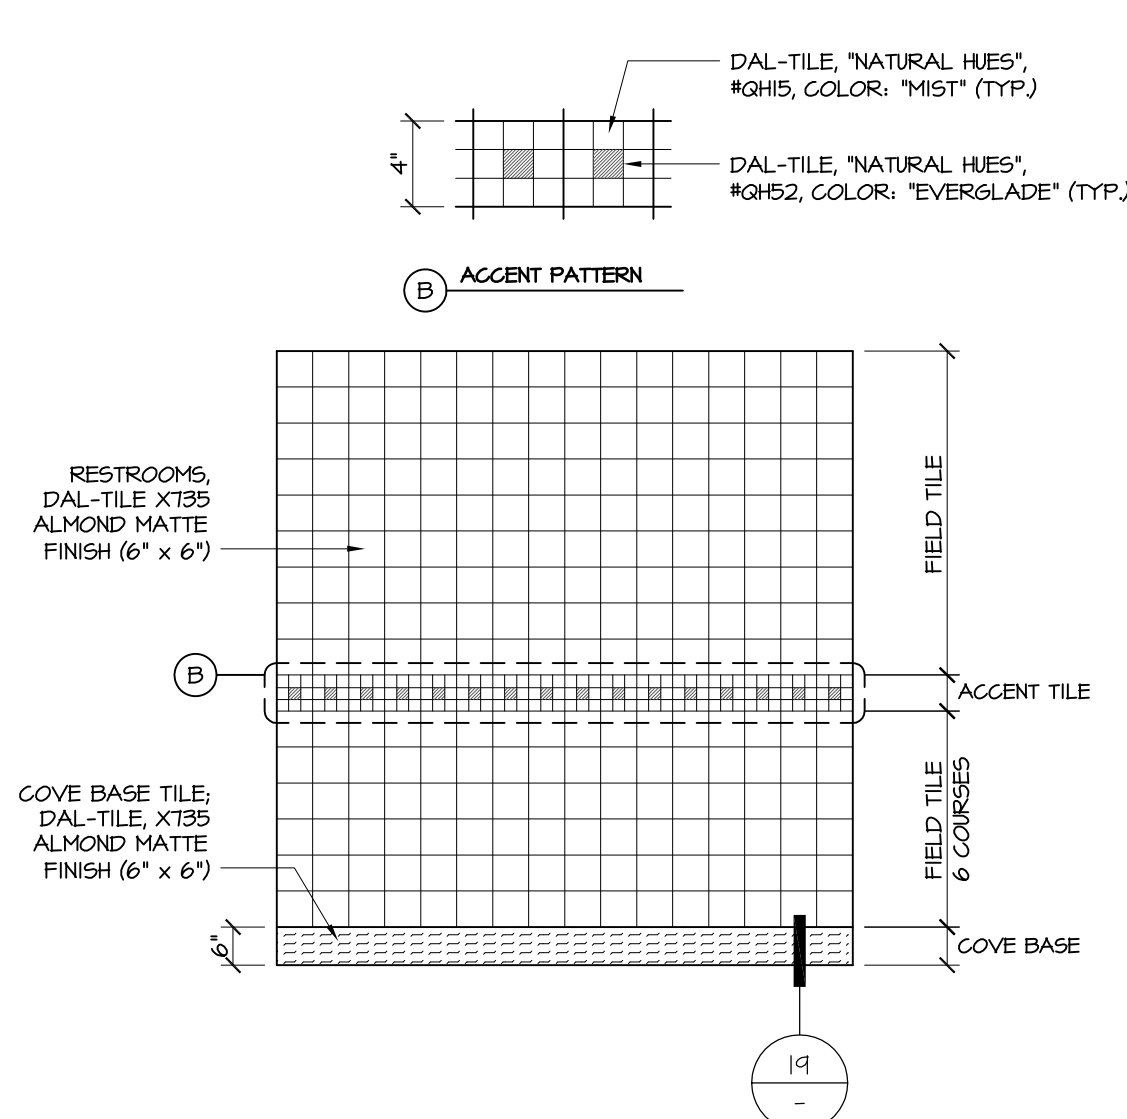

17 WALL / BASE @ RESTROOM(S)

NONE

16 TYPICAL WALL / BASE ELEVATION

16

NONE