用户手册 User Manual

聚合物锂电池 103450 3.7V 2000mAh

Li-Polymer Battery 103450 3.7V 2000mAh

一、产品介绍 / Product Introduction

感谢您购买本款 103450 聚合物锂电池。本产品采用高品质锂聚合物电芯，具有体积小、重量轻、能量密度高、循环寿命长等特点，广泛应用于各类数码产品、智能穿戴设备、医疗仪器、手持终端、DIY 电子项目等。

Thank you for purchasing our 103450 Li-Polymer battery. Featuring high-quality lithium polymer cells, this battery offers compact size, light weight, high energy density, and long cycle life. It is widely used in various digital devices, smart wearables, medical instruments, handheld terminals, and DIY electronics projects.

二、技术规格 / Specifications


项目 Item	参数 Specification
型号 Model	103450
电池类型 Type	锂聚合物 (Li-Polymer)
标称电压 Nominal Voltage	3.7V
充电电压 Charging Voltage	4.2V
额定容量 Capacity	2000mAh
尺寸 Dimensions	厚度 10mm × 宽度 34mm × 长度 50mm
循环寿命 Cycle Life	≥ 500 次

三、接线说明 / Wiring Instructions


□ 重要 / IMPORTANT □

红色导线：连接 正极 (+) —— Red wire: Positive (+)

黑色导线：连接 负极 (-) —— Black wire: Negative (-)

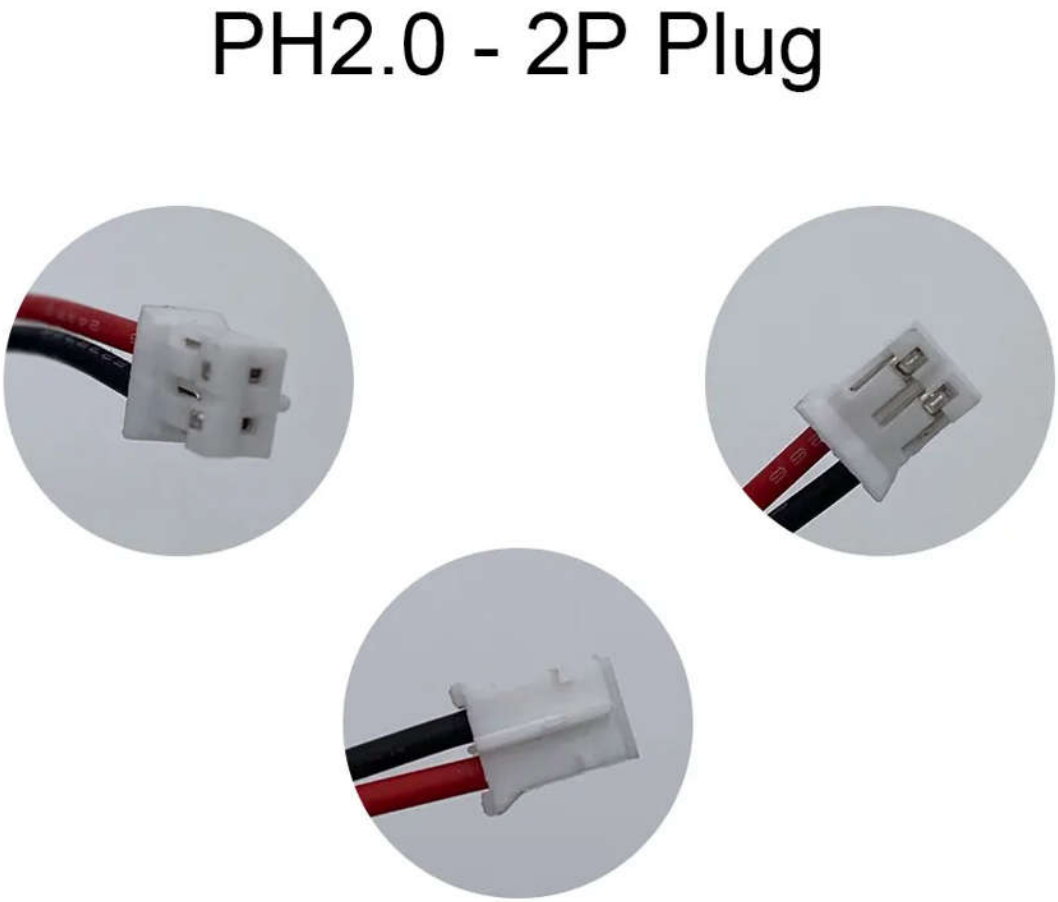

-
-
-
-
-
-

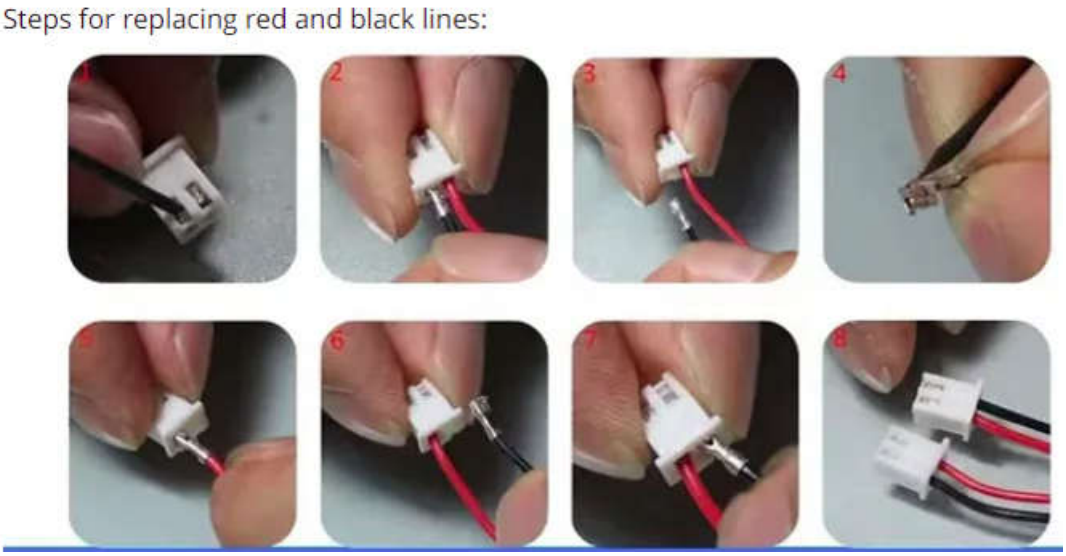- 如果接入设备后不工作，可能是极性连接错误，你可以尝试更换红线与黑线的位置，步骤如下：
- If the device does not work after being connected, it may be due to a polarity connection error. You can try changing the position of the red and black lines. The steps are as follows:
- 

四、使用说明 / Operation Instructions

1. 首次使用 / First Use

新电池出厂时通常带有约 50%电量。建议先**充满电再使用**，以激活电池最佳性能。

New batteries typically ship with about 50% charge. It is recommended to **fully charge before first use** for optimal performance.

-

2. 充电说明 / Charging Instructions

推荐充电电流：建议使用 **0.5C (1000mA) 至 1C (2000mA)** 的电流充电，以延长电池寿命。

严禁过充：当电池电压达到 4.2V 时，请及时断开充电器。超过 4.25V 可能导致电池鼓包、漏液或起火。

Recommended Charging Current: 0.5C (1000mA) to 1C (2000mA) to prolong battery life.

No Overcharging: Disconnect the charger once the battery reaches 4.2V. Exceeding 4.25V may cause swelling, leakage, or fire.

-

3. 放电说明 / Discharging Instructions

放电截止电压：建议不低于 **3.0V**。低于 2.75V 会造成过放，永久性损坏电池。

大功率设备：若用于高电流设备，请确保放电电流不超过电池规格（建议≤2C，即≤2400mA）。

Discharge Cut-off Voltage: Do not discharge below **3.0V**. Going below 2.75V may cause permanent damage.

High-Power Devices: If used in high-current applications, ensure the discharge current does not exceed the battery's rating (recommended ≤2C, i.e., ≤2400mA).

-

五、安全警告 / Safety Warnings

为了您的安全，请严格遵守以下警告：

For your safety, strictly follow these warnings:

禁止反接：接线前务必确认极性。

No Reverse Connection: Always confirm polarity before connecting.

禁止短路：请勿让正负极引线接触。

No Short Circuit: Do not allow positive and negative leads to touch.

禁止拆解：请勿拆解、挤压、刺穿电池。内部电解液具有腐蚀性。

Do Not Disassemble: Do not crush, puncture, or disassemble. The internal electrolyte is corrosive.

防水防火：请勿浸水或投入火中。远离高温环境。

Keep Away from Water & Fire: Do not immerse in water or throw into fire. Keep away from high temperatures.

儿童勿触：请放置在儿童接触不到的地方。

Keep Away from Children: Keep out of reach of children.

六、维护与保养 / Maintenance Tips

长期存放：若超过 1 个月不使用，请将电池充/放电至 **3.7V-3.8V**（约 50%电量），存放于阴凉干燥处。每隔 2-3 个月补充电一次。

Long-term Storage: If not used for over a month, charge/discharge to **3.7V-3.8V** (~50% charge) and store in a cool, dry place. Recharge every 2-3 months.

避免过放：请勿将电池耗至 3.0V 以下，否则容量会永久性衰减。

Avoid Deep Discharge: Do not drain below 3.0V, or capacity will permanently decrease.

环保回收：废旧电池请勿随意丢弃，应送至专业回收点。

Recycle Properly: Do not dispose of with household waste. Take to a professional recycling center.

-

七、包装清单 / Package Includes

-

1 x 103450 聚合物锂电池 / Li-Polymer Battery (with wires)

-