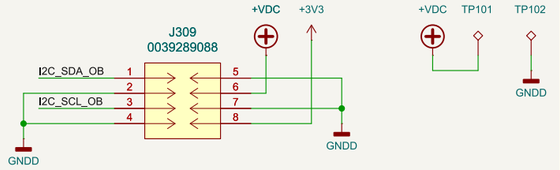

OFF-BOARD I2C, MCU POWER INPUT

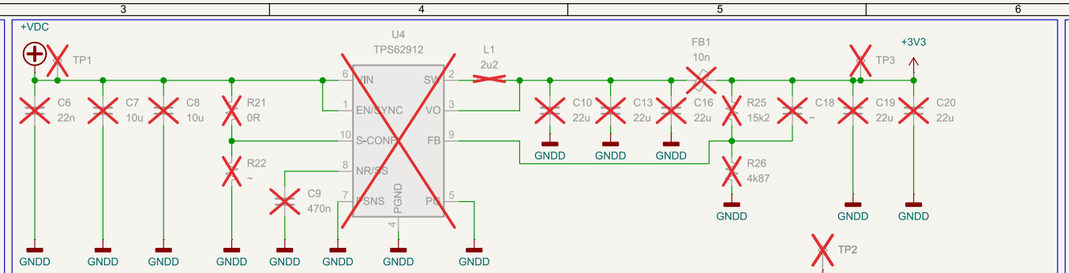

3v3 Logic Supply

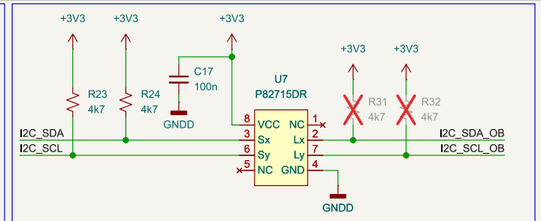

I2C CABLE DRIVER

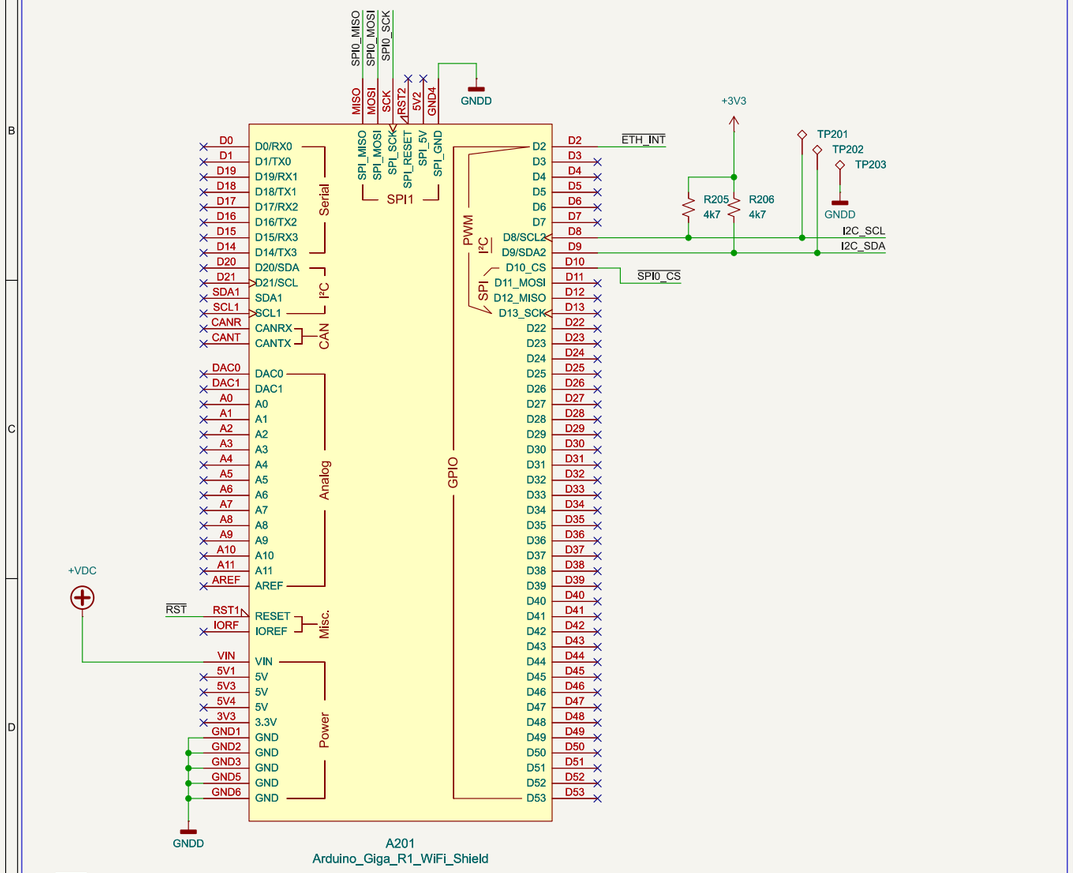

MICROCONTROLLER

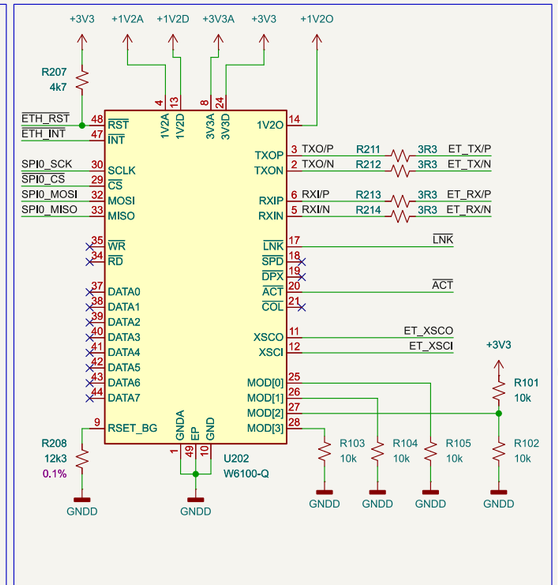

ETH MAC AND PHY

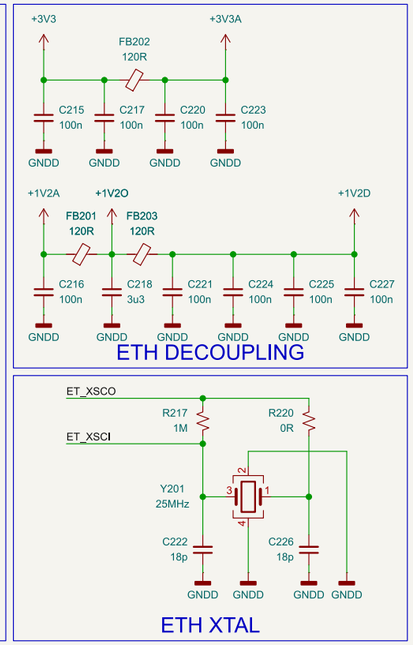

ETH DECOUPLING

ETH XTAL

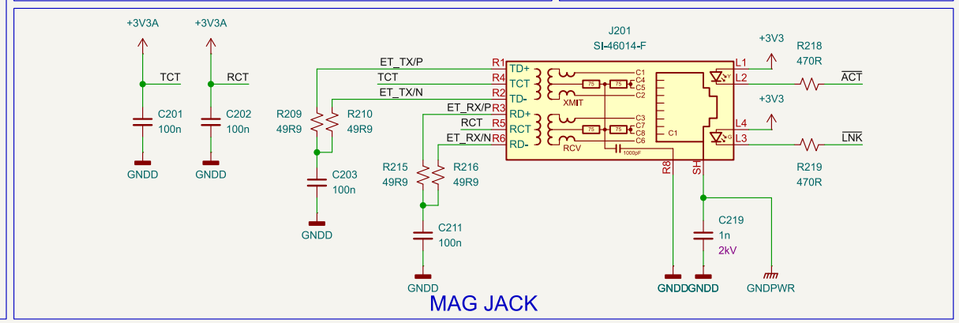

MAG JACK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES DIMENSIONS IN BRACKETS [XX.XX] (WHERE PRESENT) ARE MILLIMETERS AND ARE FOR REFERENCE ONLY INTERPRET DRAWING AS PER ANSI Y14.5-1994 OR Y32.2-1995	PROJECT / END ITEM: ISOLATED MULTI-RAIL POWER SUPPLY MONITOR	BOARD / ASSEMBLY: GIGA MONITOR MAIN PCB CGS-PSM-001	Capotosto GS, Inc.

DIMENSIONAL TOLERANCES X. = +/- 0.060 .X = +/- 0.030 .XX = +/- 0.015 .XXX = +/- 0.005	ANGULAR TOLERANCE ±0.5°	FINISH 125	BREAK EDGES & SHARP CORNERS 0.005 MIN. TO 0.030 MAX

DRAWN BY	M. CAPOTOSTO	08/05/2026	SCHEMATIC DIAGRAM MULTI-RAIL ISOLATED POWER SUPPLY MONITOR
CHECKED BY	N/A	N/A	
VACUUM APPROVAL	N/A	N/A	
ENGINEER APPROVAL	M. CAPOTOSTO	08/05/2026	
SUPERVISOR APPROVAL	N/A	N/A	
ES&H APPROVAL	N/A	N/A	
QA APPROVAL	N/A	N/A	

NEXT_ASSY:		THIRD ANGLE PROJECTION	SCALE: SEE DWG VIEW	WBS#	ES&H RISK LEVEL
PROJECT:					

B	CGS-PSM-13	A	SHEET 1 OF 1
SHEET SIZE	DRAWING/PART NUMBER:	REVISION	

CGS-PSM-13

KICad E.D.A. 9.0.6