


FABRICATION NOTES:

- DRC'S MUST BE RUN ON THE GERBERS PRIOR TO BUILDING BOARDS
- 1.) BOARD MATERIAL: (SEE STACKUP BELOW)
- RF35 □ RO4003
 - ⊗ FR-4 □ RO4350
 - 4000-13EP
- 2.) BOARD STACKUP
- COMPONENTS ON TOP SIDE ONLY ⊗ COMPONENTS ON BOTH SIDES
 - 6 LAYERS
 - FINISHED OVERALL THICKNESS:
 - .031 +/- .005
 - ⊗ .062 +/- .005
 - .093 +/- .005
 - .125 +/- .005
- 3.) COPPER WEIGHT:
- EXTERNAL LAYERS: (SEE STACKUP BELOW) OUNCE FINISHED
 - INTERNAL LAYERS: (SEE STACKUP BELOW) OUNCE FINISHED
- 4.) PLATING:
- ⊗ HOT AIR SOLDER LEVEL (HASL) EXPOSED AREAS WITH LEADED SOLDER FINISH 50uIN MIN - 200uIN MAX.
 - FINISH: AS PER IPC ENIG. SPECIFICATION 4522, 2-4 MICRO-INCHES IMMERSION GOLD OVER 120-240 MICRO-INCHES NICKEL
 - OMIKRON WHITE TIN DEPOSITION PROCESS OR ANDREW APPROVED EQUIVALENT TIN PLATING SHALL BE 200 TO 250 MICRO INCHES IN THICKNESS.
 - STANDARD SPEC.
- 5.) DRILLING:
- UNLESS OTHERWISE SPECIFIED, PLATE ALL HOLES THRU.
 - SEE HOLE CHART FOR FINISHED HOLE SIZES AND QUANTITY.
- 6.) HOLE SIZE TOLERANCES SHALL BE: (SEE HOLE CHART)
- 7.) SOLDERMASK:
- TOP SIDE
 - BOTTOM SIDE
 - LIQUID PHOTO-IMAGEABLE SOLDERMASK SHALL BE APPLIED OVER BARE COPPER UNLESS OTHERWISE SPECIFIED
 - ⊗ GREEN
 - BLUE
 - RED
 - BLACK
 - MATTE BLACK
- 8.) SILKSCREEN:
- ⊗ TOP SIDE
 - ⊗ BOTTOM SIDE
 - ⊗ CHARACTER LEGEND TO BE SCREENED USING NON-CONDUCTIVE EPOXY BASED INK.
 - ⊗ WHITE
 - _____
- 9.) BOW AND TWIST: MAXIMUM ACCEPTABLE IS 0.75% (IPC-TM-650)
- 10.) FABRICATE IN ACCORDANCE WITH IPC-6011/6012, CLASS 2 (LATEST REVISIONS)
- 11.) ACCEPTABILITY TO IPC-A-600 (LATEST REVISIONS)
- 12.) CONDUCTOR INFORMATION:
- DRC MUST BE RUN ON GERBERS BEFORE BUILDING BOARDS UNLESS APPROVAL IS GIVEN IN WRITING.
 - SMALLEST TRACE: 6 mil
 - SMALLEST SPACING: 6 mil
 - CONDUCTOR WIDTHS AND SPACING SHALL BE WITHIN +/-20% OF ARTWORK ORIGINALS.
- 13.) REMOVE ALL BURRS AND BREAK SHARP EDGES 0.015 INCHES MAX
- 14.) VENDOR INFORMATION:
- VENDOR WILL PUT THEIR UL LOGO AND DATE CODE IN SILKSCREEN ON THE COMPONENT SIDE IN THE UNOBSTRUCTED AREA

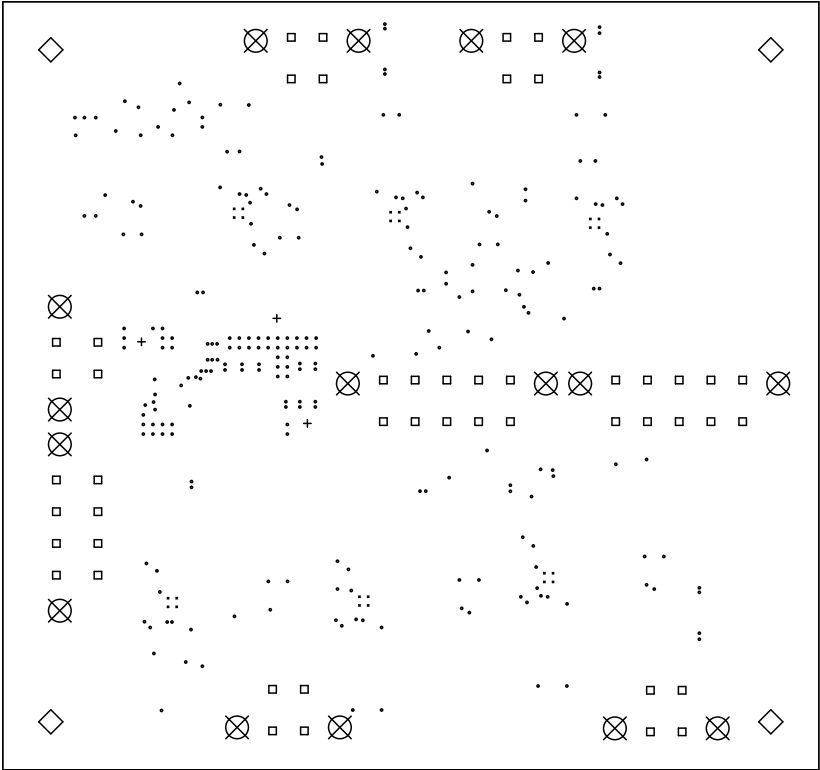


DRILL DRAWING
SK-001-02
REV-A 08/05/2026

BOARD CHARACTERISTICS

Copper Layer Count:	6	Board Thickness:	0.0630 in
Board overall dimensions:	4.2500 in x 4.0000 in		
Min track/spacing:	0.0060 in / 0.0060 in	Min hole diameter:	0.0118 in
Copper Finish:	None	Impedance Control:	No
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

- Drill Map:
- 0.200mm / 0.0079" (24 holes)
 - 0.300mm / 0.0118" (249 holes)
 - + 1.000mm / 0.0394" (3 holes)
 - 1.400mm / 0.0551" (48 holes)
 - ◇ 3.200mm / 0.1260" (4 holes)
 - ⊗ 3.000mm / 0.1181" (16 holes) (not plated)

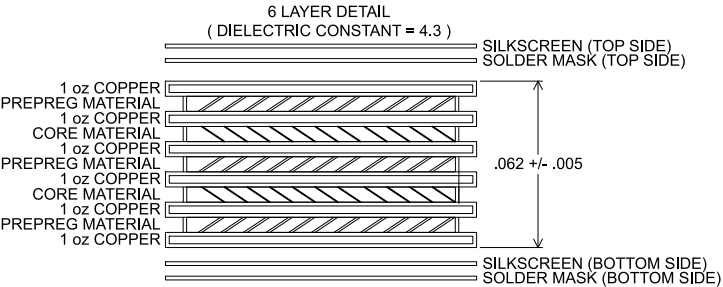

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES DIMENSIONS IN BRACKETS [XX.XX] (WHERE PRESENT) ARE MILLIMETERS AND ARE FOR REFERENCE ONLY INTERPRET DRAWING AS PER ANSI Y14.5-1994 OR Y32.2-1995			PROJECT / END ITEM: ISOLATED MULTI-RAIL POWER SUPPLY MONITOR		BOARD / ASSEMBLY: GIGA MONITOR MAIN PCB CGS-PSM-001		 Capotosto GS, Inc.			
DIMENSIONAL TOLERANCES X. = +/- 0.060 .X = +/- 0.030 .XX = +/- 0.015 .XXX = +/- 0.005		ANGULAR TOLERANCE ±0.5°		DRAWN BY	M. CAPOTOSTO	08/05/2026	PCB FAB DRAWING MULTI-RAIL ISOLATED POWER SUPPLY MONITOR			
				CHECKED BY	N/A	N/A				
		FINISH 125✓		VACUUM APPROVAL	N/A	N/A				
				ENGINEER APPROVAL	M. CAPOTOSTO	08/05/2026				
				SUPERVISOR APPROVAL	N/A	N/A				
ES&H APPROVAL		N/A	N/A	B	SK-001-02			A		
QA APPROVAL		N/A	N/A							
NEXT_ASSY:		BREAK EDGES & SHARP CORNERS 0.005 MIN. TO 0.030 MAX				SHEET SIZE		DRAWING/PART NUMBER:		REVISION
PROJECT:		 THIRD ANGLE PROJECTION	SCALE: SEE DWG VIEW		WBS#		ESH&O RISK LEVEL			SHEET 1 OF 1