

10			11		
REVISION HISTORY					
REV	DESCRIPTION	DATE	DESIGNER	CHECKED BY	ENGINEER
1	INITIAL RELEASE		XX	XX	XX

BOARD CHARACTERISTICS

Copper Layer Count:	6	Board Thickness:	60.87 mils
Board overall dimensions:	9500.00 mils x 3000.00 mils		
Min trace/spacing:	6.00 mils / 5.91 mils	Min hole diameter:	11.81 mils
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mils)	Color	Epsilon R	Loss Tangent
SST	Top Silk Screen	Not specified	0 mils	Not specified	1	0
PMT	Top Solder Paste		0 mils		1	0
SMT	Top Solder Mask	Not specified	0.3937 mils	Green	3.3	0
LY01	copper		1.37795 mils		1	0
Dielectric	prepreg	2116	5.11811 mils	FR4 natural	4.45	0
LY02	copper		1.37795 mils		1	0
Dielectric	core	DK	16.92913 mils	FR4 natural	4.6	0
LY03	copper		1.37795 mils		1	0
Dielectric	prepreg	7628	7.71654 mils	FR4 natural	4.74	0
LY04	copper		1.37795 mils		1	0
Dielectric	core	DK	16.92913 mils	FR4 natural	4.6	0
LY05	copper		1.37795 mils		1	0
Dielectric	prepreg	2116	5.11811 mils	FR4 natural	4.5	0.02
LY06	copper		1.37795 mils		1	0
SMB	Bottom Solder Mask	Not specified	0.3937 mils	Green	3.3	0
PMB	Bottom Solder Paste		0 mils		1	0
SSB	Bottom Silk Screen	Not specified	0 mils	Not specified	1	0

1	Top	Sig	Edge coupled microstrip .17/.15 mm 100 Ohm differential 10%
2	In1	GND	
3	In2	PWR	
4	In3	Sig	
5	In4	GND	
6	Bot	Sig	Edge coupled microstrip .17/.15 mm 100 Ohm differential 10%


6 LAYER DETAIL
(DIELECTRIC CONSTANT = 4.3)

SILKSCREEN (TOP SIDE)
SOLDER MASK (TOP SIDE)

1 oz COPPER
PREPREG MATERIAL
CORE MATERIAL
1 oz COPPER
PREPREG MATERIAL
1 oz COPPER
CORE MATERIAL
1 oz COPPER
PREPREG MATERIAL
1 oz COPPER
PREPREG MATERIAL
1 oz COPPER

1.6mm


SILKSCREEN (BOTTOM SIDE)
SOLDER MASK (BOTTOM SIDE)

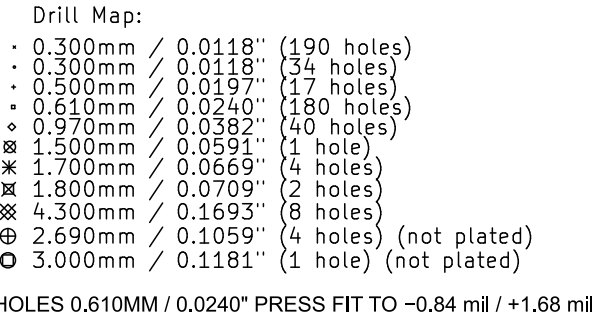


NEXT_ASSY:
PROJECT:

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES DIMENSIONS IN BRACKETS [XXX] (WHEN PRESENT) ARE MILLIMETERS AND ARE FOR REFERENCE ONLY INTERPRET DRAWING AS PER ANSI Y14.1-2003 OR Y32.2-1995		 Brookhaven National Laboratory		BROOKHAVEN NATIONAL LABORATORY BROOKHAVEN SCIENCE CAMPUS UPTON, NEW YORK 11973 <i>Expanding Life's Frontiers</i>		 NSLS-II NATIONAL SYNCHROTRON LIGHT SOURCE II	
DIMENSIONAL TOLERANCES X. = +/- 0.060 X. = +/- 0.030 .XX = +/- 0.015 .XXX = +/- 0.005		ANGULAR TOLERANCE ±0.5°		DRAWN BY Joe Mead CHECKED BY Joe Mead DESIGN APPROVAL Joe Mead ES&S APPROVAL Danny Pedraza QA APPROVAL Nicole Magliola		PCB FAB DRAWING ACM-II AFE Board	
FINISH 125/		WBS#		C		SK-2601-52	
BREAK EDGES & SHARP CORNERS 0.005 MIN. TO 0.030 MAX		THIRD ANGLE PROJECTION		SCALES SEE DRAWING		ES&S A-2	
DRAWING PART NUMBER:		REVISION		SHEET 1 OF 1		1	


SK-2601-52

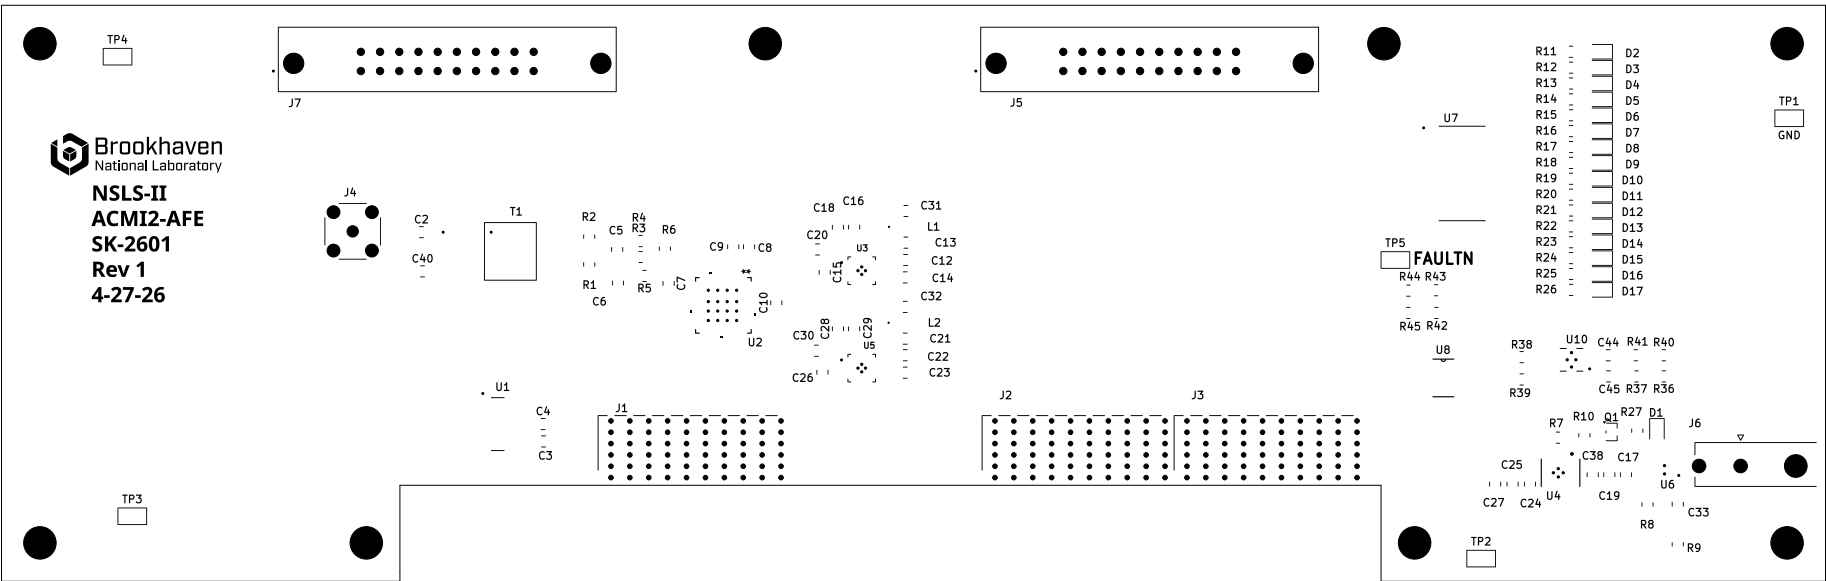


SILKSCREEN TOP
SK-2601-51
REV-1
(VIEWED THRU COMPONENT SIDE)

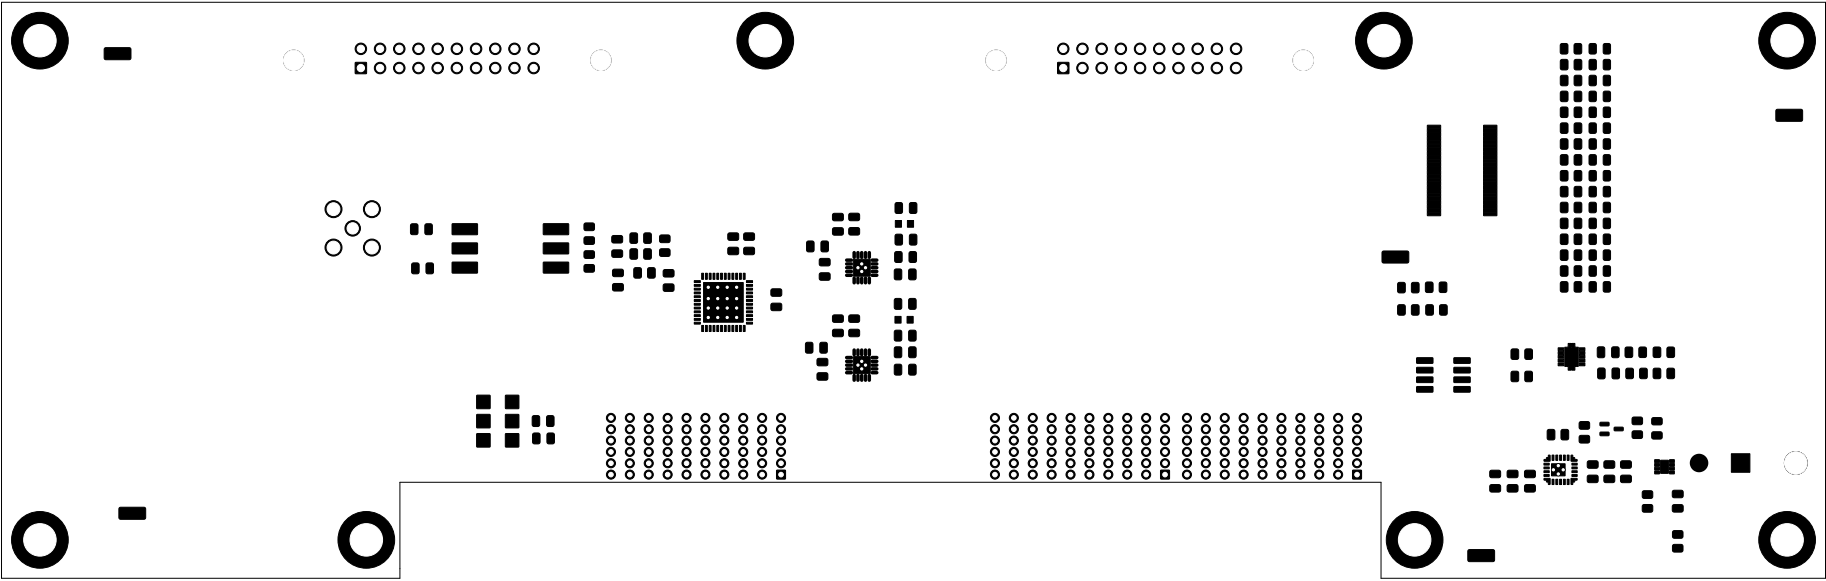


SOLDER MASK TOP
SK-2601-51
REV-1

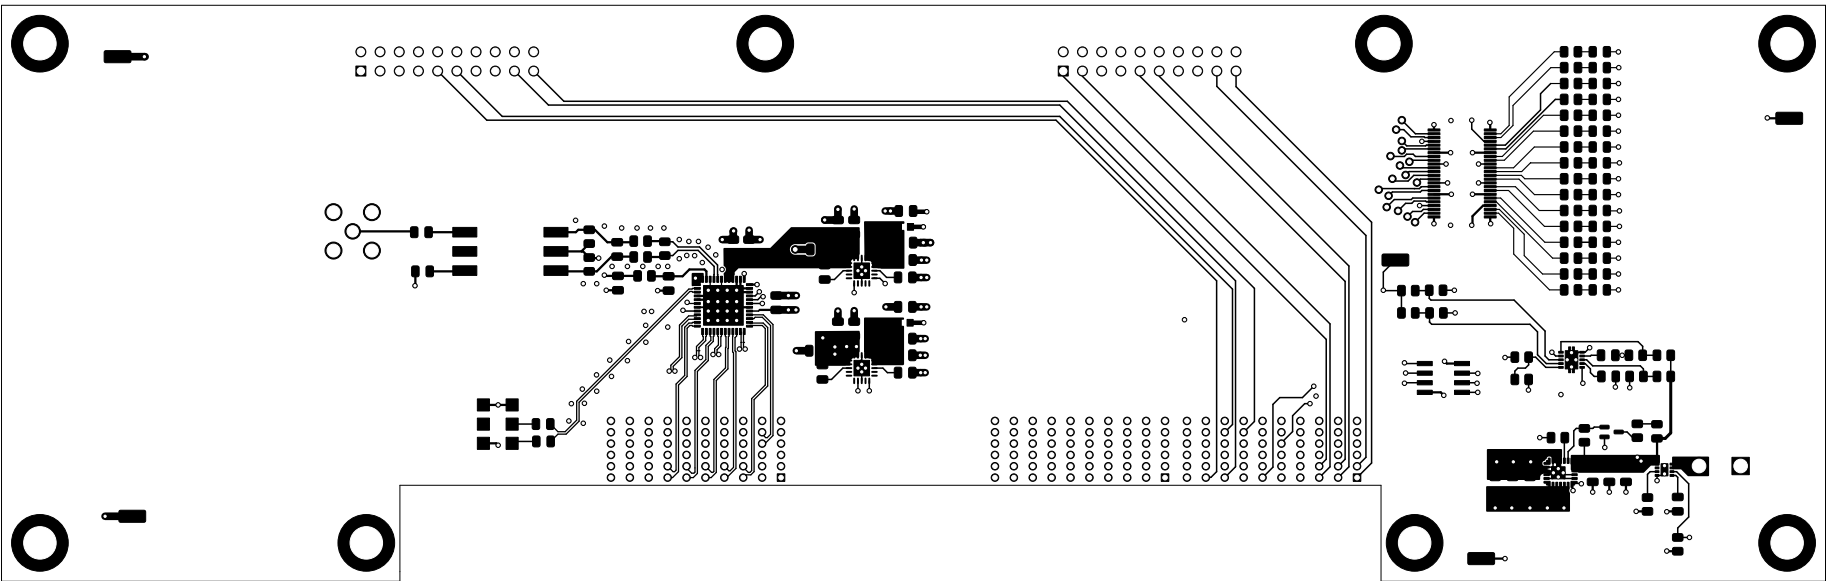


LAYER 1 COMPONENT SIDE
SK-2601-51
REV-1

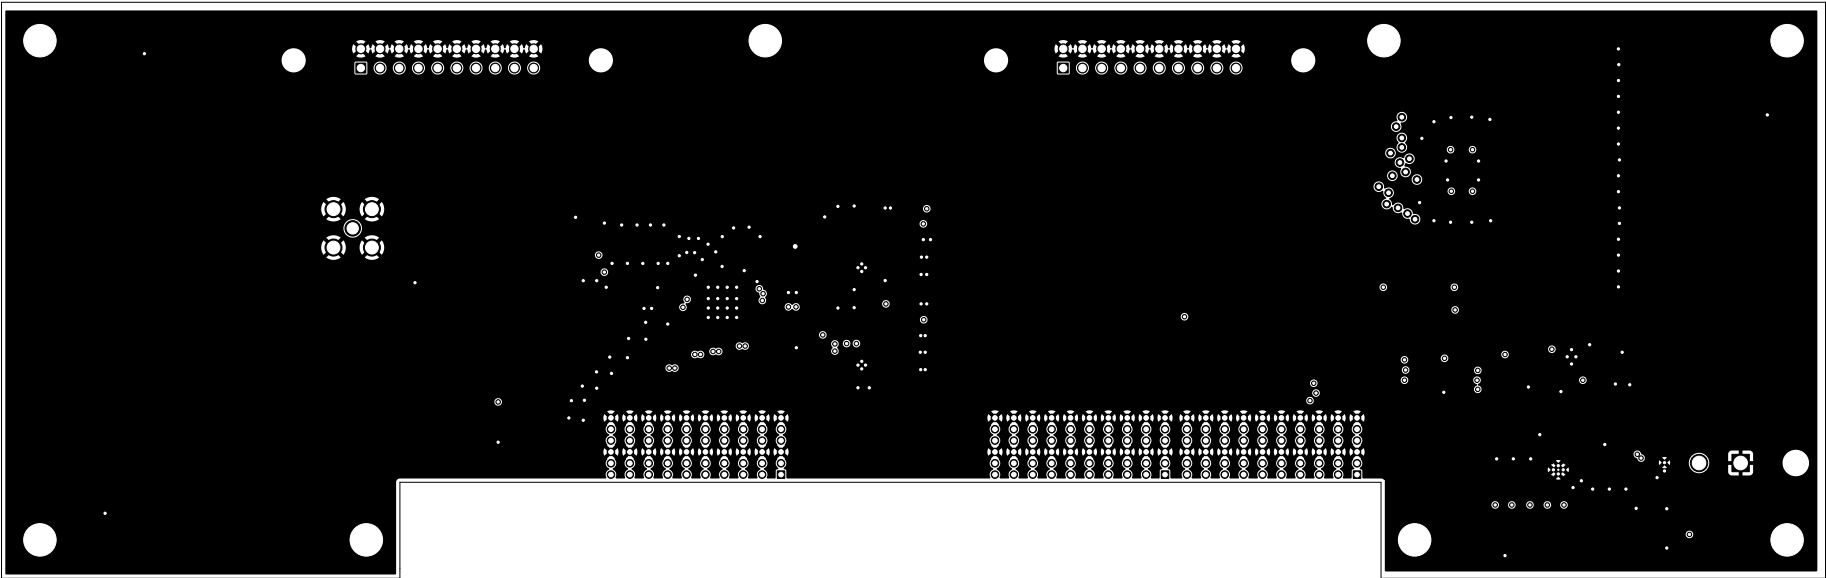


LAYER 2 INTERNAL PLANE
SK-2601-51
REV-1

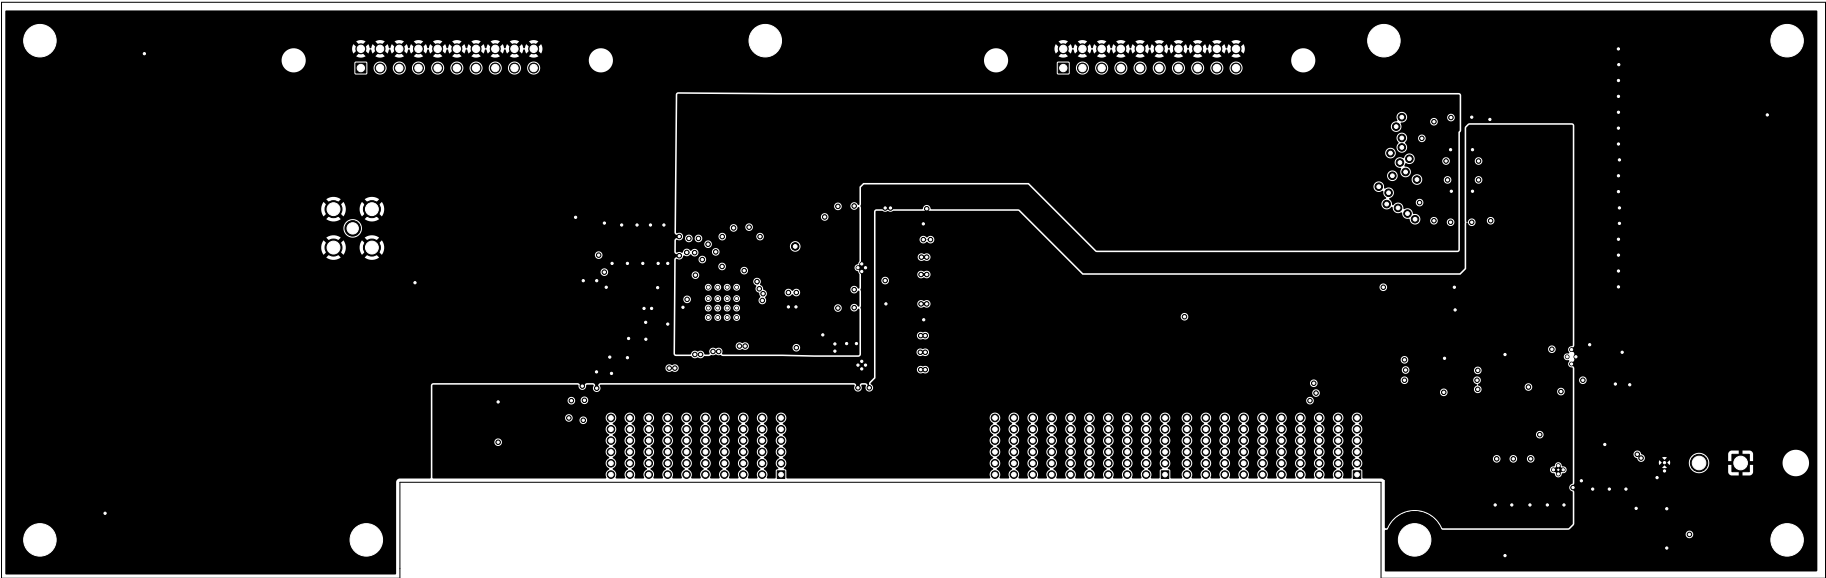


LAYER 3 INTERNAL PLANE
SK-2601-51
REV-1

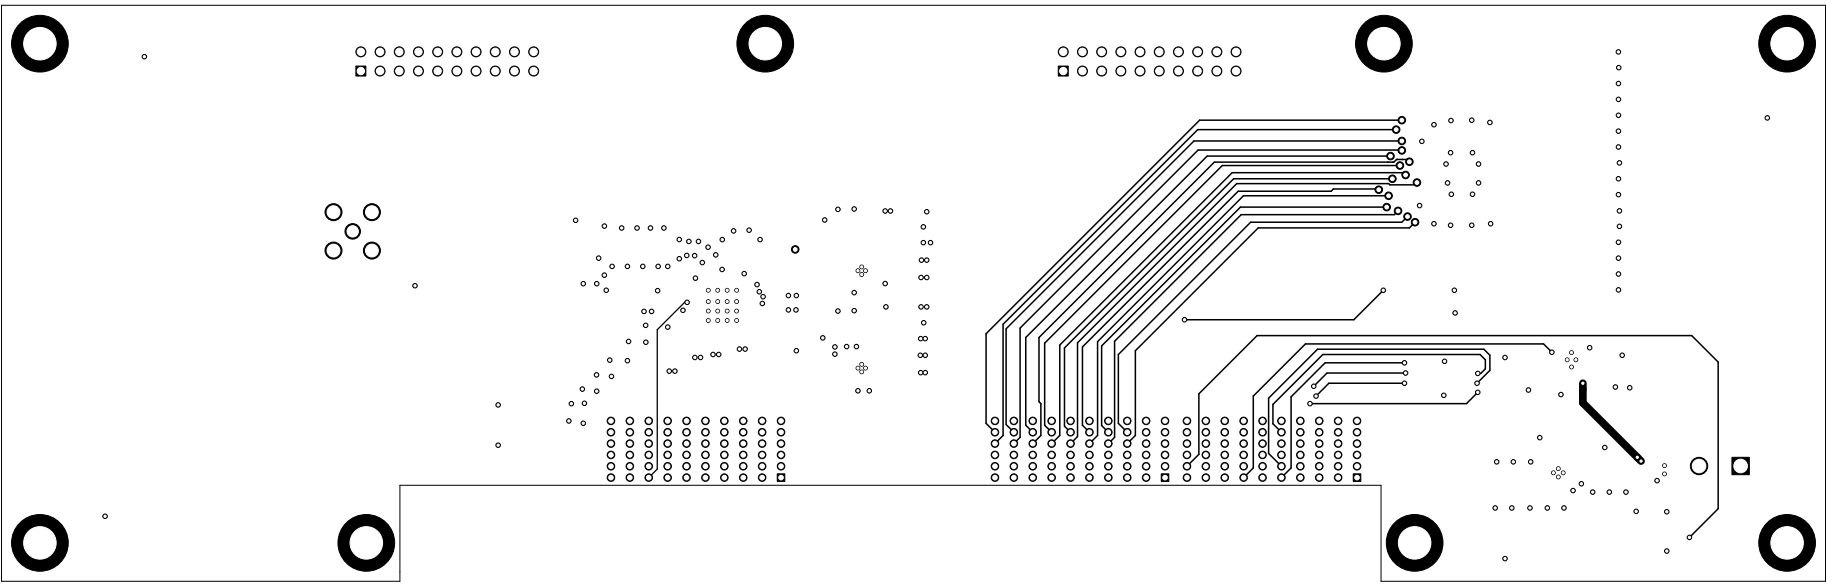


LAYER 4 INTERNAL SIGNAL
SK-2601-51
REV-1

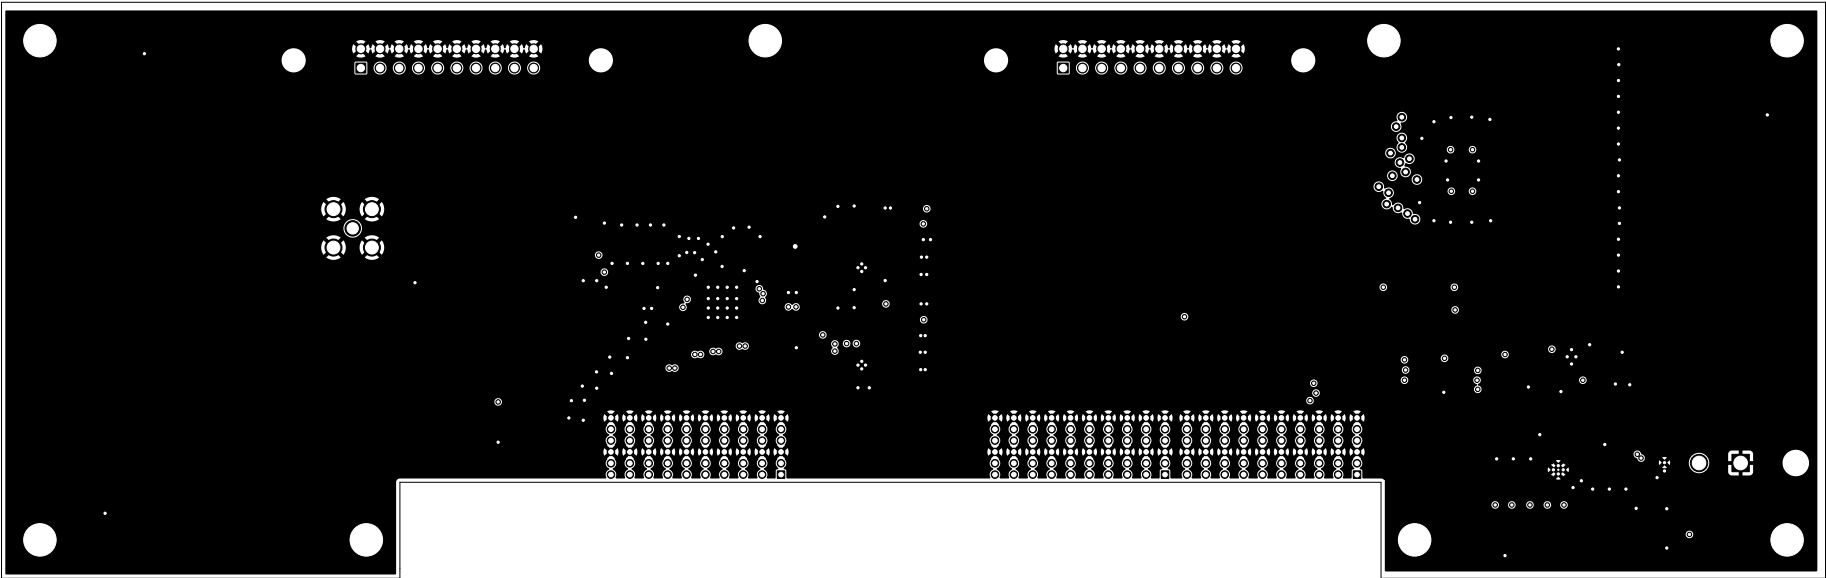

LAYER 5 INTERNAL PLANE
SK-2601-51
REV-1

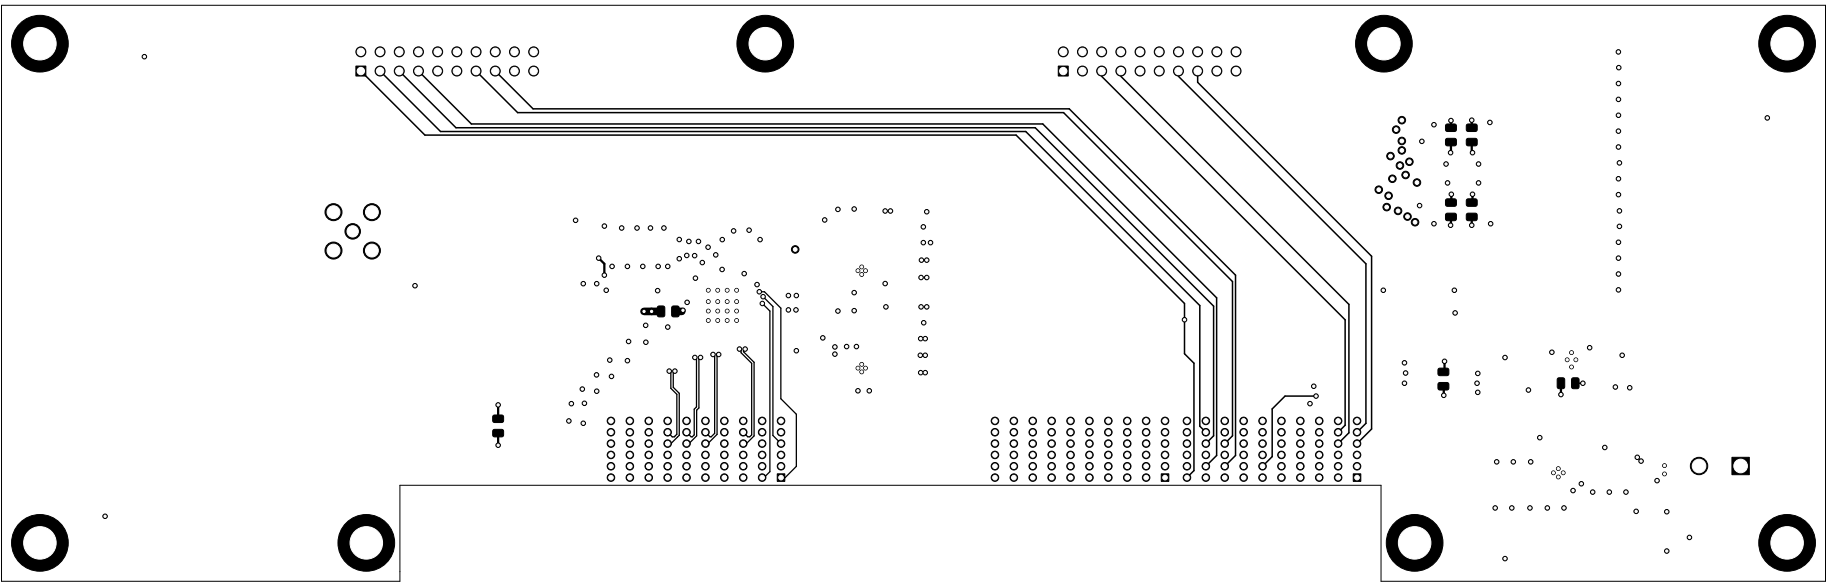


LAYER 6 BOTTOM SIDE
SK-2601-51
REV-1

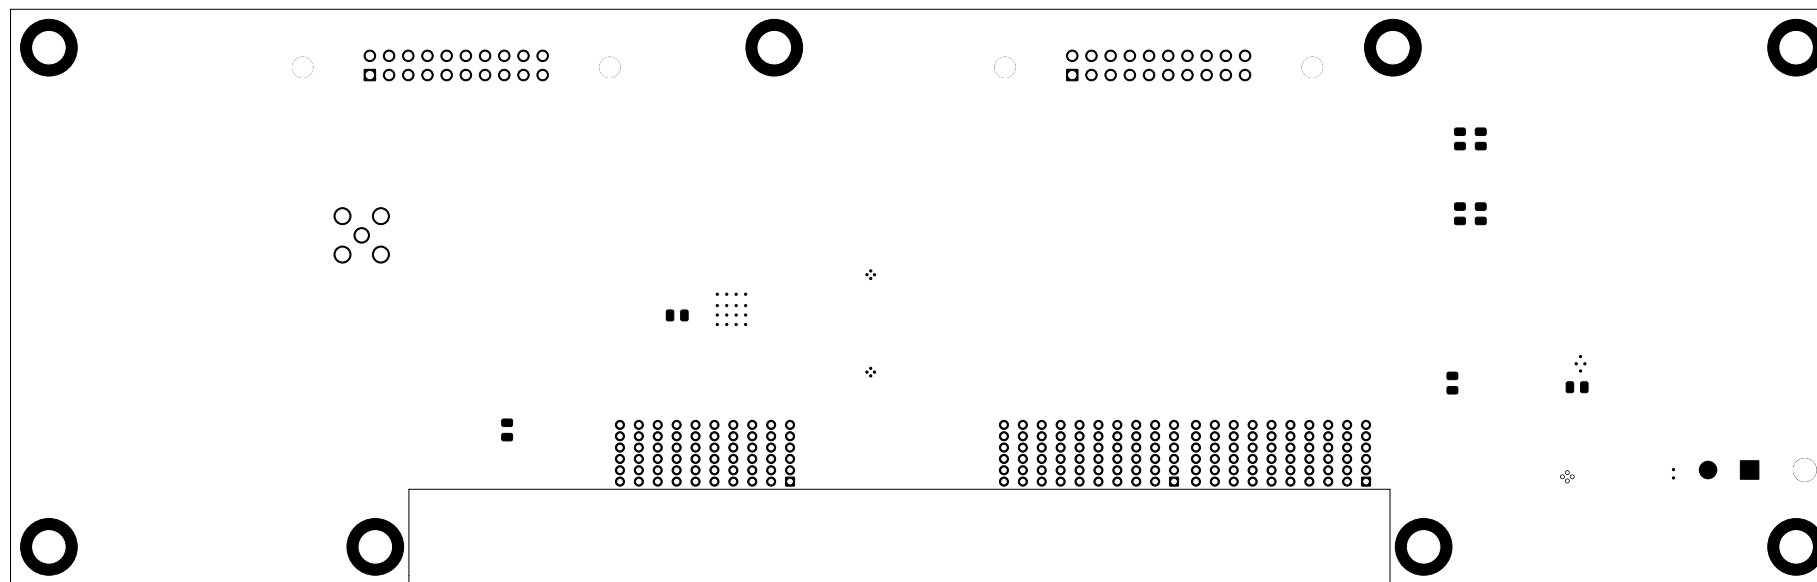

SOLDER MASK BOTTOM

SK-2601-51
REV-1

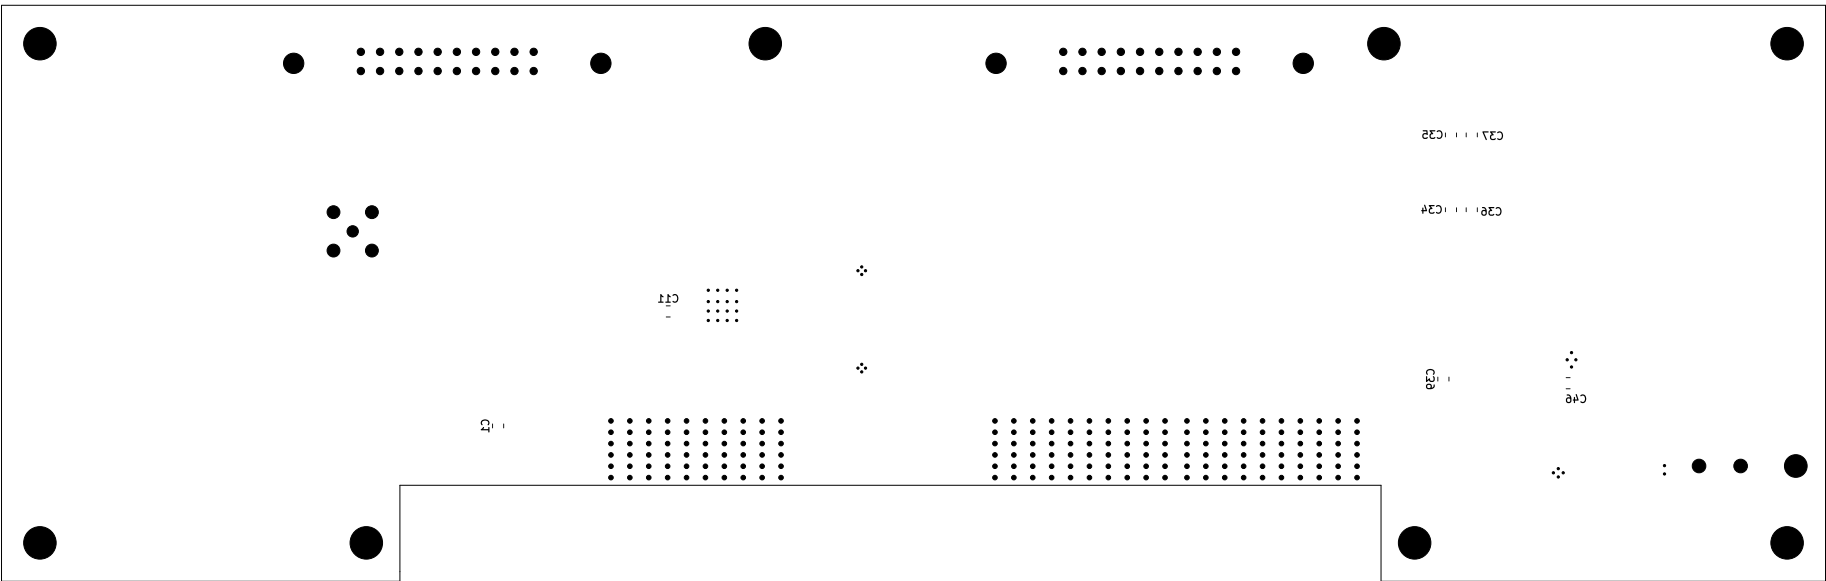

SILKSCREEN BOTTOM
SK-2601-51
REV-1