NESDIS •LAN

Tutorial
·················
How to connect to
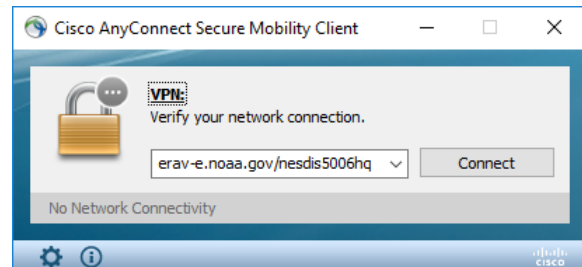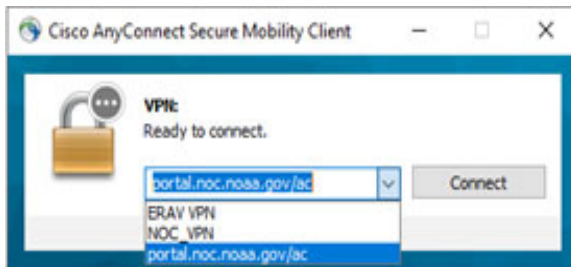ERAV VPN

April
7
2020

Contents

Contents

I.   User Guide for VPN Connection

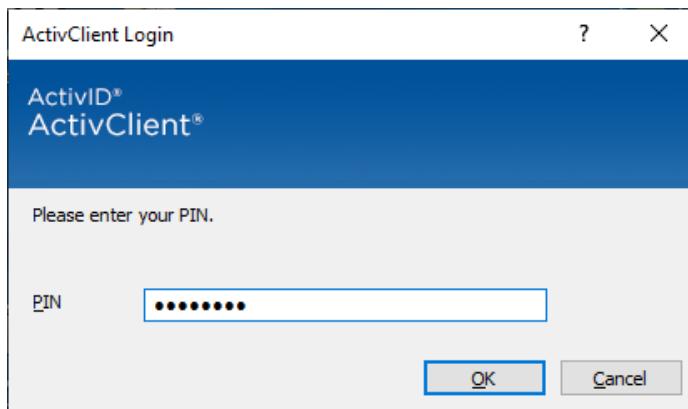User Guide for Connection to new Cisco VPN client

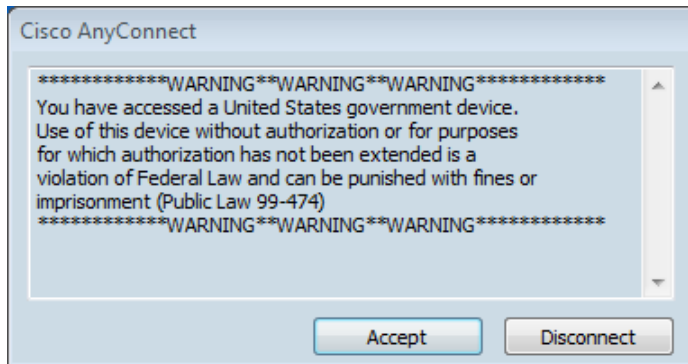1.   Double-click on your Cisco AnyConnect icon, which can be located on your desktop or system tray.

2.   Use the drop-down menu, select 'ERAV VPN', and click "Connect" **or** type in the drop down field 'erav-e.noaa.gov/nesdis5006hq'.
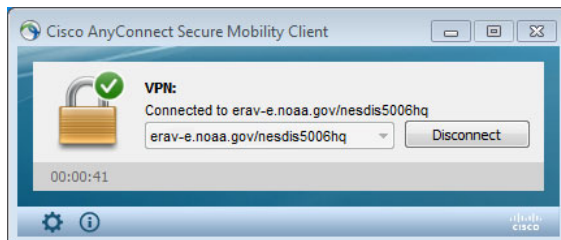
3.   Enter your CAC PIN number.

4. The NOAA warning banner will be displayed, click "Accept" to continue.

5. Once the connection is successful, you will receive a message with a green checkmark and status of "Connected to erav-e.noaa.gov/nesdis5006hq" and the drop down menu will be populated with the URL entry 'erav-e.noaa.gov/nesdis5006hq' as seen below.

6. The connection will be established.