


Fig.130 | 3pc high performance ball valve


Connection:	Thread ends BSPP - ISO228/1 Butt weld ends - WCB: EN12627 CF3M: DIN2463 / SMS3008 / ISO1127
Size range:	Socket weld ends - ASME B16.11 Full bore: ¼" - 2" or DN8 - DN50 Reduce bore: ½" - 2 ½" or DN15 - DN65
Pressure rating:	¼" - 1": FB = 138bar / 2000psi 1 ¼" - 2": FB = 103bar / 1500psi 2 ½": RB = 103bar / 1500psi
Body:	Carbon steel, stainless steel 316
Ball/stem:	Stainless steel 316
Sealing:	PTFE with 25% carbon. PTFE, TFM1600, PEEK available on request
Operating:	Hand lever, pneumatic actuator, electric actuator



CE SIL ISO15848-1 TA-LUFT CE, ATEX, SIL, EU1935/2004, ISO15848-1/TA-LUFT

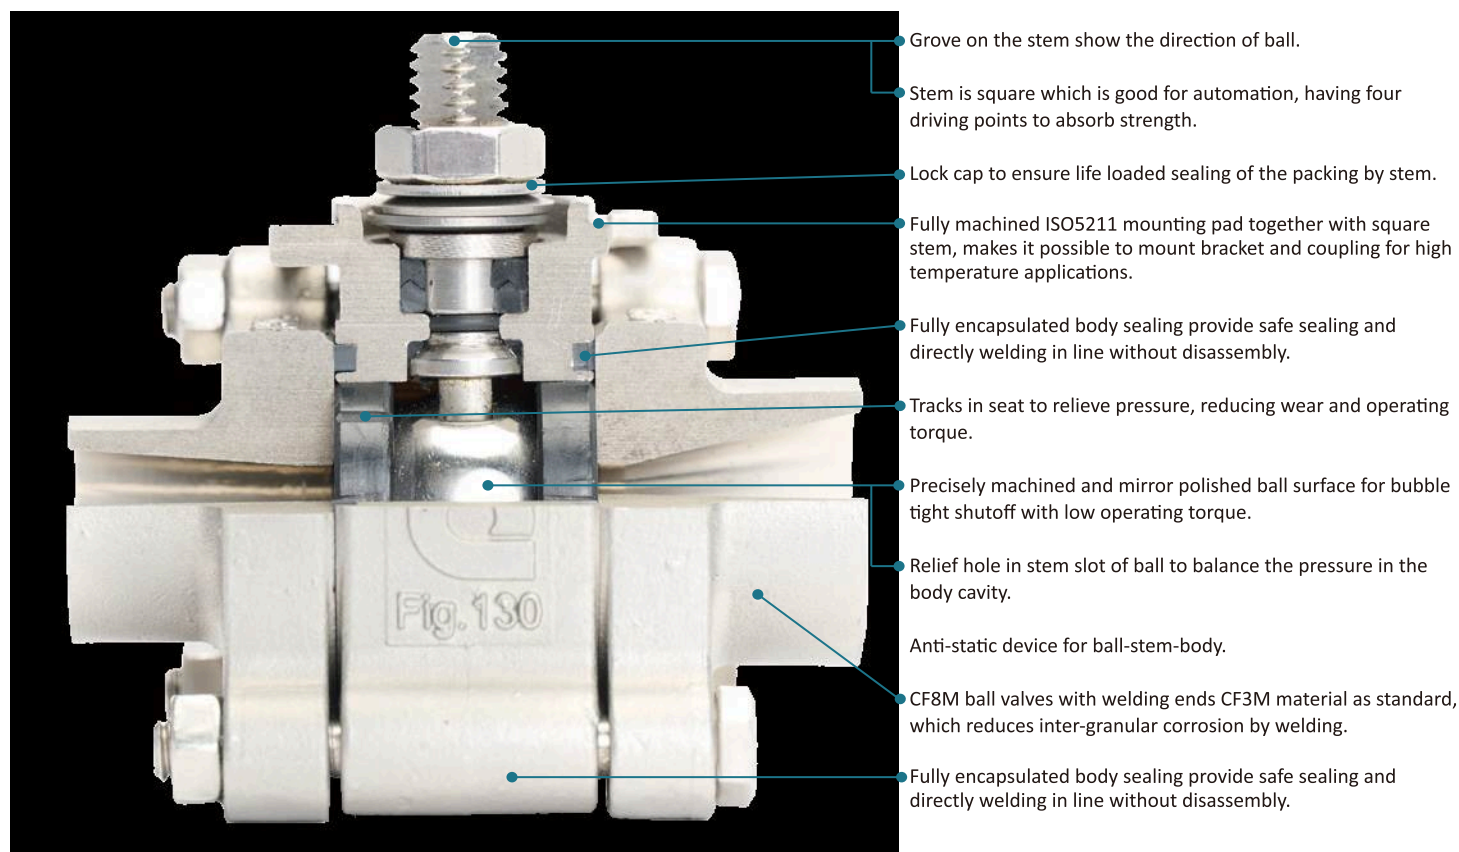

Sealing system

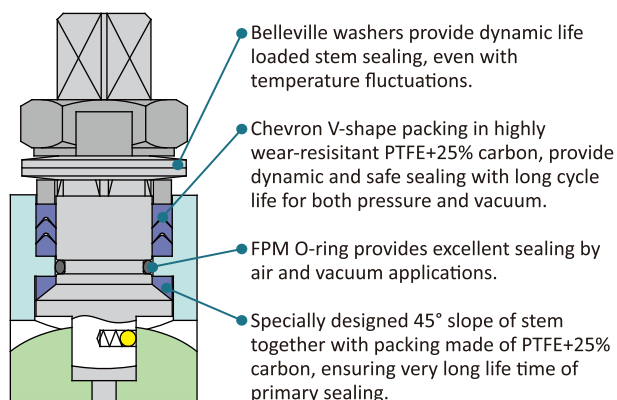

Seat and body sealing


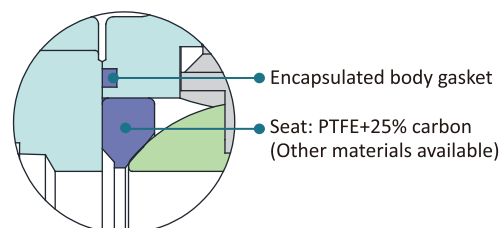


Fig.131 | 3pc high performance ball valve with ISO5211 top flange


Connection:	Thread ends BSPP. Alternative NPT
	Butt weld ends - WCB: EN12627 CF3M: DIN2463 / SMS3008 / ISO1127
Size range:	Flange ends - EN1092, ASME B16.5
	Socket weld ends - ASME B16.11
Pressure rating:	Full bore: ¼" - 4" or DN8 - DN100;
	Reduce bore: ½" - 4" or DN10 - DN100;
Body:	Thread/BW ends ¼" - 1": FB = 138bar / 2000psi
	1 ¼" - 2": FB = 103bar / 1500psi
Ball/stem:	2 ½" - 4": FB = 69bar / 1000psi
	Flange ends DN15 - DN50: PN40/PN16 DN60 - DN100: PN16
Sealing:	Carbon steel, stainless steel 316
	Stainless steel 316
Top flange:	PTFE with 25% carbon. PTFE, TFM1600, PEEK available on request
	ISO5211



CE Ex SIL ISO15848-1 TA-LUFT CE, ATEX, SIL, EU1935/2004, ISO15848-1/TA-LUFT

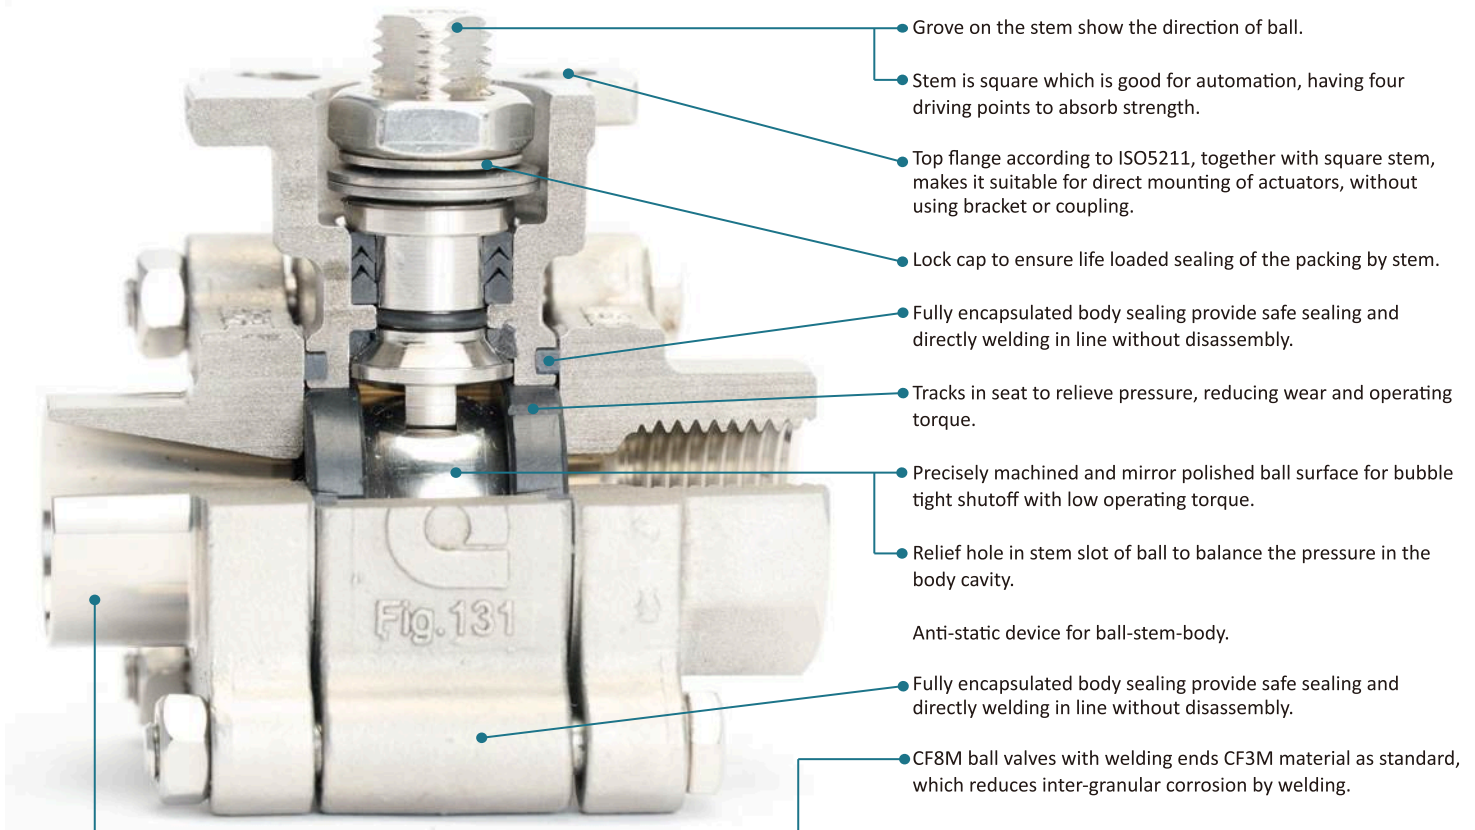

Sealing system

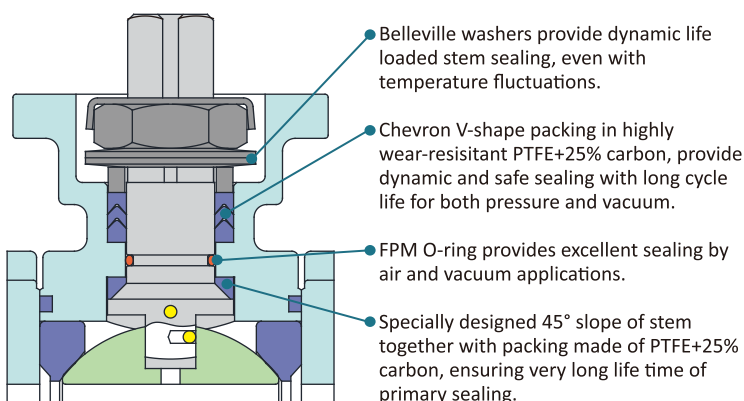

Seat and body sealing

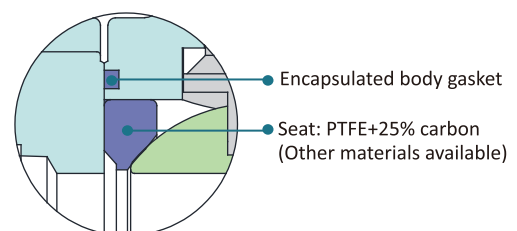


Fig.135 | 3pc ball valve with ISO5211 top flange

Connection:	Thread ends BSPP - ISO228/1
	Butt weld ends - ISO1127, EN12627
	Flanged ends - EN1092-1
Size range:	¼" - 4" or DN8 - DN100
Pressure rating:	Thread/BW ends: ¼" - 2": PN63
	2 ½" - 4": PN40
	Flanged ends: ½" - 2": PN40/PN16
	2 ½" - 4": PN16
Face to face:	Thread/BW ends: DIN3202 M3
	Flanged ends: DIN3202 F1
Body:	Stainless steel, carbon steel
Seat:	PTFE. Other materials available on request
Top flange:	ISO5211

- Pressure relief hole in ball slot.
- Anti-static devices for ball - stem - body.
- Blow-out proof stem.

CE  SIL  CE, ATEX, SIL and EU1935/2004



Fig.150 | 2pc flanged ball valve

Connection:	Flanged ends according to DIN EN1092-1
Size range:	DN15 - DN200
Pressure rating:	DN15 - DN50 PN16/PN40
	DN65 - DN200 PN16 (PN40 available on request)
	* ANSI150/300 available on request.
Face to face:	DN15 - DN100: DIN3202 F4;
	DN125 - DN200: DIN3202 F5
Body:	Stainless steel 316, carbon steel
Seat:	PTFE with 25% carbon. PTFE, TFM1600 available on request
Top flange:	ISO5211

- Anti-static devices for ball - stem - body.
- Blow-out proof stem.
- Pressure relief hole in ball slot.
- Fire safe design.

CE  SIL  CE, ATEX, SIL and EU1935/2004



Fig.151 | 2pc flanged ball valve - F1 long pattern

Connection:	Flanged ends according to DIN EN1092-1
Size range:	DN15 - DN100
Pressure rating:	DN15 - DN50 PN16/PN40
	DN65 - DN100 PN16
Face to face:	DIN3202 F1 / BS EN558-1 R1
Body:	Stainless steel 316, carbon steel
Seat:	PTFE with 25% carbon, PTFE, TFM1600
Top flange:	ISO5211

- Face to face dimension confirms to DIN3202 F1.
- Fire safe design.
- Anti-static devices for ball - stem - body.
- Blow-out proof stem.
- Pressure relief hole in ball slot.

CE  SIL  CE, ATEX, SIL and EU1935/2004

