

***BAF BUTTERFLY VALVES
CATALOGUE***



BAF VALVES



for best *invalvement*

Index

About BAF Valves	3
Certificates	4
BAF Companies	5
BAF Rubberlined Butterfly Valves	7
Features	8
Applications	8
Wafer Type, (ITS) short pattern – PN10 – DN50/2" till DN1200/48"	9
Wafer Type, (ITS) short pattern – PN16 – DN50/2" till DN1200/48"	10
Wafer Type, (ITS) short pattern – 150# – DN50/2" till DN1200/48"	11
Lug Type, (LTS) short pattern – PN10 – DN50/2" till DN1200/48" Tapped holes metric	12
Lug Type, (LTS) short pattern – PN16 – DN50/2" till DN1200/48" Tapped holes metric	13
Lug Type, (LTS) short pattern – 150# – DN50/2" till DN1200/48" Tapped holes UNC	14
Lug Type, (LTS) short pattern – PN10 – DN50/2" till DN1200/48" Drilled Holes	15
Lug Type, (LTS) short pattern – PN16 – DN50/2" till DN1200/48" Drilled holes	16
Lug Type, (LTS) short pattern – 150# – DN50/2" till DN1200/48" Drilled holes	17
Double flanged Type, (FTN) short pattern – PN10 – DN50/2" till DN1200/48"	18
Double flanged Type, (FTN) short pattern – PN16 – DN50/2" till DN1200/48"	19
Double flanged Type, (FTN) short pattern – 150# – DN50/2" till DN1200/48"	20
BAF operating torque for the butterfly valves	21
BAF Cv Values at various disc angles	22


Over the last 35 years BAF Valves has established high engineering and manufacturing standards. The reputation for quality first without compromise has been truly earned and is still highly valued by our organization to secure customer satisfaction. Our facilities are equipped with up to date and professional machinery and our operations are using fully integrated and modern supporting ERP systems. This securing a high level of control over all our process and services. It is our honor and pleasure to serve you as our valued customer.

About BAF Valves

BAF Valves was established in 1972 and is one of the leading manufacturers in Europe producing standard and non-standard butterfly valves, valve spare parts and valve accessories. Our products can be supplied fully custom made to your requirements or just in accordance to international design standards. BAF butterfly valves are exported throughout the world for all kinds of piping applications such as On- and Offshore, Refineries, (Petrol) Chemical Industries, Power Plants, Waterworks, Ships, etc. In case required, we can submit our valve reference list accordingly. It is our aim to be your 'best' partner in solving valve problems.

BAF Valves manufactures valve sizes up to DN2500/100" to any design standard or flange alignment such as DIN / ANSI / BS / JIS / AWWA, etc. Pressure ratings up till PN25. * (larger size/rates available upon request). Furthermore, we have our own design department, machine-shop and test- and repair facilities, which includes the reconditioning and/or modification of any type or brand of butterfly valves. BAF Valves is also your partner for the world wide supply of valve spare parts or engineering services at job sites, when required.

All our butterfly valves, accessories and relevant products are manufactured fully in accordance to our certified Quality Assurance System ISO9001:2000/LRQA certificate nr. 650834.

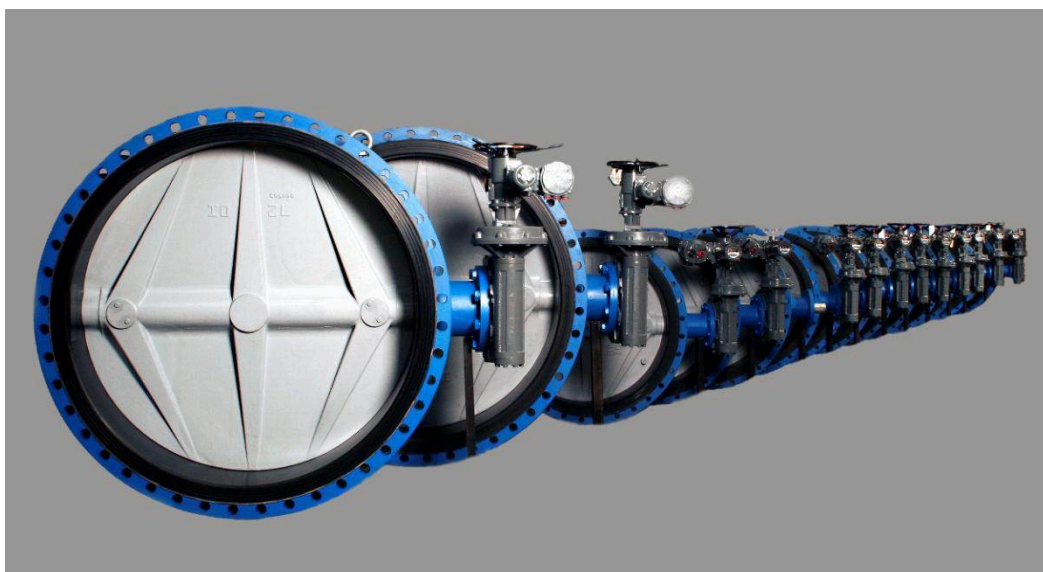

BAF Certificates

- Fire safe cert DN100 till DN200
- Fire safe cert DN200 and larger
- ISO 9001 BAF Valves
- Lloyds type approval Double flanged
- Lloyds type approval Wafer
- PED BAF
- Stoomwezen
- WRAS

All these certificates can be downloaded from our website www.bafvalves.com.




BAF Companies

Head office and production facility:

- **BAF VALVES**
Kanaalstraat 7
4905 BH, Oosterhout
The Netherlands
Phone +31 162 460840
Fax +31 162 460488
Email info@bafvalves.com

Sales offices:

- **BAF Valves Kuwait WLL**
Mina Abualla Industrial Area,
BBlock 5, Area 72A-96
Kuwait
Phone +965 2326 0744
Fax +965 2326 2914
Email info@bafvalves.com
- **BAF Valves Asia Pacific Pte Ltd**
No 21 Bukit Batok Crescent
#06-82 WCEGA Tower
Singapore 658065
+65 6570 0212
+65 6570 0210
Email info@bafvalves.com
- **BAF Valves Hong Kong Ltd**
Aberdeen
Unit 1711-1714
17th Floor Hing Wai
No. 7 Tin Wan
Hong Kong
Email info@bafvalves.com
- **BAF Valves Middle East FZE**
PO Box 50567
Hamriyah Free Zone – Shj
United Arab Emirates
Email info@bafvalves.com
- **BAF Valves Shanghai Co., Ltd**
Rm1811 Far East Building,
No.1101 South Pudong Rd. Pudong
Shanghai 200120
China
Email info@bafvalves.com

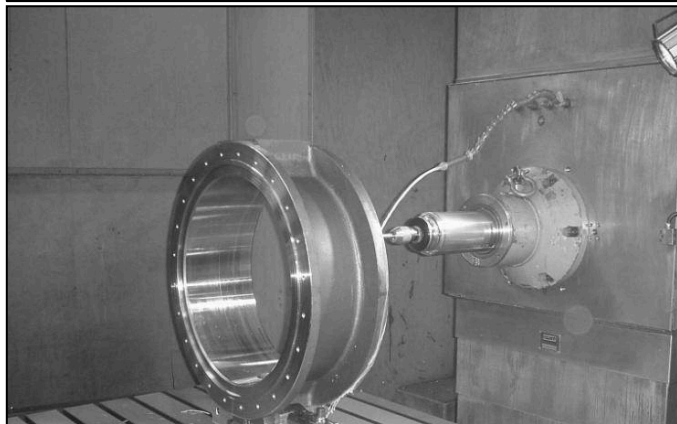




BAF VALVES

Production facility

- **BAF Valves Jiaxing Manufacturing Co. Ltd**

No. 26 Qiangshen Road
Xingcheng Town, Xiuzhou
District, Jiaxing Zhejiang
Province 314015,
China
Email info@bafvalves.com

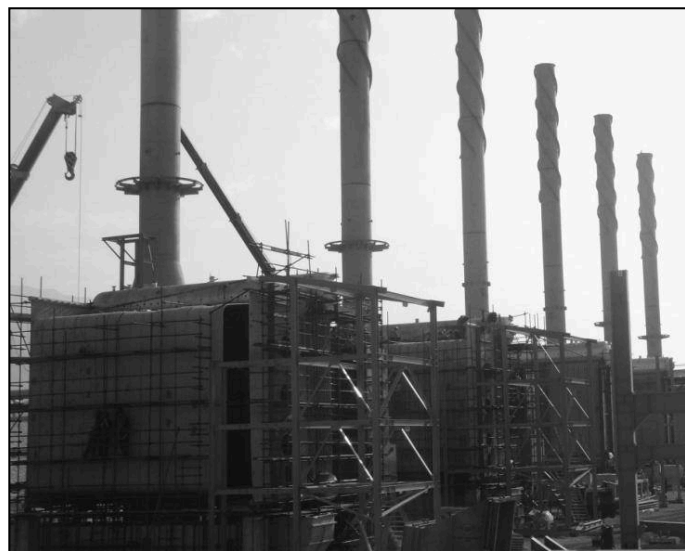

BAF Rubber lined Butterfly Valves

BAF Butterfly Valves are designed to meet various applications in the waterworks, chemical, petrochemical, upstream storage and power industries. BAF design covers resilient type of butterfly valves as well as triple off-set High performance butterfly valves towards the latest international standards and can be supplied in a large variety to body and trim materials.

Design standards :

- ASME B16.34
- API609

Face to Face and end to end dimension conform to :

- API609

Connections :

- End flange dimensions conform to ASME B16.5 / MSS-SP-44

Inspection and test in accordance with :

- API 598
- BS EN 12266-1



Features

- Low maintenance cost
- Bubble tight shut-off
- Reliable operation
- Minimum restriction of flow
- Reduced installation costs
- Minimum of turbulence
- Minimum pressure drip
- Better control


Applications

BAF Valves are used in the following

- Oil-refineries
- Chemical- and petro-chemical plants
- Pharmaceutical plants
- Food and allied processing plants
- Gas-lines
- Power plants
- Water and sewage stations
- Marine and off-shore services
- Steel plants and foundries
- Ventilation and central-heating systems
- Breweries
- Industrial control of engines




Wafer Type, (ITS) short pattern –PN10 – DN50/2" till DN1200/48"

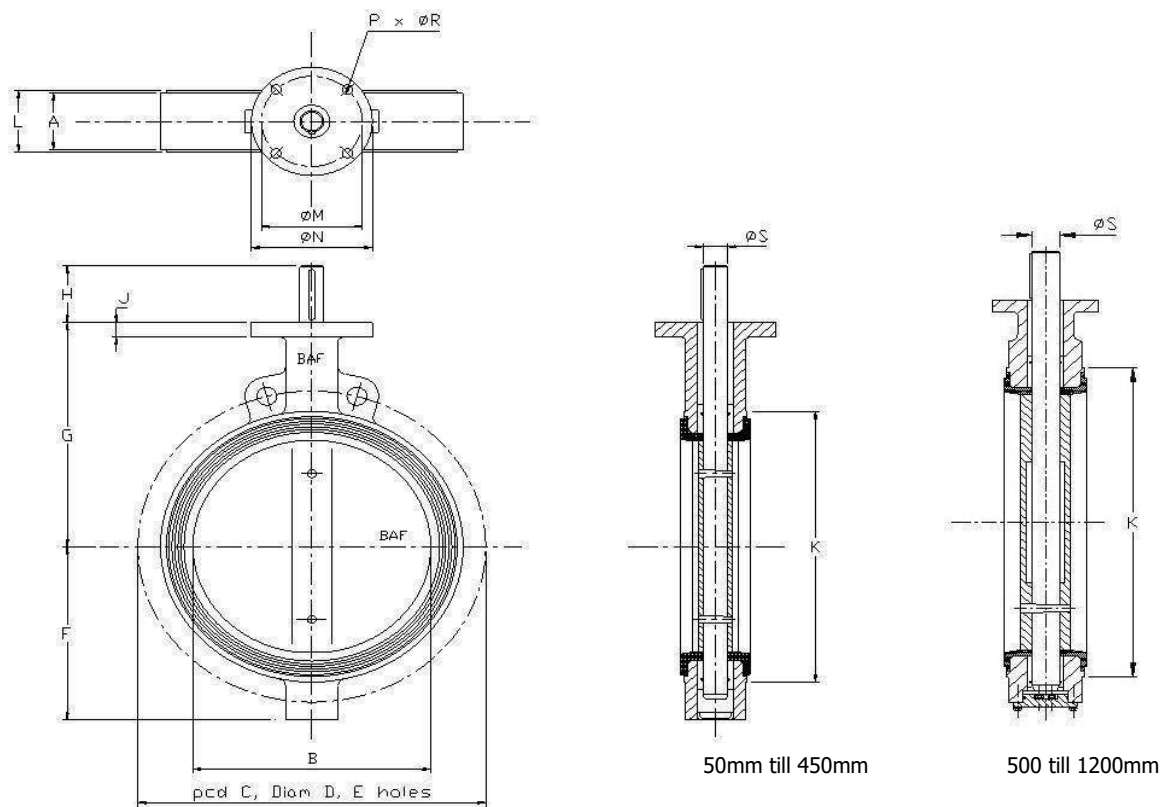


BAF RUBBERLINED BUTTERFLY VALVE WAFER TYPE ITS																				
Flange Connection DIN P10, Design BS5155 / ISO-5752																				
Nominal	F.to.F		Flanges PN10									Topworks						Key		Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size	app. kg
50	43	50	125	18	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30	4
65	46	65	145	18	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30	
80	46	80	160	18	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40	7
100	52	100	180	18	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40	8
125	56	125	210	18	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40	11
150	56	150	240	22	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40	14
175	60	175	270	22	8	165	210	50	18	242	63	F10	102	125	4	12	20	1	6x6x40	
200	60	200	295	22	8	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40	18
250	68	250	350	22	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50	29
300	78	295	400	22	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50	36
350	78	330	460	22	16	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70	63
400	102	380	515	26	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70	85
450	114	425	565	26	20	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100	10
500	127	475	620	26	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80	143
600	154	575	725	30	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100	175
700	229	675	840	30	24	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100	340
800	241	775	950	33	24	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110	425
900	241	875	1050	33	28	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110	505
1000	300	975	1160	36	28	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110	
1200	350	1175	1380	39	32	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110	

Wafer Type, (ITS) short pattern – PN16 – DN50/2" till DN1200/48"

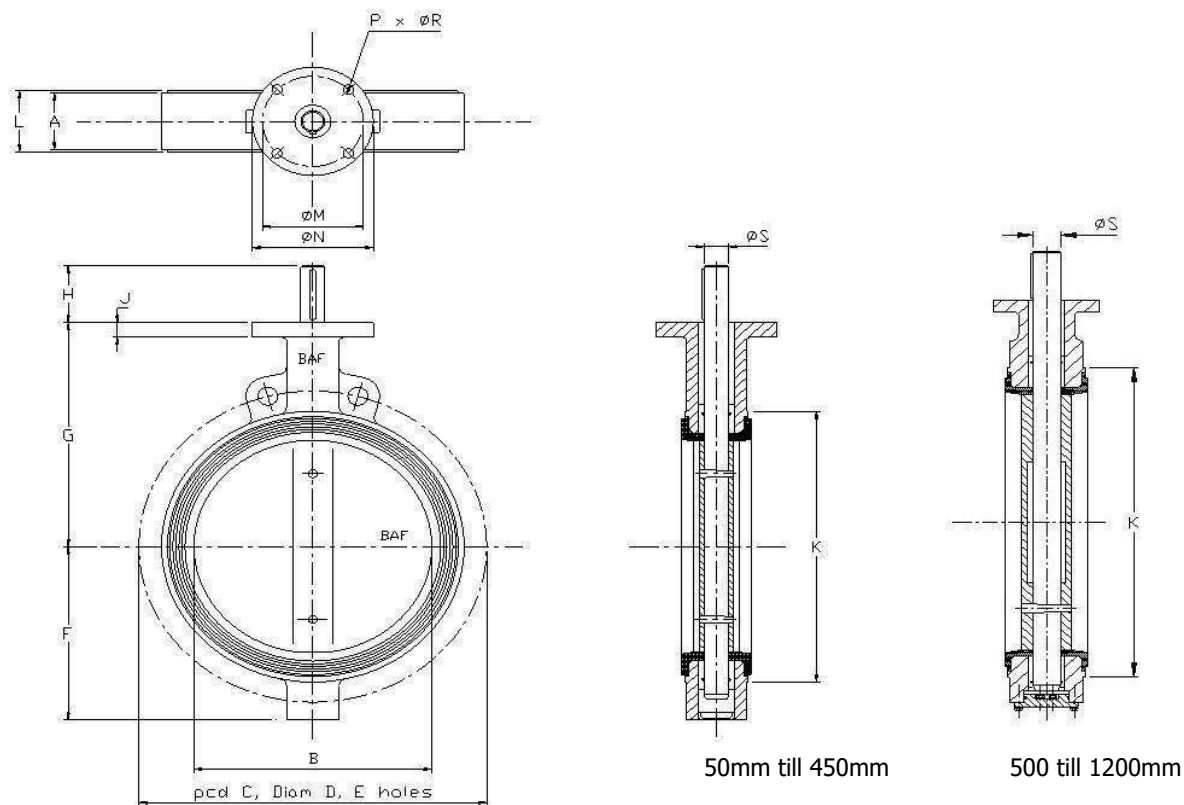


BAF RUBBERLINED BUTTERFLY VALVE WAFER TYPE ITS																			
Flange Connection DIN P16, Design BS5155 / ISO-5752																			
Nominal	F.to.F		Flanges PN16										Topworks					Key	Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size
50	43	50	125	18	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30
65	46	65	145	18	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30
80	46	80	160	18	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40
100	52	100	180	18	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40
125	56	125	210	18	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40
150	56	150	240	22	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40
175	60	175	270	22	8	165	210	50	18	242	63	F10	102	125	4	12	20	1	6x6x40
200	60	200	295	22	12	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40
250	68	250	355	26	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50
300	78	295	410	26	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50
350	78	330	470	26	16	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70
400	102	380	525	30	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70
450	114	425	585	30	20	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100
500	127	475	650	33	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80
600	154	575	770	36	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100
700	229	675	840	36	24	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100
800	241	775	950	39	24	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110
900	241	875	1050	39	28	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110
1000	300	975	1170	42	28	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110
1200	350	1175	1390	48	32	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110

Wafer Type, (ITS) short pattern – 150# – DN50/2" till DN1200/48"

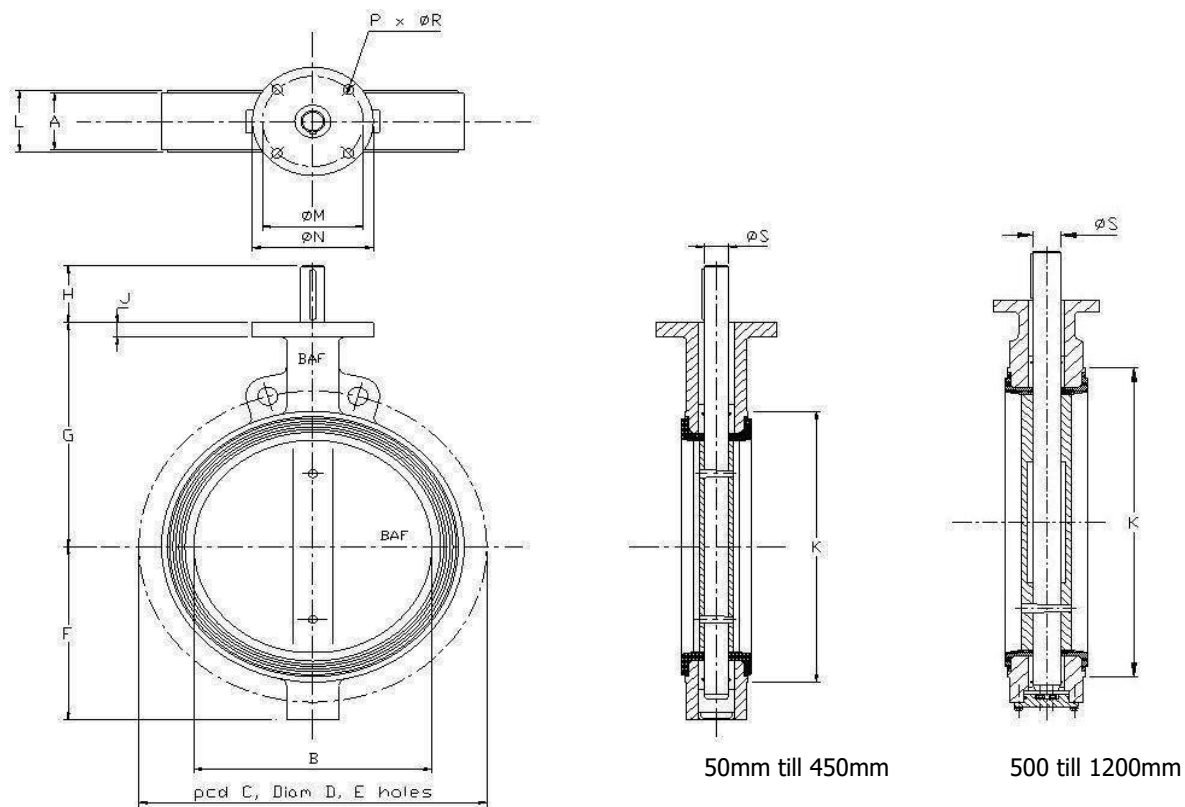



BAF RUBBERLINED BUTTERFLY VALVE WAFER TYPE ITS																			
Flange Connection #150, Design BS5155 / ISO-5752																			
Nominal	F.to.F		Flanges 150#									Topworks						Key	Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size
50	43	50	120,6	19	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30
65	46	65	139,7	19	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30
80	46	80	152,4	19	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40
100	52	100	190,5	19	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40
125	56	125	215,9	22	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40
150	56	150	241,3	22	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40
200	60	200	298,4	22	8	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40
250	68	250	361,9	25	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50
300	78	295	431,8	25	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50
350	78	330	476,2	28	12	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70
400	102	380	539,7	28	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70
450	114	425	577,8	32	16	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100
500	127	475	635	32	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80
600	154	575	749,3	35	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100
700	229	675	863,6	35	28	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100
800	241	775	977,9	41	28	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110
900	241	875	1085,8	41	32	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110
1000	300	975	1200,15	41	36	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110
1200	350	1175	1422,4	41	44	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110

Lug Type, (LTS) short pattern – PN10 – DN50/2" till DN1200/48" Tapped holes metric

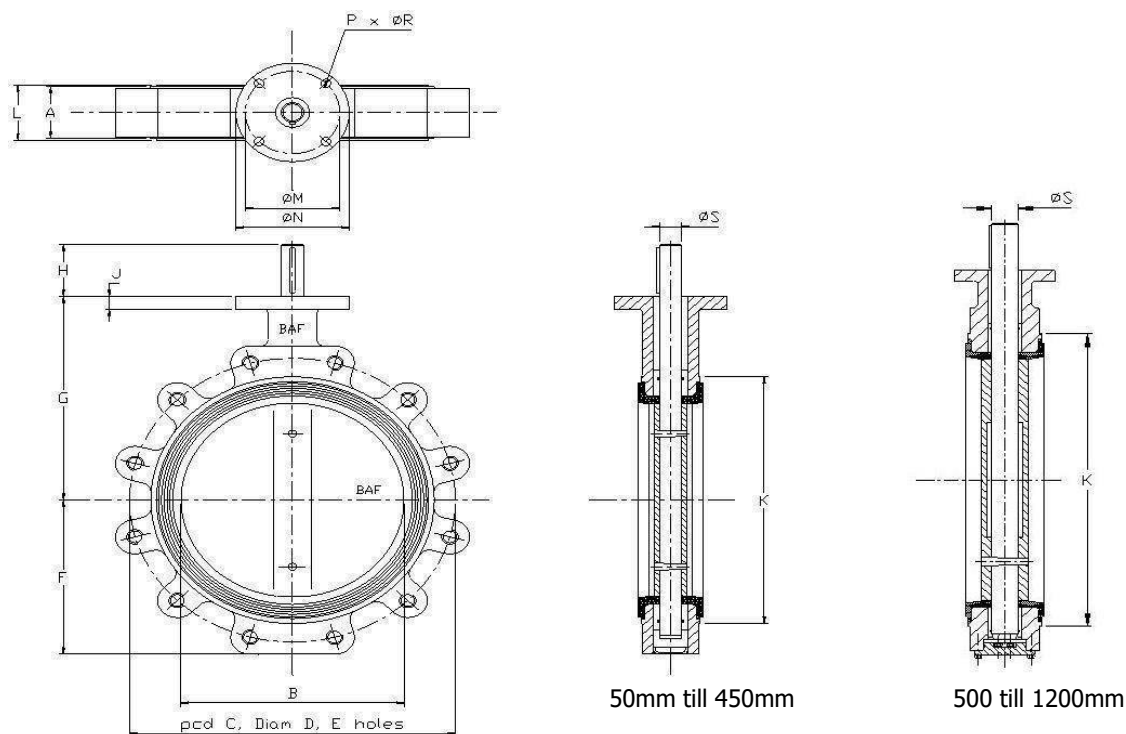


BAF RUBBERLINED BUTTERFLY VALVE LUG TYPE LTS																			
Flange Connection DIN P10, Design BS5155 / ISO-5752, Short Pattern																			
Nominal	F.to.F	Flanges PN10										Topworks							Key
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size
																			app. kg
50	43	50	125	M16	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30
65	46	65	145	M16	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30
80	46	80	160	M16	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40
100	52	100	180	M16	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40
125	56	125	210	M16	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40
150	56	150	240	M20	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40
175	60	175	270	M20	8	165	210	50	18	242	63	F10	102	125	4	12	20	1	6x6x40
200	60	200	295	M20	8	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40
250	68	250	350	M20	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50
300	78	295	400	M20	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50
350	78	330	460	M20	16	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70
400	102	380	515	M24	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70
450	114	425	565	M24	20	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100
500	127	475	620	M24	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80
600	154	575	705	M27	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100
700	229	675	810	M27	24	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100
800	241	775	920	M30	24	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110
900	241	875	1020	M30	24	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110
1000	300	975	1120	M33	28	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110
1200	350	1175	1340	M36	32	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110

Lug Type, (LTS) short pattern – PN16 – DN50/2" till DN1200/48" Tapped holes metric

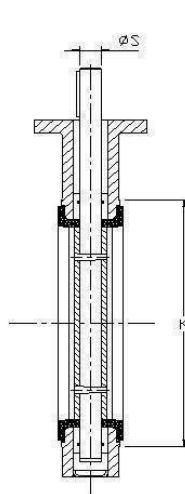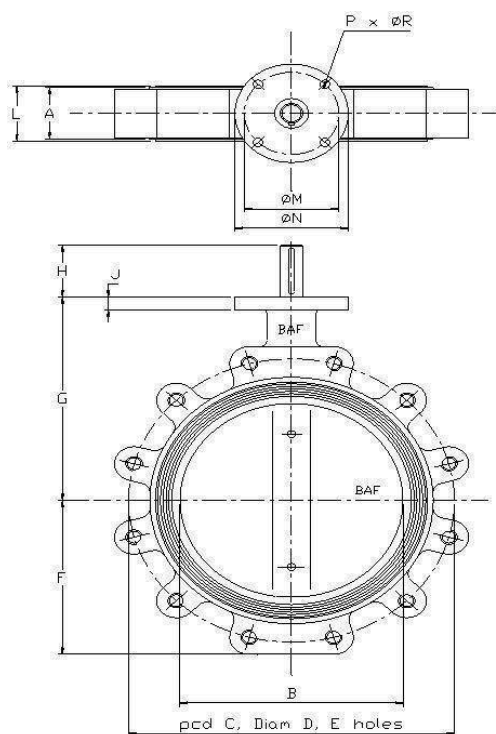

50mm till 450mm

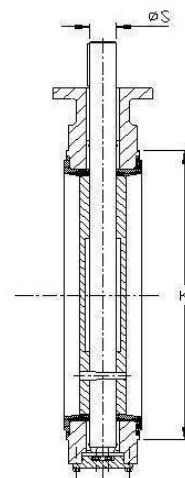

500 till 1200mm


BAF RUBBERLINED BUTTERFLY VALVE LUG TYPE LTS

Flange Connection DIN P16, Design BS5155 / ISO-5752, Short Pattern

Nominal	F.to.F	Flanges PN16										Topworks										Key		Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size	app. kg				
50	43	50	125	M16	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30	5				
65	46	65	145	M16	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30	7				
80	46	80	160	M16	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40	8				
100	52	100	180	M16	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40	10				
125	56	125	210	M16	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40	13				
150	56	150	240	M20	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40	17				
175	60	175	270	M20	8	165	210	50	18	242	63	F10	102	125	4	12	20	1	6x6x40					
200	60	200	295	M20	12	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40	21				
250	68	250	355	M24	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50	34				
300	78	295	410	M24	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50	40				
350	78	330	470	M24	16	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70	74				
400	102	380	525	M27	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70	95				
450	114	425	585	M27	20	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100	129				
500	127	475	650	M30	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80	155				
600	154	575	770	M33	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100	195				
700	229	675	840	M33	24	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100	360				
800	241	775	950	M36	24	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110	455				
900	241	875	1050	M36	28	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110	535				
1000	300	975	1170	M39	28	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110					
1200	350	1175	1390	M45	32	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110					




Lug Type, (LTS) short pattern – 150# – DN50/2" till DN1200/48" Tapped holes UNC

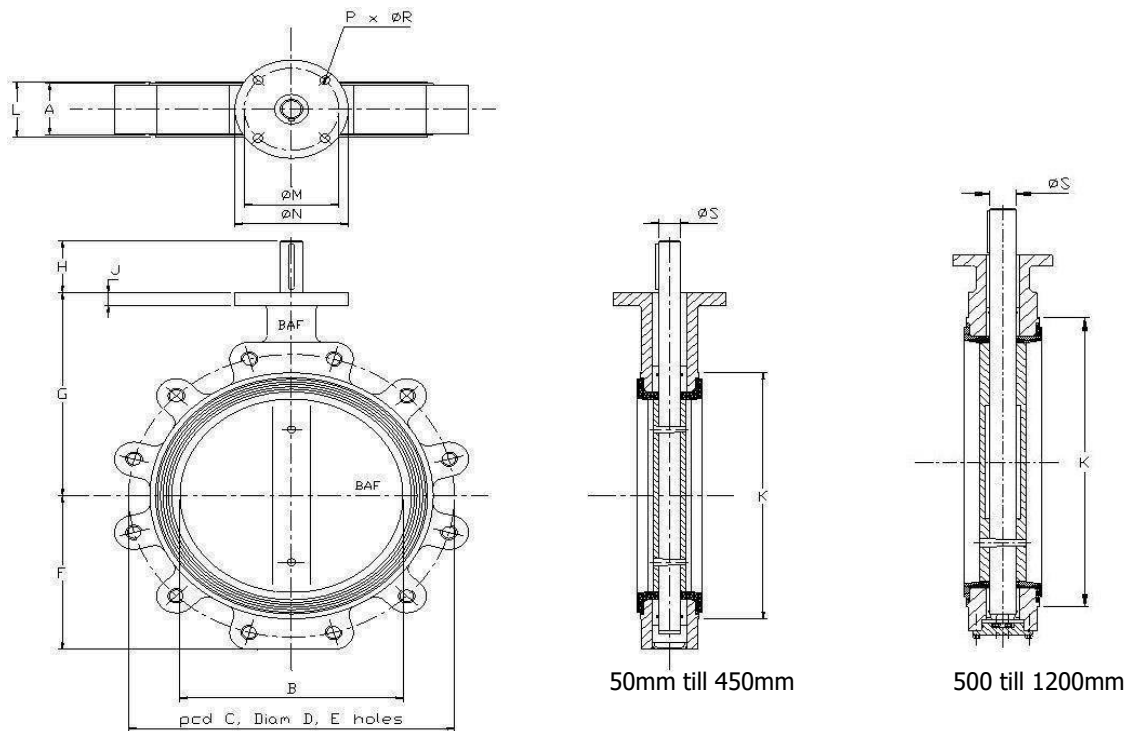


BAF RUBBERLINED BUTTERFLY VALVE LUG TYPE LTS																				
Flange Connection #150, Design BS5155 / ISO-5752, Short Pattern																				
Nominal	F.to.F	Flanges 150#										Topworks						Key		Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size	app. kg
50	43	50	120,6	5/8	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30	5
65	46	65	139,7	5/8	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30	7
80	46	80	152,4	5/8	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40	8
100	52	100	190,5	5/8	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40	10
125	56	125	215,9	3/4	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40	13
150	56	150	241,3	3/4	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40	17
200	60	200	298,4	3/4	12	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40	
250	68	250	361,9	7/8	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50	21
300	78	295	431,8	7/8	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50	34
350	78	330	476,2	1	16	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70	40
400	102	380	539,7	1	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70	74
450	114	425	577,8	1.1/8	20	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100	95
500	127	475	584,2	1.1/8	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80	155
600	154	575	692,1	1.1/4	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100	195
700	229	675	863,6	1.1/4	28	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100	360
800	241	775	977,9	1.1/2	28	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110	455
900	241	875	1085,8	1.1/2	32	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110	535
1000	300	975	1200,2	1.1/2	36	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110	
1100	254	1075	1314,5	1.1/2	40	740	805	120	30	1215	254	F30	298	350	8	22	90	2	25x14x110	
1200	350	1175	1422,4	1.1/2	44	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110	

Lug Type, (LTS) short pattern – PN10 – DN50/2" till DN1200/48" Drilled Holes

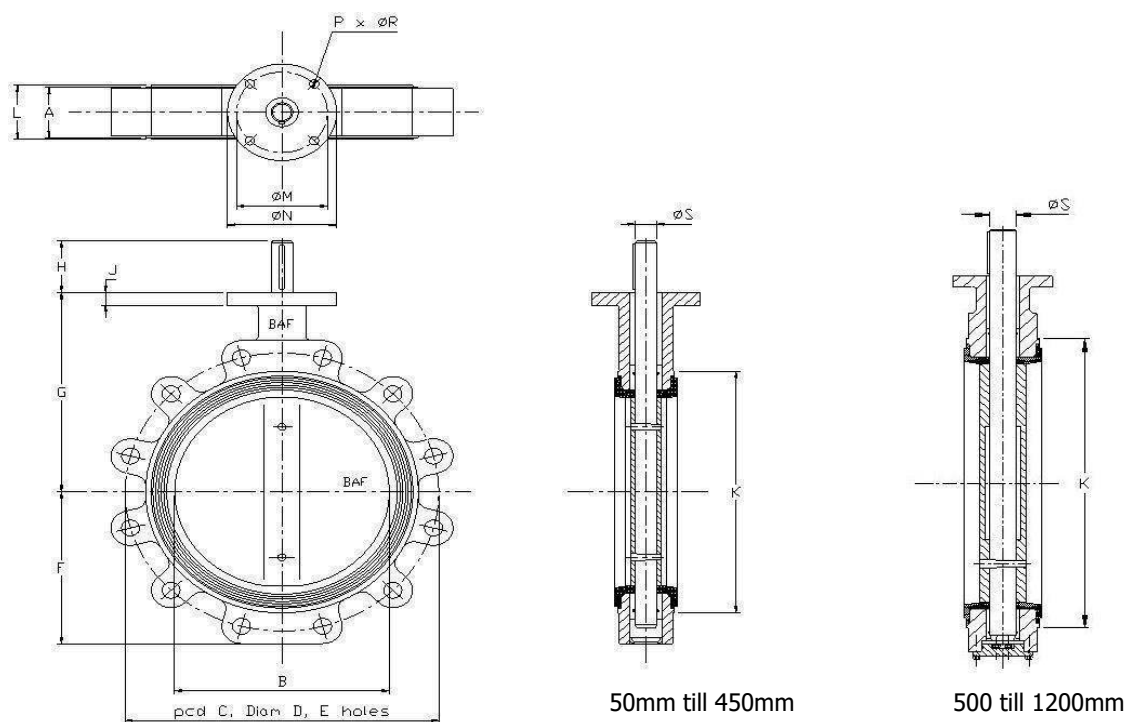



BAF RUBBERLINED BUTTERFLY VALVE LUG TYPE LTS																				
Flange Connection DIN P10, Design BS5155 / ISO-5752, Short Pattern																				
Nominal	F.to.F		Flanges PN10									Topworks						Key		Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size	app. kg
50	43	50	125	18	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30	5
65	46	65	145	18	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30	7
80	46	80	160	18	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40	8
100	52	100	180	18	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40	10
125	56	125	210	18	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40	13
150	56	150	240	22	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40	17
175	60	175	270	22	8	165	210	50	18	242	63	F10	102	125	4	12	20	1	6x6x40	
200	60	200	295	22	8	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40	21
250	68	250	350	22	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50	34
300	78	295	400	22	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50	40
350	78	330	460	22	16	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70	74
400	102	380	515	26	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70	95
450	114	425	565	26	20	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100	129
500	127	475	620	26	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80	155
600	154	575	725	30	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100	195
700	229	675	840	30	24	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100	360
800	241	775	950	33	24	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110	455
900	241	875	1050	33	28	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110	535
1000	300	975	1160	36	28	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110	
1200	350	1175	1380	39	32	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110	

Lug Type, (LTS) short pattern – PN16 – DN50/2" till DN1200/48" Drilled holes

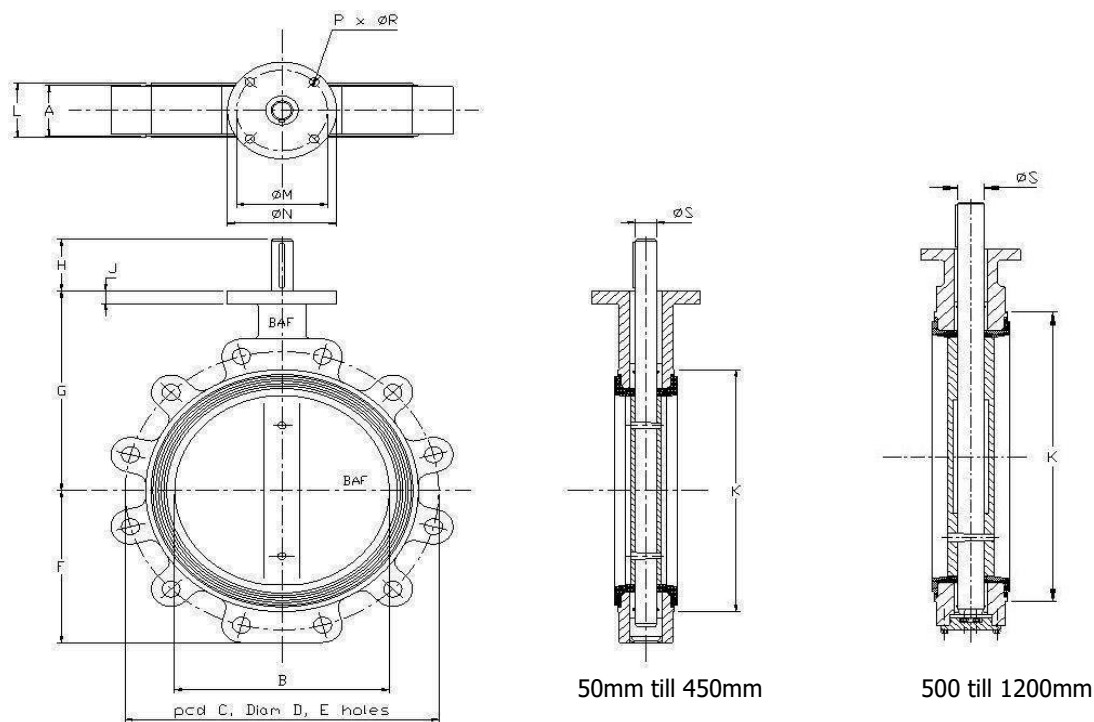


BAF RUBBERLINED BUTTERFLY VALVE LUG TYPE LTS																				
Flange Connection DIN P16, Design BS5155 / ISO-5752, Short Pattern																				
Nominal	F.to.F		Flanges PN16									Topworks						Key		Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size	app. kg
50	43	50	125	18	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30	5
65	46	65	145	18	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30	7
80	46	80	160	18	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40	8
100	52	100	180	18	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40	10
125	56	125	210	18	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40	13
150	56	150	240	22	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40	17
175	60	175	270	22	8	165	210	50	18	242	63	F10	102	125	4	12	20	1	6x6x40	
200	60	200	295	22	12	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40	21
250	68	250	355	26	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50	34
300	78	295	410	26	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50	40
350	78	330	470	26	16	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70	74
400	102	380	525	30	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70	95
450	114	425	585	30	20	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100	129
500	127	475	650	33	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80	155
600	154	575	770	36	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100	195
700	229	675	840	36	24	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100	360
800	241	775	950	39	24	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110	455
900	241	875	1050	39	28	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110	535
1000	300	975	1170	42	28	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110	
1200	350	1175	1390	48	32	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110	

Lug Type, (LTS) short pattern – 150# – DN50/2" till DN1200/48" Drilled holes

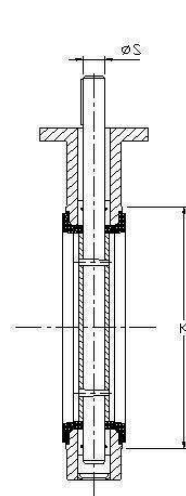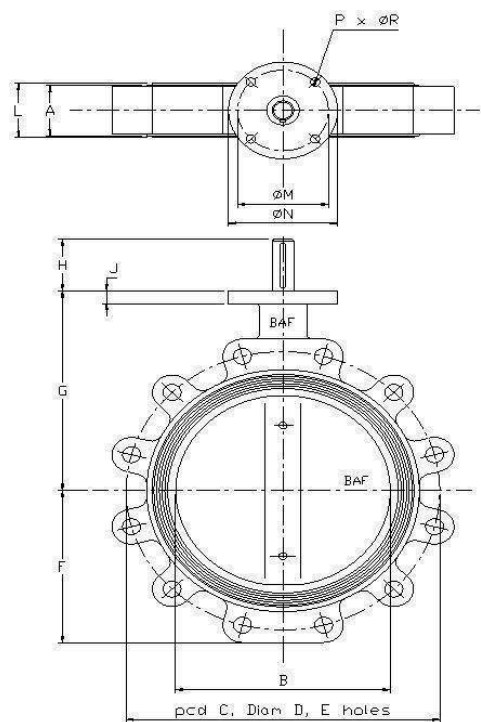

50mm till 450mm

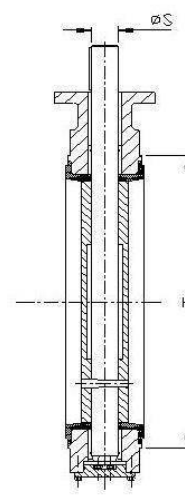

500 till 1200mm


BAF RUBBERLINED BUTTERFLY VALVE LUG TYPE LTS

Flange Connection #150, Design BS5155 / ISO-5752, Short Pattern

Nominal	F.to.F		Flanges 150#									Topworks						Key		Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size	app. kg
50	43	50	120,6	19	4	80	120	40	15	100	46	F07	70	110	4	9	10	1	3x3x30	5
65	46	65	139,7	19	4	90	140	40	18	120	49	F07	70	110	4	9	12	1	3x3x30	7
80	46	80	152,4	19	4	100	160	50	18	130	49	F07	70	110	4	9	12	1	5x5x40	8
100	52	100	190,5	19	8	115	175	50	18	160	55	F07	70	110	4	9	16	1	5x5x40	10
125	56	125	215,9	22	8	125	185	50	18	190	59	F10	102	125	4	12	20	1	6x6x40	13
150	56	150	241,3	22	8	145	195	50	18	215	59	F10	102	125	4	12	20	1	6x6x40	17
200	60	200	298,4	22	8	165	225	50	18	270	63	F10	102	125	4	12	20	1	6x6x40	21
250	68	250	361,9	25	12	210	270	60	20	325	71	F12	125	150	4	14	25	1	8x7x50	34
300	78	295	431,8	25	12	245	310	60	20	375	81	F12	125	150	4	14	30	1	8x7x50	40
350	78	330	476,2	28	12	270	335	80	20	435	81	F14	140	175	4	18	35	1	10x8x70	74
400	102	380	539,7	28	16	305	365	80	22	485	105	F14	140	175	4	18	40	1	12x8x70	95
450	114	425	577,8	32	16	320	385	105	22	535	117	F16	165	210	4	22	40	1	12x8x100	129
500	127	475	635	32	20	365	450	90	25	670	130	F16	165	210	4	22	45	1	14x9x80	155
600	154	575	749,3	35	20	420	495	110	25	685	157	F16	165	210	4	22	55	1	16x10x100	195
700	229	675	863,6	35	28	480	540	110	30	800	232	F16	165	210	4	22	70	1	20x12x100	360
800	241	775	977,9	41	28	535	620	120	30	905	244	F25	254	300	8	18	80	1	22x14x110	455
900	241	875	1085,8	41	32	635	660	120	30	1005	244	F25	254	300	8	18	80	2	22x14x110	535
1000	300	975	1200,15	41	36	700	725	120	30	1110	303	F30	298	350	8	22	90	2	25x14x110	
1200	350	1175	1422,4	41	44	790	855	120	30	1330	353	F30	298	350	8	22	100	2	28x16x110	



Double flanged Type, (FTN) short pattern – PN10 – DN50/2" till DN1200/48"

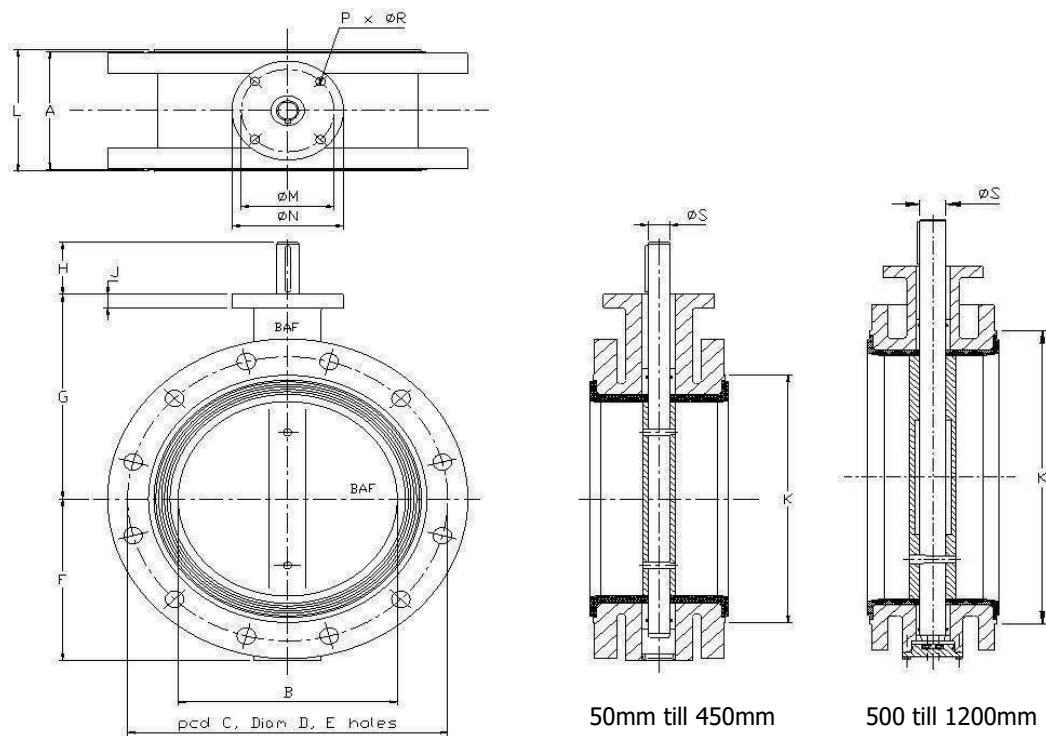

50mm till 450mm


500 till 1200mm

BAF RUBBERLINED BUTTERFLY VALVE, DOUBLE FLANGED FTN

Flange Connection DIN P10, Design BS5155 / ISO-5752 Short pattern


	F.to.F		Flanges PN10									Topworks					Key		Weight	
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size	app. kg
50	108	50	125	18	4	80	120	40	15	100	111	F07	70	110	4	9	10	1	3x3x30	12
65	112	65	145	18	4	90	140	40	18	120	115	F07	70	110	4	9	12	1	3x3x30	13
80	114	80	160	18	4	100	160	50	18	130	117	F07	70	110	4	9	12	1	5x5x40	14
100	127	100	180	18	8	115	175	50	18	160	130	F07	70	110	4	9	16	1	5x5x40	17
125	140	125	210	18	8	125	185	50	18	190	143	F10	102	125	4	12	20	1	6x6x40	19
150	140	150	240	22	8	145	195	50	18	215	143	F10	102	125	4	12	20	1	6x6x40	28
175	152	175	270	22	8	165	210	50	18	242	155	F10	102	125	4	12	20	1	6x6x40	31
200	152	200	295	22	8	165	225	50	18	270	155	F10	102	125	4	12	20	1	6x6x40	36
250	165	250	350	22	12	210	270	60	20	325	168	F12	125	150	4	14	25	1	8x7x50	52
300	178	295	400	22	12	245	310	60	20	375	181	F12	125	150	4	14	30	1	8x7x50	76
350	190	330	460	22	16	270	335	80	20	435	193	F14	140	175	4	18	35	1	10x8x70	86
400	216	380	515	26	16	305	365	80	22	485	219	F14	140	175	4	18	40	1	12x8x70	137
450	222	425	565	26	20	320	385	105	22	535	225	F16	165	210	4	22	40	1	12x8x100	200
500	229	475	620	26	20	365	450	90	25	670	232	F16	165	210	4	22	45	1	14x9x80	200
600	267	575	725	30	20	420	495	110	25	685	270	F16	165	210	4	22	55	1	16x10x100	300
700	292	675	840	30	24	480	540	110	30	800	295	F16	165	210	4	22	70	1	20x12x100	420
800	318	775	950	33	24	535	620	120	30	905	321	F25	254	300	8	18	80	1	22x14x110	650
900	330	875	1050	33	28	635	660	120	30	1005	333	F25	254	300	8	18	80	2	22x14x110	900
1000	410	975	1160	36	28	700	725	120	30	1110	413	F30	298	350	8	22	90	2	25x14x110	1040
1200	470	1175	1380	39	32	790	855	120	30	1330	473	F30	298	350	8	22	100	2	28x16x110	2000

Double flanged Type, (FTN) short pattern – PN16 – DN50/2" till DN1200/48"

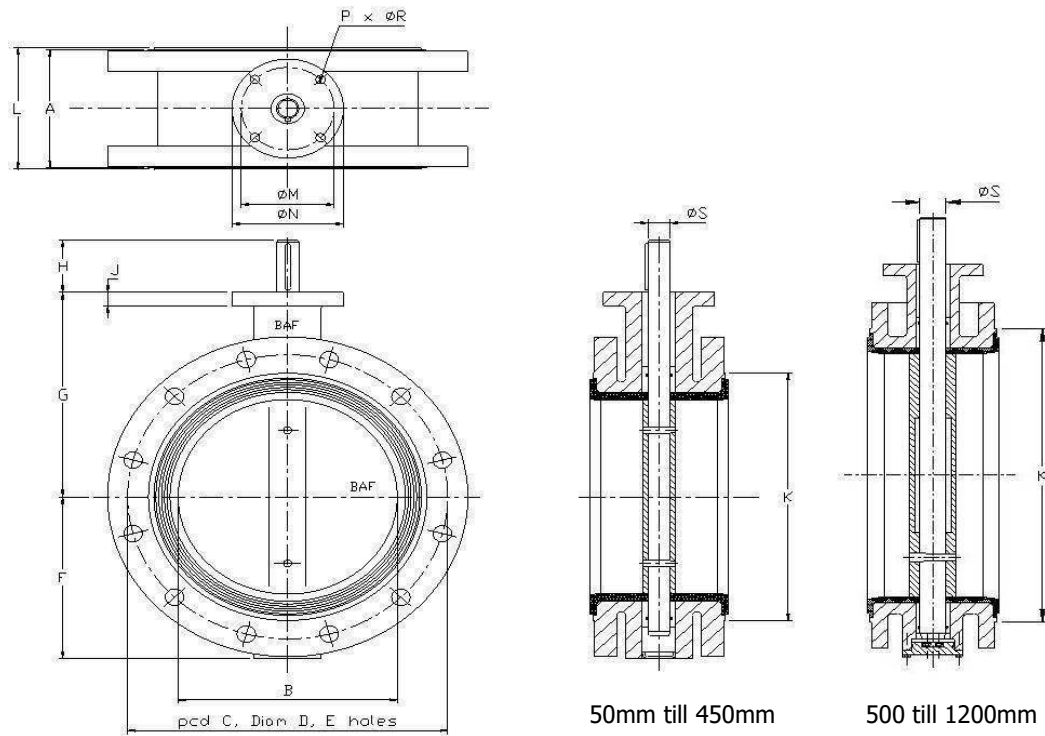

BAF RUBBERLINED BUTTERFLY VALVE, DOUBLE FLANGED FTN																			
Flange Connection DIN P16, Design BS5155 / ISO-5752 Short pattern																			
Nominal	F.to.F	Flanges PN16										Topworks							
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Weight
50	108	50	125	18	4	80	120	40	15	100	111	F07	70	110	4	9	10	1	3x3x30
65	112	65	145	18	4	90	140	40	18	120	115	F07	70	110	4	9	12	1	3x3x30
80	114	80	160	18	4	100	160	50	18	130	117	F07	70	110	4	9	12	1	5x5x40
100	127	100	180	18	8	115	175	50	18	160	130	F07	70	110	4	9	16	1	5x5x40
125	140	125	210	18	8	125	185	50	18	190	143	F10	102	125	4	12	20	1	6x6x40
150	140	150	240	22	8	145	195	50	18	215	143	F10	102	125	4	12	20	1	6x6x40
175	152	175	270	22	8	165	210	50	18	242	155	F10	102	125	4	12	20	1	6x6x40
200	152	200	295	22	12	165	225	50	18	270	155	F10	102	125	4	12	20	1	6x6x40
250	165	250	355	26	12	210	270	60	20	325	168	F12	125	150	4	14	25	1	8x7x50
300	178	295	410	26	12	245	310	60	20	375	181	F12	125	150	4	14	30	1	8x7x50
350	190	330	470	26	16	270	335	80	20	435	193	F14	140	175	4	18	35	1	10x8x70
400	216	380	525	30	16	305	365	80	22	485	219	F14	140	175	4	18	40	1	12x8x70
450	222	425	585	30	20	320	385	105	22	535	225	F16	165	210	4	22	40	1	12x8x100
500	229	475	650	33	20	365	450	90	25	670	232	F16	165	210	4	22	45	1	14x9x80
600	267	575	770	36	20	420	495	110	25	685	270	F16	165	210	4	22	55	1	16x10x100
700	292	675	840	36	24	480	540	110	30	800	295	F16	165	210	4	22	70	1	20x12x100
800	318	775	950	39	24	535	620	120	30	905	321	F25	254	300	8	18	80	1	22x14x110
900	330	875	1050	39	28	635	660	120	30	1005	333	F25	254	300	8	18	80	2	22x14x110
1000	410	975	1170	42	28	700	725	120	30	1110	413	F30	298	350	8	22	90	2	25x14x110
1200	470	1175	1390	48	32	790	855	120	30	1330	473	F30	298	350	8	22	100	2	28x16x110

Double flanged Type, (FTN) short pattern – 150# – DN50/2" till DN1200/48"

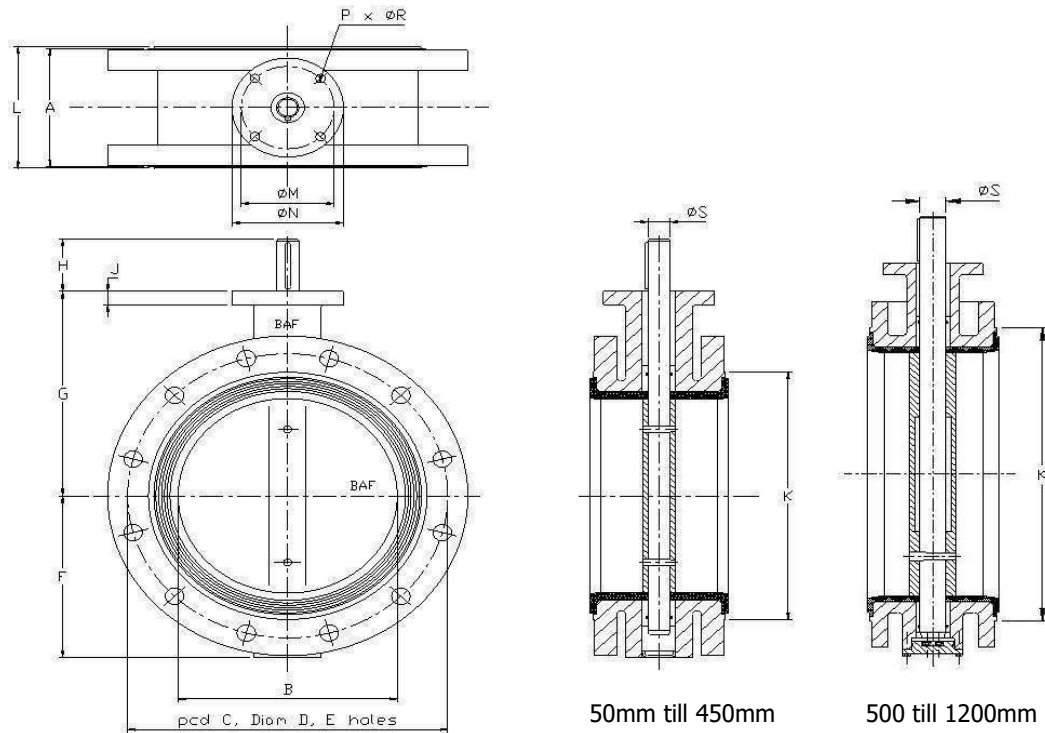

50mm till 450mm

500 till 1200mm

BAF RUBBERLINED BUTTERFLY VALVE, DOUBLE FLANGED FTN																			
Flange Connection #150, Design BS5155 / ISO-5752 Short pattern																			
Nominal	F.to.F		Flanges 150#									Topworks						Key	Weight
Size	A	B	C	D	E	F	G	H	J	K	L	ISO5211/1	M	N	P	R	S	No	Size
50	108	50	120,6	19	4	80	120	40	15	100	111	F07	70	110	4	9	10	1	3x3x30
65	112	65	139,7	19	4	90	140	40	18	120	115	F07	70	110	4	9	12	1	3x3x30
80	114	80	152,4	19	4	100	160	50	18	130	117	F07	70	110	4	9	12	1	5x5x40
100	127	100	190,5	19	8	115	175	50	18	160	130	F07	70	110	4	9	16	1	5x5x40
125	140	125	215,9	22	8	125	185	50	18	190	143	F10	102	125	4	12	20	1	6x6x40
150	140	150	241,3	22	8	145	195	50	18	215	143	F10	102	125	4	12	20	1	6x6x40
200	152	200	298,4	22	8	165	225	50	18	270	155	F10	102	125	4	12	20	1	6x6x40
250	165	250	361,9	25	12	210	270	60	20	325	168	F12	125	150	4	14	25	1	8x7x50
300	178	295	431,8	25	12	245	310	60	20	375	181	F12	125	150	4	14	30	1	8x7x50
350	190	330	476,2	28	12	270	335	80	20	435	193	F14	140	175	4	18	35	1	10x8x70
400	216	380	539,7	28	16	305	365	80	22	485	219	F14	140	175	4	18	40	1	12x8x70
450	222	425	577,8	32	16	320	385	105	22	535	225	F16	165	210	4	22	40	1	12x8x100
500	229	475	635	32	20	365	450	90	25	670	232	F16	165	210	4	22	45	1	14x9x80
600	267	575	749,1	35	20	420	495	110	25	685	270	F16	165	210	4	22	55	1	16x10x100
700	292	675	863,6	35	28	480	540	110	30	800	295	F16	165	210	4	22	70	1	20x12x100
800	318	775	977,9	41	28	535	620	120	30	905	321	F25	254	300	8	18	80	1	22x14x110
900	330	875	1085,8	41	32	635	660	120	30	1005	333	F25	254	300	8	18	80	2	22x14x110
1000	410	975	1200,15	41	36	700	725	120	30	1110	413	F30	298	350	8	22	90	2	25x14x110
1200	470	1175	1422,4	41	44	790	855	120	30	1330	473	F30	298	350	8	22	100	2	28x16x110

BAF operating torque for the butterfly valves

DN	NPS	Torque in Nm at given ΔP Class I					Torque in Nm at given ΔP Class II					Torque in Nm at given ΔP Class III				
		2	6	10	16	19	2	6	10	16	19	2	6	10	16	19
50	2	8	10	10	11	18	7	9	9	10	16	7	9	9	9	15
65	2,5	12	13	14	15	20	11	12	13	14	18	10	11	12	13	17
80	3	17	18	19	21	28	15	16	17	19	25	14	15	16	18	24
100	4	28	30	32	36	55	25	27	29	32	50	24	26	27	31	47
125	5	39	42	46	52	99	35	38	41	47	89	33	36	39	44	84
150	6	58	67	75	86	160	52	60	68	77	144	49	57	64	73	136
200	8	90	130	140	160	310	81	117	126	144	279	77	111	119	136	264
250	10	135	220	250	400	560	122	198	225	360	504	115	187	213	340	476
300	12	180	310	350	560	875	162	279	315	504	788	153	264	298	476	744
350	14	265	360	410	660	1220	239	324	369	594	1098	225	306	349	561	1037
400	16	305	540	840	1020	1650	275	486	756	918	1485	259	459	714	867	1403
450	18	500	740	850	1400	2300	450	666	765	1260	2070	425	629	723	1190	1955
500	20	500	970	1120	1800	2300	450	873	1008	1620	2070	425	825	952	1530	1955
600	24	800	1600	1900	3100	6100	720	1440	1710	2790	5490	680	1360	1615	2635	5185
700	28	1600	2800	3200	5200	9700	1440	2520	2880	4680	8730	1360	2380	2720	4420	8245
800	32	2250	3800	4400	7000	13500	2025	3420	3960	6300	12150	1913	3230	3740	5950	11475
900	36	2800	5400	6400	10200	17500	2520	4860	5760	9180	15750	2380	4590	5440	8670	14875
1000	40	4500	6900	8100	13000	...	4050	6210	7290	11700	...	3825	5865	6885	11050	...
1200	48	6300	10900	13000	21000	...	5670	9810	11700	18900	...	5355	9265	11050	17850	...
1400	56	10000	17000	20000	32000	...	9000	15300	18000	28800	...	8500	14450	17000	27200	...
1600	64	15000	23000	29000	46000	...	13500	20700	26100	41400	...	12750	19550	24650	39100	...

Class I Torque figures at given delta P indicated are based dry rubber condition

Class II Torque figures at given delta P indicated are based water condition

Class III Torque figures at given delta P indicated are based on lubricating fluids


Above given torque values are Including a 20% safety factor



BAF Cv Values at various disc angles

DN mm	NPS inch	10°	20°	30°	40°	50°	60°	70°	80°	90°
50	2	1,5	4,5	12	26	44	68	115	150	221
80	3	3,20	12	30	56	99	150	225	401	505
100	4	5,1	17,5	48	86	144	265	434	728	870
125	5	7,5	28	70	136	248	450	685	1188	1422
150	6	12	45	109	197	369	614	988	1427	2106
200	8	22	75	190	352	662	1150	1810	2670	3610
250	10	33	120	290	533	990	1730	2667	3853	5631
300	12	40	148	360	706	1306	2440	3730	5732	8106
350	14	55	190	453	923	1739	2984	4617	6669	9650
400	16	70	260	572	1210	2217	3800	6053	9103	12879
450	18	90	310	751	1462	2800	4750	7661	11465	16472
500	20	115	390	965	1901	3469	6010	9567	14733	21071
600	24	160	570	1327	2749	5140	8701	13748	20858	29021
700	28	218	750	1904	3667	6812	12122	19836	28652	41876
750	30	255	900	2200	4250	8160	14052	23402	33296	46010
800	32	290	1100	2603	5125	9309	15967	26028	35741	52000
900	36	370	1405	3308	6575	12126	20398	33379	48114	68475

Flow through BAF Butterfly Valve, size 400mm and 900mm

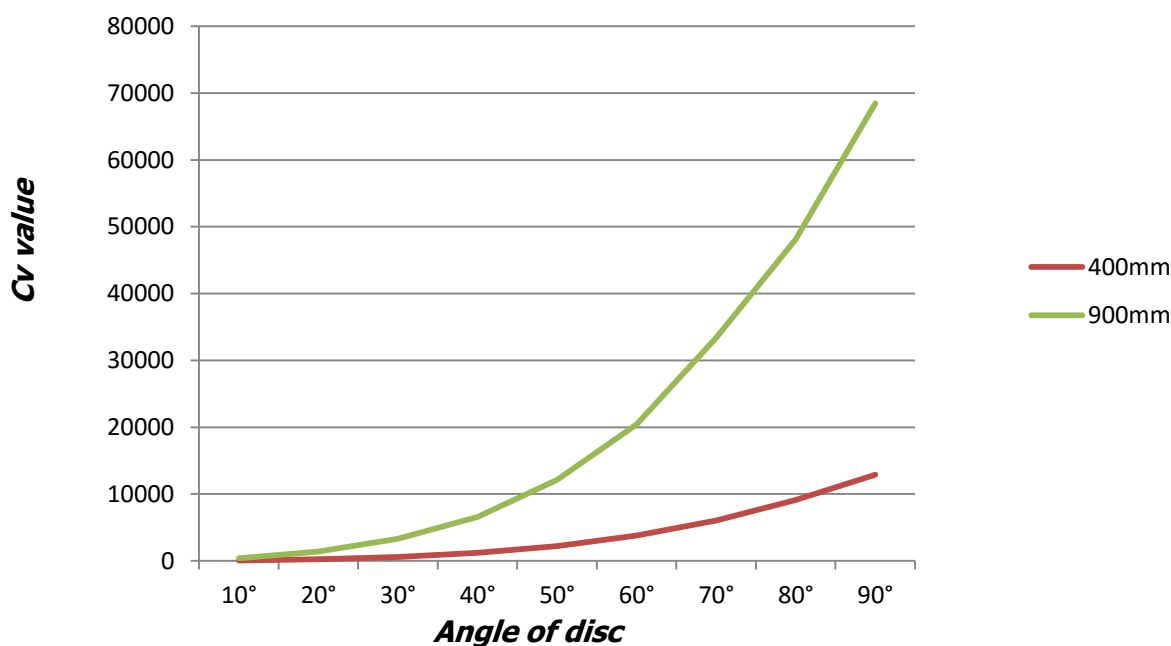

Cv equals water flow in US. gpm at 70°F and at 1 psi pressure drop

$$Cv = 1.167 Kv$$

$$Kv = 0.8569 Cv$$

$$V = Cv \sqrt{\frac{\Delta P G}{1}} = Gal/Min. (U.S.)$$

Where :

V= flow in G.P.M. (US)

ΔP = Pressure drop Psi at max flow

G = Specific gravity (water 1.00)

Cv = Flow coefficient (see above)



Head office :

Our office in the Netherlands

Kanaalstraat 7
4905 BH Oosterhout
The Netherlands
Tel : +31 162 46 08 40
Fax : +31 162 46 04 88
Email : info@bafvalves.nl

Our office in Kuwait

Mina Abdullah Industila Area
Block 5, Area 72A-96 Shuaiba
Kuwait
Tel : +965 2326 0744
Fax : +965 2326 0774
Email : info@bafvalves.nl

Our office in Singapore

21 Bukit Batok Crescent
#06-82, WCEGA Tower
Singapore 658065
Tel : +65 6570 0212
Fax : +65 6570 0210
Email : info@bafvalves.nl

Our office in Hong Kong

Aberdeen
Unit 1711-1714
17th floor Hing Wai
No. 7 Tin Wan
Hong Kong
Email : info@bafvalves.nl

Our office in Jiaxing

No. 26 Qiangsheng Road,
Xincheng Town, Xiuzhou
District, Jiaxing Zhejiang
Province 314015, People's
Republic of China
Email : info@bafvalves.nl

Our office in UAE

PO Box 50567
Hamriyah Free Zone – Shj
United Arab Emirates
Email: info@bafvalves.com

Our office in Shanghai

RM1811 Far East Building
No.1101 South Pudong
Rd. Pudong.
Shanghai 200120 China
Email: info@bafvalves.com