


Wafer Type

Valve Construction - Wafer Type


Products Range

Retainer Type (A Type)

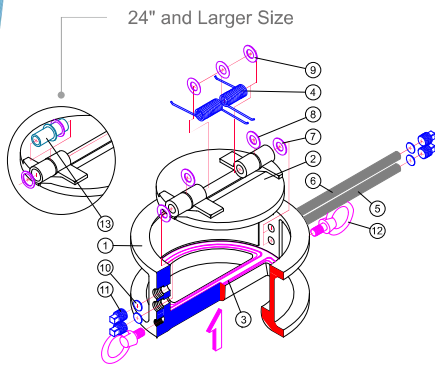

Retainer Type (A Type)			
No.	Parts Name	Q'ty	Remarks
1	Body	1	
2	Plate	2	
3	Seat	1	
4	Spring	1	1-1/2"(40A) to 5"(125A)
		2	6"(150A) to 22"(550A)
		4	24"(600A) & Larger size
5	Hinge Pin	1	
6	Stop Pin	1	
7	Body Bearing	2	
8	Plate Bearing	2	
9	Spring Bearing	0	1-1/2"(40A) to 5"(125A)
		3	6"(150A) to 22"(550A)
		5	24"(600A) & Larger size
10	Stabilizer	4	For Rubber Seat Valve Only
11	Retainer	4	
12	Eye Bolt	1	8"(200A) & Larger size
13	Sleeve	2	24"(600A) & Larger size

Retainerless Type (E Type)

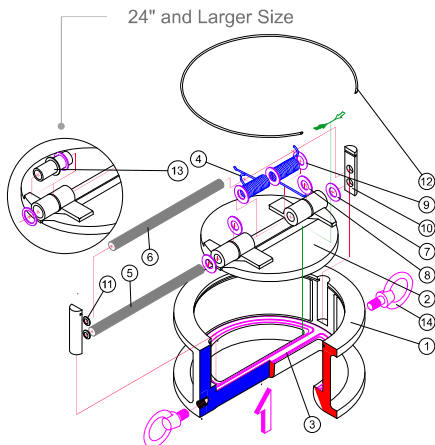

Retainerless Type (E Type)			
No.	Parts Name	Q'ty	Remarks
1	Body	1	
2	Plate	2	
3	Seat	1	
4	Spring	2	1-1/2"(40A) to 22"(550A)
		4	24"(600A) & Larger size
5	Hinge Pin	1	
6	Stop Pin	1	
7	Body Bearing	2	
8	Plate Bearing	2	
9	Spring Bearing	3	1-1/2"(40A) to 22"(550A)
		5	24"(600A) & Larger size
10	Adjust Plate	2	
11	Spring Washer	2	
12	Fix Ring	1	
13	Sleeve	2	24"(600A) & Larger size
14	Eye Bolt	1	8"(200A) & Larger size

Products Range

Body Material		CI			DI			CI / DI			CS / SS / AS											
Size		JIS		ANSI	JIS		ANSI	ISO/DIN		JIS			ANSI						ISO / DIN			
Inch	mm	5K	10K	125LB	5K	10K	150LB	PN10	PN16	5K	10K	20K	150LB	300LB	600LB	900LB	1500LB	2500LB	PN10	PN16	PN25	PN40
1-1/2"	40A	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—	●	●	●	●
2"	50A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
2-1/2"	65A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3"	80A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
4"	100A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
5"	125A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	●	●	●	●
6"	150A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
8"	200A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
10"	250A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
12"	300A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
14"	350A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●
16"	400A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●
18"	450A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	●	●	●	●
20"	500A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	●	●	●	●
22"	550A	●	●	125LB	●	●	●	—	—	●	●	—	●	—	—	—	—	—	—	—	—	—
24"	600A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	●	●	●	●
26"	650A	●	●	●	●	●	●	—	—	●	●	—	●	—	—	—	—	—	—	—	—	—
28"	700A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	●	●	●	—
30"	750A	●	●	●	●	●	●	—	—	●	●	●	●	●	●	—	—	—	—	—	—	—
32"	800A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	●	●	●	—
36"	900A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	●	●	●	—
40"	1000A	●	●	●	●	●	●	●	●	●	●	—	●	●	●	—	—	—	●	●	●	—
42"	1050A	—	●	●	—	—	●	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—
48"	1200A	●	●	●	●	●	●	●	●	●	●	—	●	●	●	—	—	—	●	●	●	—
54"	1350A	●	●	●	●	●	●	—	—	●	●	—	●	●	—	—	—	—	—	—	—	—
56"	1400A	—	—	●	—	—	●	●	●	—	—	—	●	●	—	—	—	—	●	●	●	—
60"	1500A	●	●	●	●	●	●	—	—	●	●	—	●	●	—	—	—	—	—	—	—	—


Note CI=Cast Iron ; DI=Ductile Iron ; CS=Carbon Steel ; SS=Stainless Steel ; AS=Alloy Steel

Wafer Type

Products Range

Dual Plate Wafer Type Check Valve

1-1/2"(40A) - 8"(200A)

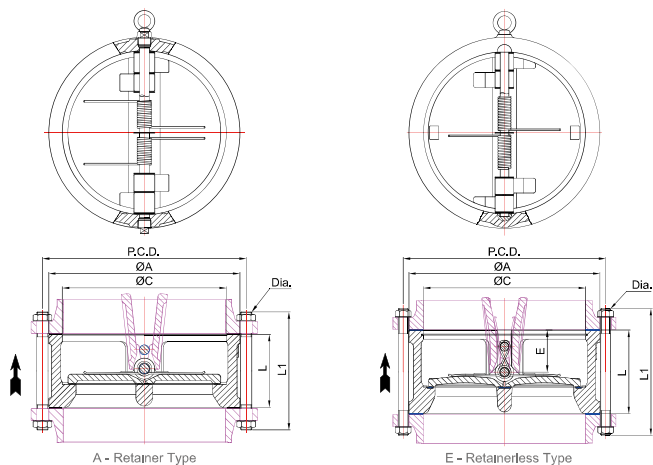

Dual Plate Wafer Type Check Valve

NPS	Class	Ø A	Ø C	L	P.C.D.	Stud		L1		Approx. WT (kgs)
						No.	Dia.	FF/RF	RJ	
1-1/2" (40A)	* 5K	80	56	54	95.0	4	M12	135	-	1.5
	* 10K	86	56	54	105.0	4	M16	145	-	1.5
	* 125/150LB	86	56	54	98.4	4	1/2"	135	-	1.5
	5K	80	50	60	95.0	4	M12	130	-	3.0
	10K	86	50	60	105.0	4	M16	145	-	3.0
	20K	86	50	60	105.0	4	M16	150	-	3.0
	150LB	86	50	60	98.4	4	1/2"	140	-	3.0
	300LB	95	50	60	114.3	4	3/4"	165	-	3.0
2" (50A)	* 5K	90	62	54	105.0	4	M12	130	-	2.0
	* 10K	101	62	54	120.0	4	M16	145	-	2.0
	* 125/150LB	105	62	54	120.7	4	5/8"	145	-	2.0
	5K	90	62	60	105.0	4	M12	135	-	3.0
	10K	101	62	60	120.0	4	M16	145	-	3.0
	20K	101	62	60	120.0	8	M16	150	-	3.0
	150LB	105	62	60	120.7	4	5/8"	150	-	3.0
	300LB	111	62	60	127.0	8	5/8"	165	-	3.0
	600LB	111	62	60	127.0	8	5/8"	170	185	4.0
	900LB	143	62	70	165.1	8	7/8"	220	235	6.0
2-1/2" (65A)	1500LB	143	62	70	165.1	8	7/8"	220	235	7.0
	2500LB	146	62	70	171.4	8	1"	250	265	14.0
	* 5K	115	75	54	130.0	4	M12	135	-	3.0
	* 10K	121	75	54	140.0	4	M16	150	-	3.0
	* 125/150LB	124	75	54	139.7	4	5/8"	145	-	3.0
	5K	115	75	67	130.0	4	M12	140	-	4.0
	10K	121	75	67	140.0	4	M16	155	-	4.0
	20K	121	75	67	140.0	8	M16	160	-	4.0
	150LB	124	75	67	139.7	4	5/8"	160	-	4.0
	300LB	130	75	67	149.2	8	3/4"	185	-	4.0

Note * = Cast Iron & Ductile Iron

NPS	Class	Ø A	Ø C	L	P.C.D.	Stud		L1		Approx. WT (kgs)
						No.	Dia.	FF/RF	RJ	
3" (80A)	* 5K	126	90	57	145.0	4	M16	145	-	5.0
	* 10K	131	90	57	150.0	8	M16	155	-	5.0
	* 125/150LB	137	90	57	152.4	4	5/8"	155	-	5.0
	5K	126	90	73	145.0	4	M16	155	-	6.0
	10K	131	90	73	150.0	8	M16	160	-	6.0
	20K	137	90	73	160.0	8	M20	175	-	7.0
	150LB	137	90	73	152.4	4	5/8"	170	-	6.0
	300LB	149	90	73	168.3	8	3/4"	195	-	7.0
	600LB	149	90	73	168.3	8	3/4"	200	215	7.0
	900LB	168	90	83	190.5	8	7/8"	230	245	13.0
	1500LB	175	90	83	203.2	8	1-1/8"	275	290	14.0
	2500LB	197	90	86	228.6	8	1-1/4"	320	340	21.0
4" (100A)	* 5K	146	115	64	165.0	8	M16	155	-	6.0
	* 10K	156	115	64	175.0	8	M16	165	-	6.0
	* 125/150LB	175	115	64	190.5	8	5/8"	170	-	6.0
	5K	146	115	73	165.0	8	M16	155	-	8.0
	10K	156	115	73	175.0	8	M16	160	-	8.0
	20K	162	115	73	185.0	8	M20	180	-	8.0
	150LB	175	115	73	190.5	8	5/8"	180	-	8.0
	300LB	181	115	73	200.0	8	3/4"	200	-	8.0
	600LB	194	115	79	215.9	8	7/8"	225	240	12.0
	900LB	206	115	102	235.0	8	1-1/8"	285	300	18.0
	1500LB	210	115	102	241.3	8	1-1/4"	310	325	21.0
	2500LB	235	115	105	273.0	8	1-1/2"	370	395	42.0
5" (125A)	* 5K	181	141	70	200.0	8	M16	160	-	9.0
	* 10K	187	141	70	210.0	8	M20	175	-	9.0
	* 125/150LB	197	141	70	215.9	8	3/4"	180	-	9.0
	5K	181	141	86	200.0	8	M16	170	-	10.0
	10K	187	141	86	210.0	8	M20	185	-	10.0
	20K	197	141	86	225.0	8	M22	200	-	14.0
	150LB	197	141	86	215.9	8	3/4"	200	-	10.0
	300LB	216	141	86	235.0	8	3/4"	220	-	14.0
6" (150A)	600LB	241	141	105	266.7	8	1"	270	285	23.0
	* 5K	211	170	76	230.0	8	M16	170	-	9.0
	* 10K	217	170	76	240.0	8	M20	185	-	10.0
	* 125/150LB	222	170	76	241.3	8	3/4"	190	-	11.0
	5K	211	170	98	230.0	8	M16	185	-	14.0
	10K	217	170	98	240.0	8	M20	200	-	15.0
	20K	235	170	98	260.0	12	M22	215	-	19.0
	150LB	222	170	98	241.3	8	3/4"	215	-	16.0
	300LB	251	170	98	269.9	12	3/4"	235	-	19.0
	600LB	267	170	136	292.1	12	1"	310	325	33.0
	900LB	289	170	159	317.5	12	1-1/8"	365	380	53.0
	1500LB	283	170	159	317.5	12	1-3/8"	430	450	59.0
8" (200A)	2500LB	318	170	159	368.3	8	2"	515	504	86.0
	* 5K	257	219	95	280.0	8	M20	200	-	17.0
	* 10K	267	219	95	290.0	12	M20	205	-	18.0
	* 125/150LB	279	219	95	298.5	8	3/4"	215	-	19.0
	5K	257	219	127	280.0	8	M20	225	-	28.0
	10K	267	219	127	290.0	12	M20	230	-	30.0
	20K	279	219	127	305.0	12	M22	250	-	33.0
	150LB	279	219	127	298.5	8	3/4"	250	-	32.0
	300LB	308	219	127	330.2	12	7/8"	280	-	36.0
	600LB	321	219	165	349.2	12	1-1/8"	370	385	68.0
	900LB	359	219	206	393.7	12	1-3/8"	440	455	88.0
	1500LB	352	219	206	393.7	12	1-5/8"	510	530	97.0
	2500LB	387	219	206	438.2	12	2"	600	625	129.0


Note * = Cast Iron & Ductile Iron

Wafer Type

Products Range

Dual Plate Wafer Type Check Valve

10" (250A) - 24" (600A)

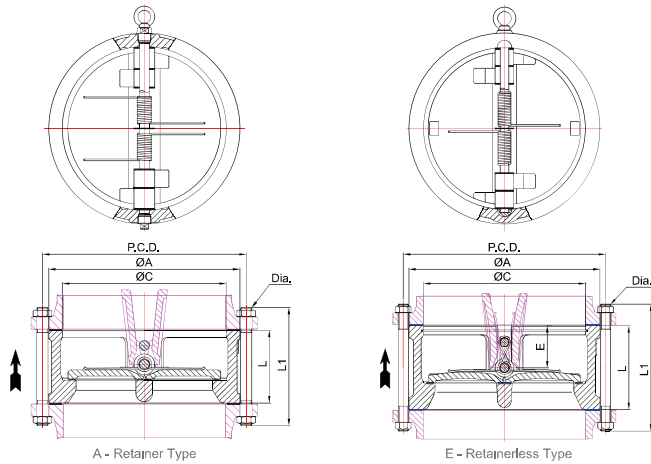

Dual Plate Wafer Type Check Valve

NPS	Class	Ø A	Ø C	L	P.C.D.	Stud		L1		Approx. WT (kgs)
						No.	Dia.	FF/RF	RJ	
10" (250A)	* 5K	322	272	108	345.0	12	M20	220	-	28.0
	* 10K	330	272	108	355.0	12	M22	230	-	29.0
	* 125/150LB	340	272	108	362.0	12	7/8"	240	-	31.0
	5K	322	272	146	345.0	12	M20	250	-	42.0
	10K	330	272	146	355.0	12	M22	255	-	44.0
	20K	352	272	146	380.0	12	M24	280	-	48.0
	150LB	340	272	146	362.0	12	7/8"	280	-	47.0
	300LB	362	272	146	387.4	16	1"	320	-	51.0
	600LB	400	272	213	431.8	16	1-1/4"	440	455	104.0
	900LB	435	272	241	469.9	16	1-3/8"	485	505	132.0
12" (300A)	1500LB	435	272	248	482.6	12	1-7/8"	595	620	140.0
	2500LB	476	272	254	539.8	12	2-1/2"	750	785	170.0
	* 5K	367	322	143	390.0	12	M20	255	-	47.0
	* 10K	375	322	143	400.0	16	M22	270	-	50.0
	* 125/150LB	410	322	143	431.8	12	7/8"	280	-	56.0
	5K	367	322	181	390.0	12	M20	285	-	75.0
	10K	375	322	181	400.0	16	M22	290	-	78.0
	20K	403	322	181	430.0	16	M24	315	-	81.0
	150LB	410	322	181	431.8	12	7/8"	315	-	84.0
	300LB	422	322	181	450.8	16	1-1/8"	375	-	88.0
14" (350A)	600LB	457	322	229	489.0	20	1-1/4"	465	480	144.0
	900LB	498	322	292	533.4	20	1-3/8"	555	575	169.0
	1500LB	521	322	305	571.5	16	2"	690	720	178.0
	2500LB	549	322	305	619.1	12	2-3/4"	850	885	214.0

Note * = Cast Iron & Ductile Iron

NPS	Class	Ø A	Ø C	L	P.C.D.	Stud		L1		Approx. WT (kgs)
						No.	Dia.	FF/RF	RJ	
14" (350A)	* 5K	410	356	184	435.0	12	M22	300	-	63.0
	* 10K	420	356	184	445.0	16	M22	315	-	65.0
	* 125/150LB	451	356	184	476.3	12	1"	325	-	71.0
	5K	410	356	184	435.0	12	M22	295	-	87.0
	10K	420	356	184	445.0	16	M22	300	-	90.0
	20K	447	356	222	480.0	16	M30	385	-	162.0
	150LB	451	356	184	476.3	12	1"	330	-	97.0
	300LB	486	356	222	514.4	20	1-1/8"	424	-	176.0
	600LB	492	356	273	527.0	20	1-3/8"	520	535	198.0
	900LB	521	356	356	558.8	20	1-1/2"	640	665	452.0
16" (400A)	1500LB	578	356	356	635.0	16	2-1/4"	775	805	463.0
	* 5K	470	406	191	495.0	16	M22	315	-	86.0
	* 10K	483	406	191	510.0	16	M24	325	-	90.0
	* 125/150LB	514	406	191	539.8	16	1"	340	-	99.0
	5K	470	406	191	495.0	16	M22	300	-	159.0
	10K	483	406	191	510.0	16	M24	310	-	165.0
	20K	507	406	232	540.0	16	M30	410	-	212.0
	150LB	514	406	191	539.8	16	1"	340	-	159.0
	300LB	540	406	232	571.5	20	1-1/4"	445	-	227.0
	600LB	565	406	305	603.2	20	1-1/2"	570	585	288.0
18" (450A)	900LB	575	406	384	616.0	20	1-5/8"	680	705	562.0
	1500LB	641	406	384	704.8	16	2-1/2"	840	875	674.0
	* 5K	530	457	203	555.0	16	M22	325	-	109.0
	* 10K	538	457	203	565.0	20	M24	345	-	113.0
	* 125/150LB	549	457	203	577.9	16	1-1/8"	375	-	118.0
	5K	530	457	203	555.0	16	M22	315	-	175.0
	10K	538	457	203	565.0	20	M24	325	-	180.0
	20K	572	457	264	605.0	20	M30	445	-	294.0
	150LB	549	457	203	577.9	16	1-1/8"	365	-	185.0
	300LB	597	457	264	628.6	24	1-1/4"	485	-	301.0
20" (500A)	600LB	613	457	362	654.0	20	1-5/8"	645	665	401.0
	900LB	638	457	451	685.8	20	1-7/8"	785	810	643.0
	1500LB	705	457	468	774.7	16	2-3/4"	970	1005	927.0
	* 5K	580	508	213	605.0	20	M22	340	-	164.0
	* 10K	593	508	213	620.0	20	M24	355	-	172.0
	* 125/150LB	606	508	213	635.0	20	1-1/8"	395	-	180.0
	5K	580	508	219	605.0	20	M22	330	-	210.0
	10K	593	508	219	620.0	20	M24	345	-	220.0
	20K	627	508	292	660.0	20	M30	475	-	363.0
	150LB	606	508	219	635.0	20	1-1/8"	400	-	234.0
22" (550A)	300LB	654	508	292	685.8	24	1-1/4"	520	-	373.0
	600LB	683	508	368	723.9	24	1-5/8"	665	685	640.0
	900LB	699	508	451	749.3	20	2"	805	830	696.0
	* 5K	638	559	219	665.0	20	M24	345	-	206.0
	* 10K	647	559	219	680.0	20	M30	385	-	210.0
	5K	638	559	219	665.0	20	M24	335	-	227.0
	10K	647	559	219	680.0	20	M30	365	-	231.0
	* 5K	688	610	222	715.0	20	M24	350	-	244.0
	* 10K	697	610	222	730.0	24	M30	395	-	250.0
	* 125/150LB	718	610	222	749.3	20	1-1/4"	415	-	258.0
24" (600A)	5K	688	610	222	715.0	20	M24	340	-	375.0
	10K	697	610	222	730.0	24	M30	370	-	384.0
	20K	731	610	318	770.0	24	M36	520	-	584.0
	150LB	718	610	222	749.3	20	1-1/4"	420	-	394.0
	300LB	775	610	318	812.8	24	1-1/2"	570	-	598.0
	600LB	791	610	438	838.2	24	1-7/8"	775	795	918.0
	900LB	838	610	495	901.7	20	2-1/2"	940	970	1332.0


Note * = Cast Iron & Ductile Iron

Wafer Type

Products Range

Dual Plate Wafer Type Check Valve

26" (650A) - 60" (1500A)

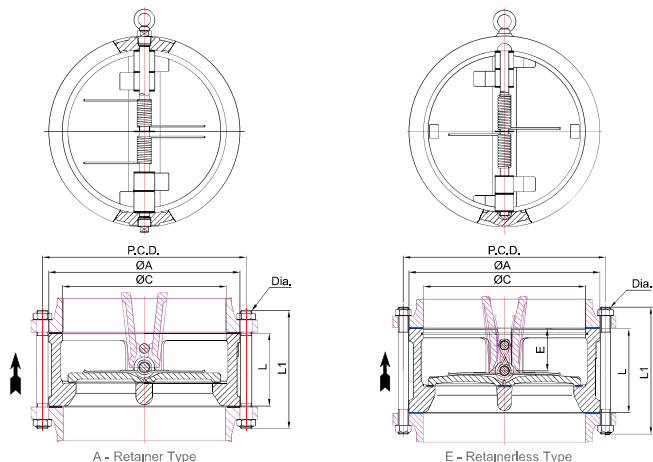

Dual Plate Wafer Type Check Valve

NPS	Class	Ø A	Ø C	L	P.C.D.	Stud		L1		Approx. WT (kgs)
						No.	Dia.	FF/RF	RJ	
26" (650A)	* 5K	743	660	222	770.0	24	M24	410	-	540.0
	* 10K	747	660	222	780.0	24	M30	455	-	545.0
	* 125/150LB	775	660	222	806.4	24	1-1/4"	470	-	575.0
	5K	743	660	222	770.0	24	M24	470	-	625.0
	10K	747	660	222	780.0	24	M30	510	-	640.0
28" (700A)	150LB	775	660	222	806.4	24	1-1/4"	595	-	700.0
	* 5K	793	711	305	820.0	24	M24	455	-	490.0
	* 10K	807	711	305	840.0	24	M30	500	-	505.0
	* 125/150LB	832	711	305	863.6	28	1-1/4"	515	-	515.0
	5K	793	711	305	820.0	24	M24	435	-	495.0
30" (750A)	10K	807	711	305	840.0	24	M30	465	-	510.0
	20K	852	711	368	900.0	24	M45	615	-	575.0
	150LB	832	711	305	863.6	28	1-1/4"	565	-	515.0
	300LB	899	711	368	939.8	28	1-5/8"	670	-	770.0
	600LB	914	711	483	965.2	28	2"	845	870	1055.0
32" (800A)	* 5K	847	762	305	880.0	24	M30	460	-	420.0
	* 10K	867	762	305	900.0	24	M30	490	-	440.0
	* 125/150LB	883	762	305	914.4	28	1-1/4"	515	-	450.0
	5K	847	762	305	880.0	24	M30	470	-	550.0
	10K	867	762	305	900.0	24	M30	485	-	570.0
36" (900A)	20K	914	762	368	970.0	24	M52	655	-	880.0
	150LB	883	762	305	914.4	28	1-1/4"	595	-	580.0
	300LB	953	762	368	997.0	28	1-3/4"	705	-	920.0
	600LB	972	762	505	1022.4	28	2"	870	900	1520.0

Note * = Cast Iron & Ductile Iron

NPS	Class	Ø A	Ø C	L	P.C.D.	Stud		L1		Approx. WT (kgs)
						No.	Dia.	FF/RF	RJ	
32" (800A)	* 5K	897	813	356	930.0	24	M30	510	-	500.0
	* 10K	917	813	356	950.0	28	M30	545	-	520.0
	* 125/150LB	940	813	356	977.9	28	1-1/2"	570	-	540.0
	5K	897	813	356	930.0	24	M30	495	-	590.0
	10K	917	813	356	950.0	28	M30	510	-	610.0
36" (900A)	20K	974	813	368	1030.0	24	M52	670	-	960.0
	150LB	940	813	356	977.9	28	1-1/2"	630	-	630.0
	300LB	1006	813	368	1054.1	28	1-7/8"	735	-	1030.0
	600LB	1022	813	533	1079.5	28	2-1/4"	920	945	1420.0
	* 5K	997	914	368	1030.0	24	M30	530	-	820.0
40" (1000A)	* 10K	1017	914	368	1050.0	28	M30	560	-	830.0
	* 125/150LB	1048	914	368	1085.8	32	1-1/2"	600	-	840.0
	5K	997	914	368	1030.0	24	M30	530	-	820.0
	10K	1017	914	368	1050.0	28	M30	555	-	830.0
	20K	1084	914	483	1140.0	28	M52	745	-	1240.0
42" (1050A)	150LB	1048	914	368	1085.8	32	1-1/2"	680	-	840.0
	300LB	1118	914	483	1168.4	32	2"	830	-	1270.0
	600LB	1130	914	635	1193.8	28	2-1/2"	1045	-	2120.0
	* 5K	1097	1016	432	1130.0	28	M30	585	-	985.0
	* 10K	1121	1016	432	1160.0	28	M36	630	-	1030.0
44" (1100A)	* 125/150LB	1162	1016	432	1200.2	36	1-1/2"	645	-	1070.0
	5K	1097	1016	432	1130.0	28	M30	585	-	1094.0
	10K	1121	1016	432	1160.0	28	M36	595	-	1135.0
	150LB	1162	1016	432	1200.2	36	1-1/2"	710	-	1172.0
	300LB	1114	1016	546	1155.7	32	1-5/8"	895	-	1800.0
46" (1150A)	600LB	1156	1016	660	1212.8	32	2-1/4"	1130	-	3625.0
	* 125/150LB	1219	1067	432	1257.3	36	1-1/2"	680	-	1260.0
	150LB	1219	1067	432	1257.3	36	1-1/2"	740	-	1260.0
	300LB	1165	1067	568	1206.5	32	1-5/8"	925	-	2600.0
	600LB	1219	1067	702	1282.7	28	2-1/2"	1200	-	2840.0
48" (1200A)	* 5K	1317	1219	524	1350.0	32	M30	700	-	1812.0
	* 10K	1341	1219	524	1380.0	32	M36	750	-	1850.0
	* 125/150LB	1384	1219	524	1422.4	44	1-1/2"	775	-	1920.0
	5K	1317	1219	524	1350.0	32	M30	675	-	1800.0
	10K	1341	1219	524	1380.0	32	M36	705	-	1850.0
50" (1250A)	150LB	1384	1219	524	1422.4	44	1-1/2"	850	-	1980.0
	300LB	1324	1219	629	1371.6	32	1-7/8"	1030	-	2960.0
	600LB	1391	1219	787	1460.5	32	2-3/4"	1240	-	4325.0
	* 5K	1472	1372	540	1505.0	32	M30	720	-	2630.0
	* 10K	1495	1372	540	1540.0	36	M42	780	-	2700.0
52" (1300A)	* 125/150LB	1549	1372	540	1593.8	44	1-3/4"	820	-	2800.0
	5K	1472	1372	540	1505.0	32	M30	690	-	2630.0
	10K	1495	1372	540	1540.0	36	M42	735	-	2700.0
	150LB	1549	1372	540	1593.8	44	1-3/4"	905	-	2800.0
	300LB	1492	1372	718	1549.4	28	2-1/4"	1095	-	3900.0
54" (1350A)	* 125/150LB	1607	1422	568	1651.0	48	1-3/4"	895	-	3150.0
	150LB	1607	1422	568	1651.0	48	1-3/4"	940	-	3300.0
	* 5K	1627	1524	660	1660.0	36	M30	850	-	3500.0
	* 10K	1655	1524	660	1700.0	40	M42	910	-	3550.0
	* 125/150LB	1714	1524	660	1759.0	52	1-3/4"	945	-	3700.0
56" (1400A)	5K	1627	1524	660	1660.0	36	M30	815	-	3840.0
	10K	1655	1524	660	1700.0	40	M42	860	-	3980.0
	150LB	1714	1524	660	1759.0	52	1-3/4"	1050	-	4150.0
	300LB	1645	1524	838	1701.8	32	2-1/4"	1315	-	5285.0

Note * = Cast Iron & Ductile Iron

Wafer Type

Products Range


Dual Plate Wafer Type Check Valve Outside Dimension Chart

Size		JIS			ANSI B16.5 (ANSI B16.47 Series A / MSS SP - 44)						
Inch	mm	5K	10K	20K	125	150	300	600	900	1500	2500
1-1/2"	40A	80	86	86	86	86	95	95	98	98	117
2"	50A	90	101	101	105	105	111	111	143	143	146
2-1/2"	65A	115	121	121	124	124	130	130	165	165	168
3"	80A	126	131	137	137	137	149	149	168	175	197
4"	100A	146	156	162	175	175	181	194	206	210	235
5"	125A	181	187	197	197	197	216	241	248	254	279
6"	150A	211	217	235	222	222	251	267	289	283	318
8"	200A	257	267	279	279	279	308	321	359	352	387
10"	250A	322	330	352	340	340	362	400	435	435	476
12"	300A	367	375	403	410	410	422	457	498	521	549
14"	350A	410	420	447	451	451	486	492	521	578	
16"	400A	470	483	507	514	514	540	565	575	641	
18"	450A	530	538	572	549	549	597	613	638	705	
20"	500A	580	593	627	606	606	654	683	699	756	
22"	550A	638	647								
24"	600A	688	697	731	718	718	775	791	838	902	
26"	650A	743	747	802		775	835	867	883		
28"	700A	793	807	852		832	899	914	946		
30"	750A	847	867	914	883	883	953	972	1010		
32"	800A	897	917	974		940	1006	1022	1073		
36"	900A	997	1017	1084	1048	1048	1118	1130	1200		
40"	1000A	1097	1121			1162	1114	1156	1251		
42"	1050A		1122		1219	1219	1165	1219	1302		
44"	1100A	1207	1231			1276	1219	1270	1368		
48"	1200A	1317	1341		1384	1384	1324	1391	1486		
50"	1250A					1435	1378	1448			
52"	1300A					1492	1429	1499			
54"	1350A	1472	1495		1549	1549	1492	1556			
56"	1400A					1607	1543	1613			
60"	1500A	1627	1655		1714	1714	1645	1734			

API 605 ANSI B16.47 Series B				ISO / DIN				BS10		Size	
150	300	600	900	PN10	PN16	PN25	PN40	T/D	T/E	mm	Inch
				92	92	92	92	85	85	40A	1-1/2"
				107	107	107	107	98	98	50A	2"
				127	127	127	127	111	111	65A	2-1/2"
				142	142	142	142	130	130	80A	3"
				162	162	168	168	162	162	100A	4"
				192	192	194	194	193	193	125A	5"
				218	218	224	224	219	216	150A	6"
				273	273	284	284	276	273	200A	8"
				328	328	340	340	336	336	250A	10"
				378	378	400	400	387	384	300A	12"
				438	438	457	457	447	447	350A	14"
				489	489	514	514	498	498	400A	16"
				539	539	564	564	562	562	450A	18"
				594	594	624	624	619	619	500A	20"
								673	673	550A	22"
				695	695	731	731	730	727	600A	24"
725	771	765	838							650A	26"
776	825	819	902	804	804	833				700A	28"
827	886	879	959					898	895	750A	30"
881	940	933	1016	911	911	942				800A	32"
987	1048	1048	1124	1011	1011	1042		1060	1060	900A	36"
1095	1149	1156	1251	1124	1124	1155				1000A	40"
1146	1200	1219	1302					1225	1216	1050A	42"
1197	1251	1270	1368							1100A	44"
1306	1368	1391	1486	1341	1341	1365		1378	1375	1200A	48"
1357	1419	1448								1250A	50"
1408	1470	1499								1300A	52"
1464	1530	1556								1350A	54"
1514	1594	1613		1542	1542	1581				1400A	56"
1630	1707	1734								1500A	60"


Valve Body Structure

The inherent design of the dual plate check valve results in significantly reduced weight when compared to conventional full-bodied swing check valves.

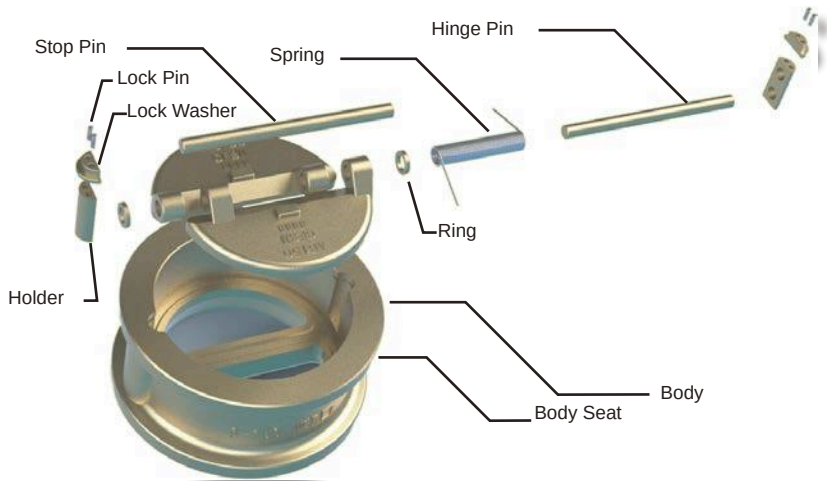


Dual Plate Check Valve Types


Wafer Type

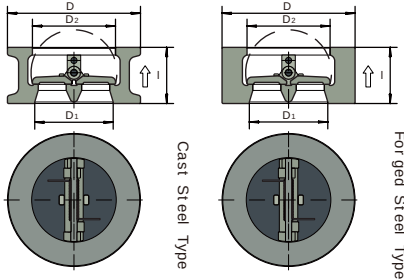


Solid Lug Type

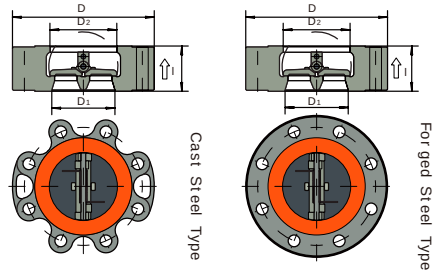

Flanged Type

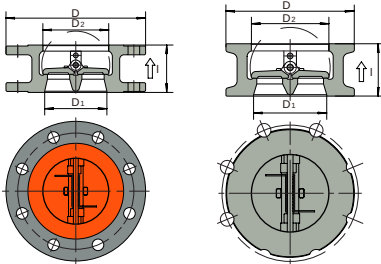

Hub Ended Type

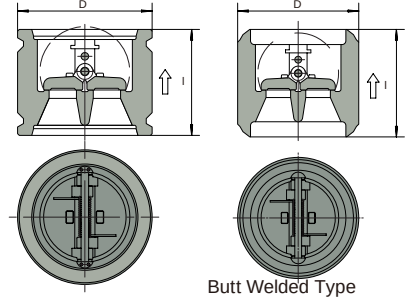

Standards

1	Design and Manufacture	API 594 \ API 6D \ JB/T 8937
2	Pressure-temperature Ratings	ASME B16.34 \ DIN 2401 \ GB/T 9124
3	Face-to-face Dimensions	API 594 \ API 6D \ DIN 3202 \ JB/T 8937
4	Inspection and Test	API 598 \ API 6D \ JB/T 9092
5	End Flange Dimensions	ASME B16.5 \ ASME B1647 \ API 605 \ ISO 7005-1 \ JIS B2238 \ DIN 2543-2548 \ GB/T 9112-9124 \ JB/T 74-90 \ HG 20592-20635
6	Materials (Cast or Forged)	ASTM \ GB \ JIS \ DIN \ BS

Pressure Rating and Size

ASME CLASS					
150	300	600	900	1500	2500
2~60" (50~1500mm)	2~60" (50~1500mm)	2~48" (50~1200mm)	2~48" (50~1200mm)	2~24" (50~600mm)	2~60" (50~300mm)
API 6A			JIS		
3000 Psi	5000 Psi	10000 Psi	10K	20K	30K
2 1/16 - 20 3/4"	2 1/16 - 20 3/4"	2 1/16 - 11"	50A~1200A	50A~900A	50A~400A
PN (Mpa)					
PN 10	PN 16	PN 25	PN 40	PN 63	PN 100
50~1600mm	50~1600mm	50~1200mm	50~600mm	50~400mm	50~400mm

Dual Plate Wafer Valve

Material List

BODY	DISC	BODY SEAT	DISC SEAT	SPRING	WETTED PARTS
A216 WCB / A105	A351 CF8	410SS / STELLITE	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A216 WCB / A105	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	Same as Body	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F51
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F53
UNS S31254	UNS S31254	Same as Body	Same as Disc	Inconel x-750	254-SMO
UNS N26625	UNS N26625	Same as Body	Same as Disc	Inconel x-750	Inconel 625

Structure Features


1	Retainerless body; No gasket restrictions; No fugitive emissions.
2	It is short in face to face dimensions, being 1/4~1/8 times of traditional flange type check valve.
3	It is impact in volume size and light in weight of about 1/4~1/20 times that of traditional flange type check valve.
4	The disc closes quickly with less water hammer pressure.
5	It is convenient in installation, being available for use on level or vertical pipelines.
6	Flow passage is fluent with less flow resistance.
7	Disc travel is short with less impact force caused by valve closing.
8	Soft seat is rubber cure process and fire safe design.

structure Comparison



The Dual Plate Check Valve's body is es-sentially a short, heavy wall cylinder with no holes through the body wall. There is no need for retainers and leakage to the outside is impossible.



Conventional Dual Plate Check Valves Require hoses through the body wall to facilitate the installation of the hinge and stop pins. These holes are sealed by threaded pipe plugs called retainers. After being in service for a period of time, these plugs often leak due to temperature cycling, vibration and other causes.



Fluid Dynamics

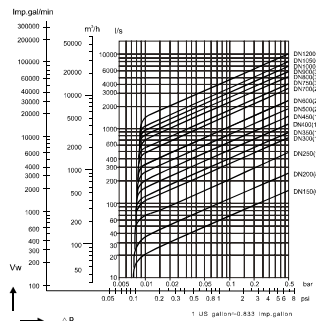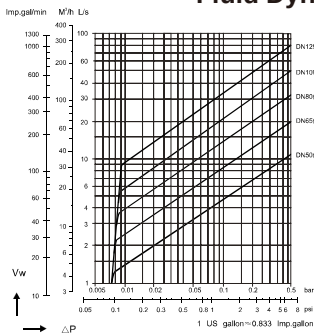

Dual Plate Wafer Valve

Main Outline Dimensions

Class 150

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 150 PN 20	1 1/2	40	60	85	40	42	1.5	98.5	4	1/2	M12	130	145
	2	50	60	103	51	55	2.2	120.5	4	5/8	M16	140	155
	2 1/2	65	67	122	65	68	3.1	139.5	4	5/8	M16	150	165
	3	80	73	135	80	82	4.3	152.5	4	5/8	M16	160	175
	4	100	73	173	102	108	6.3	190.5	8	5/8	M16	170	185
	5	125	86	195	127	130	8.4	216	8	3/4	M20	190	205
	6	150	98	221	152	165	12.6	241.5	8	3/4	M20	205	220
	8	200	127	277	203	220	24	298.5	8	3/4	M20	240	255
	10	250	146	337	254	270	40	362	12	7/8	M24	270	285
	12	300	181	407	305	320	66	432	12	7/8	M24	310	325
	14	350	184	448	337	350	83	476	12	1	M27	325	340
	16	400	191	512	387	400	102	540	16	1	M27	340	355
	18	450	203	547	438	438	124	578	16	1 1/8	M30	365	380
	20	500	219	604	495	495	150	635	20	1 1/8	M30	385	400
	24	600	222	715	595	595	203	749.5	20	1 1/4	M33	405	420
	28	700	305	830	685	685	380	863.6	28	1 1/4	M33	540	-
	30	750	305	880	735	735	413	914.4	28	1 1/4	M33	550	-
	32	800	305	938	780	780	580	978	28	1 1/2	M39	570	-
	36	900	368	1045	875	875	665	1085.8	32	1 1/2	M39	660	-
	40	1000	432	1160	975	975	880	1200	36	1 1/2	M39	720	-
	42	1050	432	1216	1020	1020	998	1257.3	36	1 1/2	M39	740	-
	48	1200	524	1380	1165	1165	1470	1422.4	44	1 1/2	M39	850	-
	54	1350	568	1546	1320	1320	2100	1593.8	44	1 3/4	M45	940	-
	60	1500	629	1708	1460	1460	2950	1757	52	1 3/4	M45	1020	-

Class 300

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Diameter Of Bolts	Mm	RF	RJ
Class 300 PN 50	1 1/2	40	60	94	40	42	1.8	114.5	4	3/4	M20	160	170
	2	50	60	110	51	55	2.5	127	8	5/8	M16	155	175
	2 1/2	65	67	128	65	68	4	149	8	3/4	M20	175	195
	3	80	73	147	80	82	5	168.5	8	3/4	M20	190	210
	4	100	73	179	102	108	7	200	8	3/4	M20	195	215
	5	125	86	214	127	130	11.2	235	8	3/4	M20	215	235
	6	150	98	249	152	165	16.5	270	12	3/4	M20	230	250
	8	200	127	305	220	230	31.5	330	12	7/8	M24	280	300
	10	250	146	359	254	270	49.5	387.5	16	1	M27	315	335
	12	300	181	420	305	320	81	451	16	1 1/8	M30	365	385
	14	350	222	483	337	343	117	514.5	20	1 1/8	M30	410	430
	16	400	232	537	387	400	158	571.5	20	1 1/4	M33	435	455
	18	450	264	594	438	438	200	628.5	24	1 1/4	M33	475	495
	20	500	292	652	495	495	285	686	24	1 1/4	M33	510	535
	24	600	318	772	595	595	380	813	24	1 1/2	M39	560	585
	28	700	368	896	685	685	586	939.8	28	1 5/8	M42	660	-
	30	750	368	950	735	735	696	997	28	1 3/4	M45	680	-
	32	800	368	1004	780	780	986	1054	28	1 7/8	M48	700	-
	36	900	483	1114	875	875	1070	1168.4	32	2	M51	840	-
	40	1000	568	1110	975	975	1320	1155.7	32	1 5/8	M42	920	-
	42	1050	568	1160	1020	1020	1500	1206.5	32	1 5/8	M42	930	-
	48	1200	629	1320	1165	1165	2250	1371.6	32	1 7/8	M48	1030	-
	54	1350	635	1488	1320	1320	3360	1549.4	28	2 1/4	M57	1100	-
	60	1500	701	1640	1460	1460	4425	1701.8	32	2 1/4	M57	1190	-

Dual Plate Wafer Valve

Main Outline Dimensions

Class 600

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 600 PN 110	2	50	60	110	51	55	2.5	127	8	5/8	M16	175	180
	2 1/2	65	67	128	65	68	4	149	8	3/4	M20	195	200
	3	80	73	147	80	82	5	168.5	8	3/4	M20	210	215
	4	100	79	191	102	108	9	216	8	7/8	M24	235	240
	5	125	105	240	127	130	14.5	267	8	1	M27	280	285
	6	150	136	264	152	165	27	292	12	1	M27	320	325
	8	200	165	318	200	210	48	349	12	1 1/8	M30	370	375
	10	250	213	398	250	255	93.5	432	16	1 1/4	M33	440	445
	12	300	229	455	300	300	114.5	489	20	1 1/4	M33	460	465
	14	350	273	490	335	335	187	527	20	1 3/8	M36	520	525
	16	400	305	562	385	385	261	603	20	1 1/2	M39	575	580
	18	450	362	610	435	435	365	654	20	1 5/8	M42	650	655
	20	500	368	680	487	487	453	724	24	1 5/8	M42	670	680
	24	600	438	786	585	585	705	838	24	1 7/8	M48	780	790
	28	700	505	912	685	685	995	965.2	28	2	M51	870	880
	30	750	505	968	735	735	1180	1022.4	28	2	M51	880	890
	32	800	505	1020	780	780	1675	1079.5	28	2 1/4	M57	900	910
	36	900	635	1128	875	875	2110	1193.8	28	2 1/2	M64	1050	1060
	40	1000	701	1152	975	975	2245	1212.8	32	2 1/4	M57	1180	1190
	42	1050	701	1215	1020	1020	2550	1282.7	28	2 1/2	M64	1210	1220
	48	1200	787	1386	1165	1165	3830	1460.5	32	2 3/4	M70	1360	1370

Class 900

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 900 PN 150	2	50	70	140	50	55	6	165	8	7/8	M24	225	230
	2 1/2	65	83	162	65	68	7.5	190.5	8	1	M27	250	255
	3	80	83	165	75	82	9.6	190.5	8	7/8	M24	240	245
	4	100	102	204	100	108	17	235	8	1 1/8	M30	285	290
	5	125	110	245	125	130	28	279.5	8	1 1/4	M33	310	315
	6	150	159	286	150	160	41	317.5	12	1 1/8	M30	365	370
	8	200	206	356	200	210	80	393.5	12	1 3/8	M36	440	445
	10	250	241	432	250	255	135	470	16	1 3/8	M36	490	495
	12	300	292	495	300	300	212	533.5	20	1 3/8	M36	560	565
	14	350	356	520	325	325	335	559	20	1 1/2	M39	645	655
	16	400	384	572	380	380	395	616	20	1 5/8	M42	685	695
	18	450	451	636	425	425	600	686	20	1 7/8	M48	790	800
	20	500	451	696	475	475	810	749.5	20	2	M52	810	820
	24	600	495	835	570	570	1030	901.5	20	2 1/2	M64	945	955
	28	700	559	944	670	670	1450	1022.4	20	3	M76	1050	1060
	30	750	559	1008	715	715	1820	1085.8	20	3	M76	1060	1070
	32	800	559	1070	760	760	2100	1155.7	20	3 1/4	M82	1100	1110
	36	900	701	1198	860	860	3250	1289	20	3 1/2	M88	1280	1290

Class 1500

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 1500 PN 260	2	50	70	140	50	55	6	165	8	7/8	M24	225	230
	2 1/2	65	83	162	65	68	7.5	190.5	8	1	M27	250	255
	3	80	83	172	75	82	9.6	203	8	7/8	M30	270	275
	4	100	102	208	100	108	17	241.5	8	1 1/4	M33	310	315
	5	125	110	252	125	130	38	292	8	1 1/2	M39	370	375
	6	150	159	281	150	150	50	317.5	12	1 3/8	M36	430	440
	8	200	206	350	200	200	96	393.5	12	1 5/8	M42	510	520
	10	250	248	433	250	250	176	482.5	12	1 7/8	M48	600	610
	12	300	305	518	300	300	287	571.5	16	2	M52	695	710
	14	350	356	576	320	320	433	635	16	2 1/4	M56	775	790
	16	400	384	640	360	360	580	705	16	2 1/2	M64	850	870
	18	450	468	703	420	420	780	774.7	16	2 3/4	M70	970	990
	20	500	533	754	470	470	1250	831.8	16	3	M76	1080	1100
	24	600	559	898	570	570	2700	990.6	16	3 1/2	M88	1190	1210

Dual Plate Wafer Valve

Main Outline Dimensions

Class 2500

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 2500 PN 420	2	50	70	143	50	55	9	171.5	8	1	M27	255	260
	2 1/2	65	83	166	65	68	12	197	8	1 1/8	M30	290	300
	3	80	86	194	75	82	16	228.5	8	1 1/4	M33	320	330
	4	100	105	232	100	108	30	273	8	1 1/2	M39	370	380
	5	125	110	277	125	130	52	324	8	1 3/4	M45	420	435
	6	150	159	316	150	155	65	368.5	8	2	M52	515	530
	8	200	206	386	200	205	124	438	12	2	M52	600	620
	10	250	254	475	245	245	223	539.5	12	2 1/2	M64	750	775
	12	300	305	548	290	290	395	619	12	2 3/4	M70	855	885

JIS 10K

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
JIS 10K	-	40	60	88	40	42	1.5	105	4	-	M16	140	-
	-	50	60	103	51	55	2.2	120	4	-	M16	140	-
	-	65	67	123	65	68	3.1	140	4	-	M16	150	-
	-	80	73	133	80	82	4.3	150	8	-	M16	155	-
	-	100	73	158	102	108	6.3	175	8	-	M16	155	-
	-	125	86	189	127	130	8.4	210	8	-	M20	185	-
	-	150	98	219	152	165	12.6	240	8	-	M20	200	-
	-	200	127	269	203	220	24	290	12	-	M20	230	-
	-	250	146	332	254	270	40	355	12	-	M22	260	-
	-	300	181	377	320	325	66	400	16	-	M22	295	-
	-	350	184	422	337	350	83	445	16	-	M22	305	-
	-	400	191	484	387	400	102	510	16	-	M24	320	-
	-	450	203	539	438	438	124	565	20	-	M24	340	-
	-	500	219	594	495	495	150	620	20	-	M24	355	-
	-	600	222	698	595	595	203	730	24	-	M30	375	-
	-	700	305	808	685	685	380	840	24	-	M30	460	-
	-	750	305	868	735	735	413	900	24	-	M30	470	-
	-	800	305	918	780	780	580	950	28	-	M30	470	-
	-	900	368	1018	875	875	665	1050	28	-	M30	540	-
	-	1000	432	1122	975	975	880	1160	28	-	M36	620	-
	-	1200	524	1344	1165	1165	1470	1380	32	-	M36	720	-
	-	1350	568	1495	1320	1320	2100	1540	36	-	M42	790	-
	-	1500	629	1655	1460	1460	2950	1700	40	-	M42	860	-

JIS 20K

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
JIS 20K	-	40	60	88	40	42	1.8	105	4	-	M16	145	-
	-	50	60	103	51	55	2.5	120	8	-	M16	145	-
	-	65	67	123	65	68	4	140	8	-	M16	155	-
	-	80	73	139	80	82	5	160	8	-	M20	175	-
	-	100	73	164	102	108	7	185	8	-	M20	180	-
	-	125	86	202	127	130	11.2	225	8	-	M22	200	-
	-	150	98	237	152	165	16.5	260	12	-	M22	220	-
	-	200	127	282	203	220	31.5	305	12	-	M22	255	-
	-	250	146	355	254	270	49.5	380	12	-	M24	290	-
	-	300	181	405	305	320	81	430	16	-	M24	330	-
	-	350	222	449	337	343	117	480	16	-	M30X3	390	-
	-	400	232	509	387	400	158	540	16	-	M30X3	415	-
	-	450	264	574	438	438	200	605	20	-	M30X3	450	-
	-	500	292	629	495	495	285	660	20	-	M30X3	480	-
	-	600	318	733	595	595	390	770	24	-	M36X3	530	-
	-	700	368	853	685	685	586	900	24	-	M45X3	620	-
	-	750	368	916	735	735	696	970	24	-	M52X3	640	-
	-	800	368	976	780	780	986	1030	24	-	M52X3	650	-
	-	900	483	1085	875	875	1070	1140	28	-	M52X3	780	-

Dual Plate Wafer Valve

Main Outline Dimensions

PN 10

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
PN 10	-	50	60	108	51	55	2.2	125	4	-	M16	150	-
	-	65	67	128	65	68	3.1	145	4	-	M16	155	-
	-	80	73	142	80	82	4.3	160	8	-	M16	160	-
	-	100	73	162	102	108	6.3	180	8	-	M16	165	-
	-	125	86	192	127	130	8.4	210	8	-	M16	180	-
	-	150	98	218	152	165	12.6	240	8	-	M20	205	-
	-	200	127	273	203	220	24	295	8	-	M20	235	-
	-	250	146	328	254	270	40	350	12	-	M20	255	-
	-	300	181	378	305	320	66	400	12	-	M20	290	-
	-	350	184	438	337	350	83	460	16	-	M20	295	-
	-	400	191	489	387	400	102	515	16	-	M24	310	-
	-	450	203	539	438	438	124	565	20	-	M24	325	-
	-	500	219	594	495	495	150	620	20	-	M24	345	-
	-	600	222	696	595	595	203	725	20	-	M27	355	-
	-	700	305	811	685	685	380	840	24	-	M27	440	-
	-	800	305	918	780	780	580	950	24	-	M30	450	-
	-	900	368	1018	875	875	665	1050	28	-	M30	520	-
	-	1000	432	1124	975	975	880	1160	28	-	M33	590	-
	-	1200	524	1340	1165	1165	1470	1380	32	-	M36	695	-

PN 16

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
PN 16	-	50	60	108	51	55	2.2	125	4	-	M16	150	-
	-	65	67	128	65	68	3.1	145	4	-	M16	155	-
	-	80	73	142	80	82	4.3	160	8	-	M16	160	-
	-	100	73	162	102	108	6.3	180	8	-	M16	165	-
	-	125	86	192	127	130	8.4	210	8	-	M16	180	-
	-	150	98	218	152	165	12.6	240	8	-	M20	205	-
	-	200	127	273	203	220	24	295	12	-	M20	235	-
	-	250	146	329	254	270	40	355	12	-	M24	265	-
	-	300	181	384	305	320	66	410	12	-	M24	305	-
	-	350	184	444	337	350	83	470	16	-	M24	310	-
	-	400	191	496	387	400	102	525	16	-	M27	330	-
	-	450	203	556	438	438	124	585	20	-	M27	345	-
	-	500	219	618	495	495	150	650	20	-	M30	370	-
	-	600	222	732	595	595	203	770	20	-	M33	380	-
	-	700	305	802	685	685	380	840	24	-	M33	470	-
	-	800	305	912	780	780	580	950	24	-	M36	475	-
	-	900	368	1012	875	875	665	1050	28	-	M36	545	-
	-	1000	432	1126	975	975	880	1170	28	-	M39	620	-
	-	1200	524	1340	1165	1165	1470	1390	32	-	M45	735	-

PN 25

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
PN 25	-	50	60	108	51	55	2.2	125	4	-	M16	150	-
	-	65	67	128	65	68	3.1	145	8	-	M16	160	-
	-	80	73	142	80	82	4.3	160	8	-	M16	170	-
	-	100	73	168	102	108	6.3	190	8	-	M20	180	-
	-	125	86	194	127	130	8.4	220	8	-	M24	205	-
	-	150	98	224	152	165	13.5	250	8	-	M24	220	-
	-	200	127	284	203	220	26	310	12	-	M24	255	-
	-	250	146	341	254	270	43	370	12	-	M27	285	-
	-	300	181	401	305	320	70	430	16	-	M27	325	-
	-	350	184	458	337	350	90	490	16	-	M30	340	-
	-	400	191	515	387	400	110	550	16	-	M33	360	-
	-	450	203	565	438	438	135	600	20	-	M33	375	-
	-	500	219	622	495	495	158	660	20	-	M33	395	-
	-	600	222	732	595	595	220	770	20	-	M36	410	-
	-	700	305	831	685	685	400	875	24	-	M39	500	-
	-	800	305	942	780	780	600	990	24	-	M45	520	-
	-	900	368	1040	875	875	685	1090	28	-	M45	590	-
	-	1000	432	1155	975	975	900	1210	28	-	M52	675	-
	-	1200	524	1365	1165	1165	1510	1420	32	-	M52	790	-

Dual Plate Wafer Valve

Main Outline Dimensions

PN 40

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange Diameter Of Bolts		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Inch	Mm	RF	RJ
PN 40	-	50	60	108	51	55	2.5	125	4	-	M16	150	-
	-	65	67	128	65	68	4	145	8	-	M16	160	-
	-	80	73	142	80	82	5	160	8	-	M16	170	-
	-	100	73	168	102	108	7	190	8	-	M20	180	-
	-	125	86	194	127	130	11.2	220	8	-	M24	205	-
	-	150	98	224	152	165	16.5	250	8	-	M24	220	-
	-	200	127	291	203	220	31.5	320	12	-	M27	270	-
	-	250	146	353	254	270	49.5	385	12	-	M30	300	-
	-	300	181	418	305	320	81	450	16	-	M30	345	-
	-	350	222	475	337	343	117	510	16	-	M33	400	-
	-	400	232	547	387	400	158	585	16	-	M36	425	-
	-	450	264	572	438	438	200	610	20	-	M36	470	-
	-	500	292	626	495	495	285	670	20	-	M39	505	-
	-	600	318	745	595	595	380	795	20	-	M45	575	-

PN 63

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange Diameter Of Bolts		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Inch	Mm	RF	RJ
PN 63	-	50	60	114	51	55	2.5	135	4	-	M20	170	185
	-	65	67	138	65	68	4	160	8	-	M20	180	195
	-	80	73	148	80	82	5	170	8	-	M20	190	205
	-	100	79	174	102	108	9	200	8	-	M24	210	225
	-	125	105	211	127	130	14.5	240	8	-	M27	250	265
	-	150	136	248	152	165	27	280	8	-	M30	290	305
	-	200	165	310	200	210	48	345	12	-	M33	335	350
	-	250	213	362	250	255	93.5	400	12	-	M33	395	410
	-	300	229	422	300	300	114.5	460	16	-	M33	420	435
	-	350	273	487	335	335	187	525	16	-	M36	480	495
	-	400	305	541	385	385	261	585	16	-	M39	525	540

PN 100



Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange Diameter Of Bolts		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Inch	Mm	RF	RJ
PN 100	-	50	60	120	51	55	2.5	145	4	-	M24	185	200
	-	65	67	144	65	68	4	170	8	-	M24	195	210
	-	80	73	154	80	82	5	180	8	-	M24	205	220
	-	100	79	181	102	108	9	210	8	-	M27	225	240
	-	125	105	218	127	130	14.5	250	8	-	M30	265	280
	-	150	136	258	152	165	27	290	12	-	M30	305	320
	-	200	165	324	200	210	48	360	12	-	M33	355	370
	-	250	213	392	250	255	93.5	430	12	-	M36	425	440
	-	300	229	456	300	300	114.5	500	16	-	M39	465	480
	-	350	273	510	335	335	187	560	16	-	M45	535	550
	-	400	305	570	385	385	261	620	16	-	M45	585	600

PN 160

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange Diameter Of Bolts		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Inch	Mm	RF	RJ
PN 160	-	50	70	120	50	55	6	145	4	-	M24	210	225
	-	65	83	144	65	68	7.5	170	8	-	M24	235	250
	-	80	83	154	75	82	9.6	180	8	-	M24	245	260
	-	100	102	181	100	108	17	210	8	-	M27	280	295
	-	125	110	218	125	130	28	250	8	-	M30	305	320
	-	150	159	258	150	160	41	290	12	-	M30	365	385
	-	200	206	325	200	210	80	360	12	-	M33	425	445
	-	250	241	389	250	255	135	430	12	-	M39	495	515
	-	300	292	459	300	300	212	500	16	-	M39	570	600

Single Plate Wafer Check Valve

Single Wafer Check



Material List

BODY	DISC	BODY SEAT	DISC SEAT	SPRING	WETTED PARTS
A216 WCB / A105	A351 CF8	410SS / STELLITE	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A216 WCB / A105	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	Same as Body	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F51
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F53
UNS S31254	UNS S31254	Same as Body	Same as Disc	Inconel x-750	254-SMO
UNS N26625	UNS N26625	Same as Body	Same as Disc	Inconel x-750	Inconel 625

Main Outline Dimensions

Class 150

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange Diameter Of Bolts		Length Of Bolts	
	Nps	Dn	L	D	D	B				Inch	Mm	Rf	Rj
Class 150 Pn 20	1 1/2	40	60	85	30	12	1.5	98.5	4	1/2	M12	130	145
	2	50	60	103	38	20	2.2	120.5	4	5/8	M16	140	155
	2 1/2	65	67	122	45	28	3.1	139.5	4	5/8	M16	150	165
	3	80	73	135	56	35	4.3	152.5	4	5/8	M16	160	175
	4	100	73	173	76	55	6.3	190.5	8	5/8	M16	170	185
	5	125	86	195	96	73	8.4	216	8	3/4	M20	190	205
	6	150	98	221	120	90	12.6	241.5	8	3/4	M20	205	220
	8	200	127	277	165	105	24	298.5	8	3/4	M20	240	255
	10	250	146	337	195	122	40	362	12	7/8	M24	270	285
	12	300	181	407	241	130	66	432	12	7/8	M24	310	325
	14	350	184	448	267	155	83	476	12	1	M27	325	340
	16	400	191	512	318	165	102	540	16	1	M27	340	355
	18	450	203	547	356	205	124	578	16	1 1/8	M30	365	380
	20	500	219	604	387	245	150	635	20	1 1/8	M30	385	400
	24	600	222	715	483	320	203	749.5	20	1 1/4	M33	405	420

Single Plate Wafer Check Valve

Main Outline Dimensions

Class 300

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	d	B		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
Class 300 PN 50										Inch	Mm	RF	RJ
	11/2	40	60	94	30	12	1.8	114.5	4	3/4	M20	160	170
	2	50	60	110	38	20	2.5	127	8	5/8	M16	155	175
	2 1/2	65	67	128	45	28	4	149	8	3/4	M20	175	195
	3	80	73	147	56	35	5	168.5	8	3/4	M20	190	210
	4	100	73	179	76	55	7	200	8	3/4	M20	195	215
	5	125	86	214	96	73	11.2	235	8	3/4	M20	215	235
	6	150	98	249	120	90	16.5	270	12	3/4	M20	230	250
	8	200	127	305	165	105	31.5	330	12	7/8	M24	280	300
	10	250	146	359	195	122	49.5	387.5	16	1	M27	315	335
	12	300	181	420	241	130	81	451	16	1 1/8	M30	365	385
	14	350	222	483	267	155	117	514.5	20	1 1/8	M30	410	430
	16	400	232	537	318	165	158	571.5	20	1 1/4	M33	435	455
	18	450	264	594	356	205	200	628.5	24	1 1/4	M33	475	495
	20	500	292	652	387	245	285	686	24	1 1/4	M33	510	535

Class 600


Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	d	B		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
Class 600 PN 110										Inch	Mm	RF	RJ
	2	50	60	110	38	20	2.5	127	8	5/8	M16	175	180
	2 1/2	65	67	128	45	28	4	149	8	3/4	M20	195	200
	3	80	73	147	56	35	5	168.5	8	3/4	M20	210	215
	4	100	79	191	76	55	9	216	8	7/8	M24	235	240
	5	125	105	240	96	73	14.5	267	8	1	M27	280	285
	6	150	136	264	120	90	27	292	12	1	M27	320	325
	8	200	165	318	165	105	48	349	12	1 1/8	M30	370	375
	10	250	213	398	195	122	83.5	432	16	1 1/4	M33	440	445
	12	300	229	455	241	130	114.5	489	20	1 1/4	M33	460	465
	14	350	273	490	267	155	187	527	20	1 3/8	M36	520	525
	16	400	305	562	318	165	261	603	20	1 1/2	M39	575	580
	18	450	362	610	355	205	365	654	20	1 5/8	M42	650	655
	20	500	368	680	385	245	453	724	24	1 5/8	M42	670	680
	24	600	438	786	480	320	705	838	24	1 7/8	M48	780	790

Class 900

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	d	B		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
Class 900 PN 150										Inch	Mm	RF	RJ
	2	50	70	140	38	20	6	165	8	7/8	M24	225	230
	2 1/2	65	83	162	45	28	7.5	190.5	8	1	M27	250	255
	3	80	83	165	56	35	9.5	190.5	8	7/8	M24	240	245
	4	100	102	204	76	55	17	235	8	1 1/8	M30	285	290
	5	125	110	245	96	73	28	279.5	8	1 1/4	M33	310	315
	6	150	159	286	120	90	41	317.5	12	1 1/8	M30	365	370
	8	200	206	356	165	105	80	393.5	12	1 3/8	M36	440	445
	10	250	241	432	195	122	135	470	16	1 3/8	M36	490	495
	12	300	292	495	241	130	212	533.5	20	1 3/8	M36	560	565
	14	350	356	520	267	155	335	559	20	1 1/2	M39	645	655
	16	400	384	572	318	165	395	616	20	1 5/8	M42	685	695
	18	450	451	636	355	205	600	686	20	1 7/8	M48	790	800
	20	500	451	696	385	245	810	749.5	20	2	M52	810	820
	24	600	495	835	480	320	1030	901.5	20	2 1/2	M64	945	955

Single Plate Wafer (Thin) Check Valve

Thin Single Wafer Check

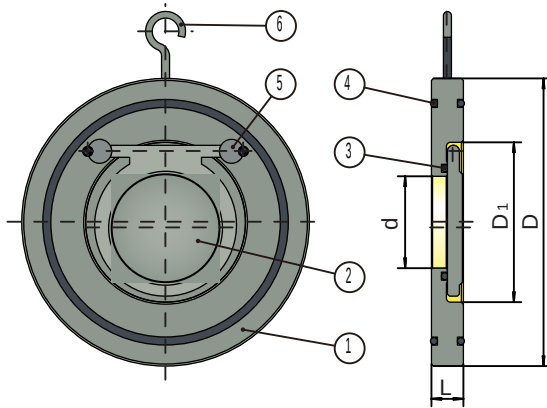

Material List

1.BODY	2.DISC	3.SEAT	4.BODY SEAL	5.HOLDER	6.EYE BOLT
A105	A351 CF8	VITON / BUNA/ EPDM / PTTE	VITON / BUNA/ EPDM / PTTE	A105	Carbon Steel
A182 / F304	A182 / F304	VITON / BUNA/ EPDM / PTTE	VITON / BUNA/ EPDM / PTTE	A182 / F304	Stainless Steel
A182 / F316	A182 / F316	VITON / BUNA/ EPDM / PTTE	VITON / BUNA/ EPDM / PTTE	A182 / F316	Stainless Steel
A182 / F304L	A182 / F304L	VITON / BUNA/ EPDM / PTTE	VITON / BUNA/ EPDM / PTTE	A182 / F304L	Stainless Steel
A182 / F316L	A182 / F316L	VITON / BUNA/ EPDM / PTTE	VITON / BUNA/ EPDM / PTTE	A182 / F316L	Stainless Steel

Main Outline Dimensions

PN 10

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	d	D1		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
PN 10	2	50	19	103	32	50	1.2	120.5	4	5/8	M16	100	
	2 1/2	65	19	122	42	65	1.6	139.5	4	5/8	M16	100	
	3	80	19	135	54	76	2.7	152.5	4	5/8	M16	105	
	4	100	19	173	77	100	3.2	190.5	8	5/8	M16	115	
	5	125	19	195	86	125	3.9	216	8	3/4	M20	125	
	6	150	19	221	112	150	4.5	241.5	8	3/4	M20	125	
	8	200	29	277	156	203	10	298.5	8	3/4	M20	140	
	10	250	29	337	204	254	15.2	362	12	7/8	M24	150	
	12	300	38	407	242	305	29.2	432	12	7/8	M24	165	
	14	350	44	448	270	335	42.5	476	12	1	M27	185	
	16	400	51	512	312	387	63.5	540	16	1	M27	200	
	18	450	60	547	360	438	80	578	16	1 1/8	M30	220	
	20	500	64	604	410	489	105	635	20	1 1/8	M30	230	
	24	600	64	715	490	591	160	749.5	20	1 1/4	M33	245	

Single Plate Wafer (Thin) Check Valve

Main Outline Dimensions

PN 10


Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange			
	Nps	Dn	L	D	d	D1				Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
PN 10	2	50	19	108	32	50	1.2	125	4	5/8	M16	110	
	2 1/2	65	19	128	42	65	1.6	145	4	3/4	M16	110	
	3	80	19	142	54	80	2.7	160	8	3/4	M16	110	
	4	100	19	162	77	100	3.2	180	8	7/8	M16	110	
	5	125	19	192	86	125	3.9	210	8	1	M16	115	
	6	150	19	218	112	150	4.5	240	8	1	M20	125	
	8	200	29	273	156	200	10	295	8	1 1/8	M20	135	
	10	250	29	328	204	250	15.2	350	12	1 1/4	M20	140	
	12	300	38	378	242	300	29.2	400	12	1 1/4	M20	150	
	14	350	44	438	270	350	42.5	460	16	1 3/8	M20	155	
	16	400	51	489	312	400	63.5	515	16	1 1/2	M24	170	
	18	450	60	539	360	450	80	565	20	1 5/8	M24	185	
	20	500	64	594	410	500	105	620	20	1 5/8	M24	190	
	24	600	64	696	490	600	160	725	20	1 7/8	M27	200	

PN 16

Pressure Class	Nominal Pipe Size		Dimension					Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange		Length Of Bolts	
	Nps	Dn	L	D	d	D1	Diameter Of Bolts				Length Of Bolts			
							Inch				Mm	RF	RJ	
PN 16	2	50	19	108	32	50	1.2	125	4		M16	110		
	2 1/2	65	19	128	42	65	1.6	145	4		M16	110		
	3	80	19	142	54	80	2.7	160	8		M16	110		
	4	100	19	162	77	100	3.2	180	8		M16	110		
	5	125	19	192	86	125	3.9	210	8		M16	115		
	6	150	19	218	112	150	4.5	240	8		M20	125		
	8	200	29	273	156	200	10	295	12		M20	135		
	10	250	29	329	204	250	15.2	355	12		M24	150		
	12	300	38	384	242	300	29.2	410	12		M24	165		
	14	350	44	444	270	350	42.5	470	16		M24	170		
	16	400	51	496	312	400	63.5	525	16		M27	190		
	18	450	60	556	360	450	80	585	20		M27	205		
	20	500	64	618	410	500	105	650	20		M30	215		
	24	600	64	732	490	600	160	770	20		M33	225		

Lift Type Wafer Check Valve

Lift Type Wafer Check

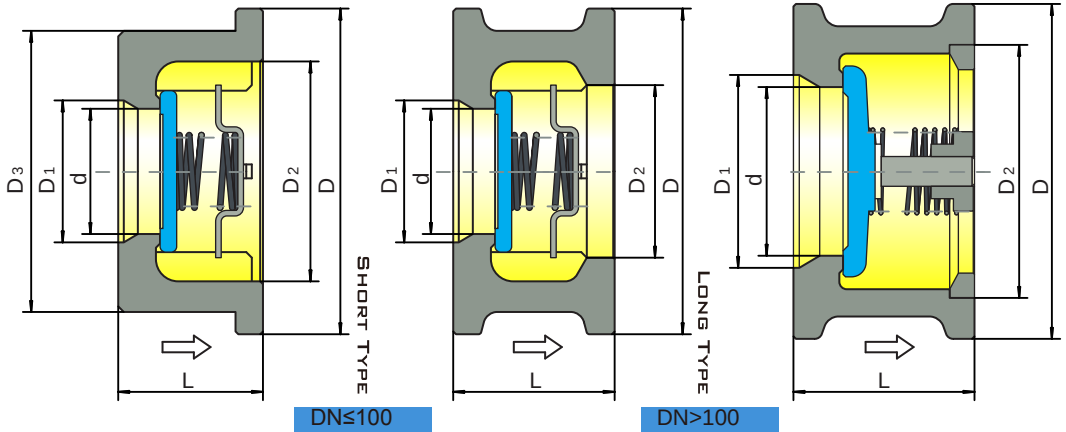

Material List

BODY	DISC	BODY SEAT	DISC SEAT	SPRING	WETTED PARTS
A216 WCB / A105	A351 CF8	410SS / STELLITE	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A216 WCB / A105	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	Same as Body	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F51
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F53
UNS S31254	UNS S31254	Same as Body	Same as Disc	Inconel x-750	254-SMO
UNS N26625	UNS N26625	Same as Body	Same as Disc	Inconel x-750	Inconel 625

Main Outline Dimensions

PN 150

Pressure Class	Nominal Pipe Size		Dimension					Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange		Length Of Bolts	
	Nps	Dn	L	D	D1	D2	Inch				Mm	Rf	Rj	
Class 150 PN 20	1/2	15	25	46	15	25	25	0.29	60.5	4	1/2	M14	90	-
	3/4	20	31.5	56	19	30	30	0.41	70	4	1/2	M14	100	-
	1	25	35.5	65	24	36	36	0.55	79.5	4	1/2	M14	105	120
	1 1/4	32	40	74	31	43	43	0.75	89	4	1/2	M14	115	130
	1 1/2	40	45	84	39	52	52	1.3	98.5	4	1/2	M14	120	135
	2	50	56	103	48	62	62	2.2	120.5	4	5/8	M16	140	155
	2 1/2	65	63	122	62	75	75	2.8	139.5	4	5/8	M16	155	170
	3	80	71	135	76	90	90	3.5	152.5	4	5/8	M16	165	180
	4	100	80	173	95	112	112	4.8	190.5	8	5/8	M16	175	190
	5	125	110	195	110	125	132	12.2	216.0	8	3/4	M20	210	225
	6	150	125	220	127	150	158	17.1	241.5	8	3/4	M20	230	245
	8	200	160	277	165	200	208	29.2	298.5	8	3/4	M20	270	285

Lift Type Wafer Check Valve

Main Outline Dimensions

Class 300

Pressure Class	Nominal Pipe Size		Dimension					Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange Diameter Of Bolts		Length Of Bolts	
	Nps	Dn	L	D	D	D1	D2				Inch	Mm	RF	RJ
Class 300 PN 50	1/2	15	25	52	15	25	25	0.29	66.5	4	1/2	M14	95	105
	3/4	20	31.5	65	19	30	30	0.45	82.5	4	5/8	M16	110	125
	1	25	35.5	72	24	36	36	0.6	89.0	4	5/8	M16	115	130
	1 1/4	32	40	81	31	43	43	0.8	98.5	4	5/8	M16	125	140
	1 1/2	40	45	94	39	52	52	1.5	114.5	4	3/4	M20	140	155
	2	50	56	110	48	62	62	2.5	127.0	8	5/8	M16	145	170
	2 1/2	65	63	128	62	75	75	3.1	149.0	8	3/4	M20	170	190
	3	80	71	147	76	90	90	4.2	168.5	8	3/4	M20	185	205
	4	100	80	179	95	112	112	5.5	200.0	8	3/4	M20	200	220
	5	125	110	214	110	125	132	13.2	235.0	8	3/4	M20	235	255
	6	150	125	249	127	150	158	21.9	270.0	12	3/4	M20	255	275
	8	200	160	305	165	200	208	35.8	330.0	12	7/8	M24	305	325

Class 600

pressure Class	Nominal pipe size		Dimension					Weight(kg)	Diameter of Bolts Circle	Number of Bolts	Pipe Flange Diameter of Bolts		Length of Bolts	
	NPS	DN	L	D	d	D1	D2				inch	mm	RF	RJ
Class 600 PN 110	1/2	15	25	52	15	25	25	0.45	66.5	4	1/2	M14	95	105
	3/4	20	31.5	65	19	30	30	0.82	82.5	4	5/8	M16	110	125
	1	25	35.5	72	24	36	36	1.1	89.0	4	5/8	M16	115	130
	1 1/4	32	40	81	31	43	43	1.3	98.5	4	5/8	M16	125	140
	1 1/2	40	45	94	39	52	52	1.8	114.5	4	3/4	M20	145	160
	2	50	56	110	48	62	62	2.8	127.0	8	5/8	M16	155	170
	2 1/2	65	63	128	62	75	75	4.1	149.0	8	3/4	M20	175	195
	3	80	71	147	76	90	90	6.2	168.5	8	3/4	M20	190	210
	4	100	80	191	95	112	112	10.8	216.0	8	7/8	M24	220	240
	5	125	110	239	110	125	132	25.2	267.0	8	1	M27	265	285
	6	150	125	264	127	150	158	32	292.0	12	1	M27	290	310
	8	200	160	318	165	200	208	52	349.0	12	1 1/8	M30	345	365

Class 900

pressure Class	Nominal pipe size		Dimension					Weight(kg)	Diameter of Bolts Circle	Number of Bolts	Pipe Flange Diameter of Bolts		Length of Bolts	
	NPS	DN	L	D	d	D1	D2				inch	mm	RF	RJ
Class 900 PN 150	1/2	15	25	52	15	25	25	0.45	66.5	4	1/2	M14	95	105
	3/4	20	31.5	65	19	30	30	0.82	82.5	4	5/8	M16	110	125
	1	25	35.5	72	24	36	36	1.1	89.0	4	5/8	M16	115	130
	1 1/4	32	40	81	31	43	43	1.3	98.5	4	5/8	M16	125	140
	1 1/2	40	45	94	39	52	52	1.8	114.5	4	3/4	M20	145	160
	2	50	56	110	48	62	62	2.8	127.0	8	5/8	M16	155	170
	2 1/2	65	63	128	62	75	75	4.1	149.0	8	3/4	M20	175	195
	3	80	71	147	76	90	90	6.2	168.5	8	3/4	M20	190	210
	4	100	80	191	95	112	112	10.8	216.0	8	7/8	M24	220	240
	5	125	110	239	110	125	132	25.2	267.0	8	1	M27	265	285
	6	150	125	264	127	150	158	32	292.0	12	1	M27	290	310
	8	200	160	318	165	200	208	52	349.0	12	1 1/8	M30	345	365

PN16~25(S)

pressure Class	Nominal pipe size		Dimension						Weight(kg)	Diameter of Bolts Circle	Number of Bolts	Pipe Flange		Length of Bolts	
	NPS	DN	L	D	d	D1	D2	D3				inch	mm	RF	RJ
PN 16 ~ 25	1	25	22	72	24	36	47	58	0.35	85	4	1/2	M12	90	-
	1 1/4	32	28	83	31	46	56	68	0.55	100	4	5/8	M16	110	-
	1 1/2	40	31.5	93	39	55	66	78	0.80	110	4	5/8	M16	115	-
	2	50	40	108	48	65	78	90	1.20	125	4	5/8	M16	125	-
	2 1/2	65	46	128	62	80	95	110	1.8	145	8	5/8	M16	135	-
	3	80	50	142	76	96	110	128	2.2	160	8	5/8	M16	145	-
	4	100	60	168	95	115	135	150	3.8	190	8	3/4	M20	160	-
	5	125	90	194	110	125	132	-	9.3	220	8	7/8	M24	205	-
	6	150	106	224	127	150	158	-	15	250	8	7/8	M24	225	-
	8	200	140	284	165	200	208	-	26	310	12	7/8	M24	260	-

Short Type

Lift Type Wafer Check Valve

Main Outline Dimensions

PN 40(S)

pressure Class	Nominal pipe size		Dimension							Weight(kg)	Diameter of Bolts Circle	Number of Bolts	Pipe Flange		Length of Bolts	
	NPS	DN	L	D	d	D1	D2	D3	inch				mm	RF	RJ	
PN 40	1	25	22	72	24	36	47	58	0.35	85	4	1/2	M12	90	-	-
	1 1/4	32	28	83	31	46	56	68	0.55	100	4	5/8	M16	110	-	-
	1 1/2	40	31.5	93	39	55	66	78	0.80	110	4	5/8	M16	115	-	-
	2	50	40	108	48	65	78	90	1.20	125	4	5/8	M16	125	-	-
	2 1/2	65	46	128	62	80	95	110	1.8	145	8	5/8	M16	135	-	-
	3	80	50	142	76	96	110	128	2.2	160	8	5/8	M16	145	-	-
	4	100	60	168	95	115	135	150	3.8	190	8	3/4	M20	160	-	-
	5	125	90	194	110	125	132	-	9.3	220	8	7/8	M24	205	-	-
	6	150	106	224	127	150	158	-	15	250	8	7/8	M24	225	-	-
8	200	140	284	165	200	208	-	26	310	12	7/8	M24	260	-	-	

Short Type

PN 10~16(L)

pressure Class	Nominal pipe size		Dimension						Weight(kg)	Diameter of Bolts Circle	Number of Bolts	Pipe Flange		Length of Bolts	
	NPS	DN	L	D	d	D1	D2	inch				mm	RF	RJ	
PN 10 – 16	1/2	15	25	52	15	25	25	0.3	65	4	-	M12	90	-	
	3/4	20	31.5	62	19	30	30	0.45	75	4	-	M12	100	-	
	1	25	35.5	72	24	36	36	0.6	85	4	-	M12	105	-	
	1 1/4	32	40	83	31	43	43	0.8	100	4	-	M16	115	-	
	1 1/2	40	45	93	39	52	52	1.4	110	4	-	M16	120	-	
	2	50	56	108	48	62	62	2.3	125	4	-	M16	140	-	
	2 1/2	65	63	128	62	75	75	3.0	145	4	-	M16	150	-	
	3	80	71	142	76	90	90	3.8	160	8	-	M16	155	-	
	4	100	80	162	95	112	112	5.0	180	8	-	M16	170	-	
	5	125	110	192	110	125	132	11	210	8	-	M16	200	-	
	6	150	125	218	127	150	158	16	240	8	-	M20	225	-	
	PN 10	8	200	160	273	165	200	208	28	295	8	-	M20	260	-
PN 16	8	200	160	273	165	200	208	28	295	12	-	M20	260	-	

Long Type

PN 25 (L)

pressure Class	Nominal pipe size		Dimension						Weight(kg)	Diameter of Bolts Circle	Number of Bolts	Pipe Flange		Length of Bolts	
	NPS	DN	L	D	d	D1	D2	inch				mm	RF	RJ	
PN 25	1/2	52	15	25	25	0.3	25	0.3	65	4	-	M12	90	-	
	3/4	62	19	30	30	0.45	30	0.45	75	4	-	M12	100	-	
	1	72	24	36	36	0.6	36	0.6	85	4	-	M12	105	-	
	1 1/4	83	31	43	43	0.8	43	0.8	100	4	-	M16	115	-	
	1 1/2	93	39	52	52	1.4	52	1.4	110	4	-	M16	120	-	
	2	108	48	62	62	2.3	62	2.3	125	4	-	M16	140	-	
	2 1/2	128	62	75	75	3.0	75	3.0	145	8	-	M16	150	-	
	3	142	76	90	90	3.8	90	3.8	160	8	-	M16	165	-	
	4	168	95	112	112	5.2	112	5.2	190	8	-	M20	180	-	
	5	194	110	125	132	11.8	132	11.8	220	8	-	M24	225	-	
	6	224	127	150	158	18	158	18	250	8	-	M24	245	-	
	8	200	160	284	165	200	208	30	310	12	-	M24	285	-	


Long Type

PN 40 (L)

pressure Class	Nominal pipe size		Dimension					Weight(kg)	Diameter of Bolts Circle	Number of Bolts	Pipe Flange		Length of Bolts	
	NPS	DN	L	D	d	D1	D2				inch	mm	RF	RJ
PN 40	1/2	15	25	52	15	25	25	0.3	65	4	-	M12	90	-
	3/4	20	31.5	62	19	30	30	0.45	75	4	-	M12	100	-
	1	25	35.5	72	24	36	36	0.6	85	4	-	M12	105	-
	1 1/4	32	40	83	31	43	43	0.8	100	4	-	M16	115	-
	1 1/2	40	45	93	39	52	52	1.4	110	4	-	M16	120	-
	2	50	56	108	48	62	62	2.3	125	4	-	M16	140	-
	2 1/2	65	63	128	62	75	75	3.0	145	8	-	M16	150	-
	3	80	71	142	76	90	90	3.8	160	8	-	M16	165	-
	4	100	80	168	95	112	112	5.2	190	8	-	M20	180	-
	5	125	110	194	110	125	132	13	220	8	-	M24	225	-
	6	150	125	224	127	150	158	19	250	8	-	M24	245	-
	8	200	160	291	165	200	208	32	320	12	-	M24	285	-

Long Type

Tilting Wafer Check

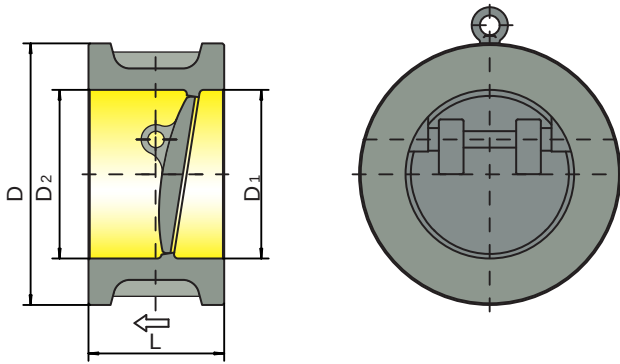

Material List

BODY	DISC	BODY SEAT	DISC SEAT	SPRING	WETTED PARTS
A216 WCB / A105	A351 CF8	410SS / STELLITE	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	410 SS
A216 WCB / A105	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A216 WCB / A105	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	316SS / STELLITE	Same as Disc	Inconel x-750	316 SS
A352 LCC / A350 LF2	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	Same as Body	Same as Disc	Inconel x-750	316 SS
A351 CF8M / A182 F316	A351 CF8M	VITON / BUNA-N / EPDM	Same as Disc	Inconel x-750	316 SS
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F51
A890 GR 4A	A890 GR 4A	Same as Body	Same as Disc	Inconel x-750	A182 F53
UNS S31254	UNS S31254	Same as Body	Same as Disc	Inconel x-750	254-SMO
UNS N26625	UNS N26625	Same as Body	Same as Disc	Inconel x-750	Inconel 625

Main Outline Dimensions

Class 150

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange			
	Nps	Dn	L	D	D1	D2				Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 150 PN 20	2	50	60	103	51	51	2.2	120.5	4	5/8	M16	140	155
	2 1/2	65	67	122	65	65	3.1	139.5	4	5/8	M16	150	165
	3	80	73	135	76	76	4.3	152.5	4	5/8	M16	160	175
	4	100	73	173	102	102	6.3	190.5	8	5/8	M16	170	185
	5	125	86	195	127	127	8.4	216	8	3/4	M20	190	205
	6	150	98	221	152	152	12.6	241.5	8	3/4	M20	205	220
	8	200	127	277	203	203	24	298.5	8	3/4	M20	240	255
	10	250	146	337	254	254	40	362	12	7/8	M24	270	285
	12	300	181	407	305	305	66	432	12	7/8	M24	310	325
	14	350	184	448	337	337	83	476	12	1	M27	325	340
	16	400	191	512	387	387	102	540	16	1	M27	340	355
	18	450	203	547	438	438	124	578	16	1 1/8	M30	365	380
	20	500	219	604	489	489	150	635	20	1 1/8	M30	385	400
	24	600	222	715	591	591	203	749.5	20	1 1/4	M33	405	420

Tilting Wafer Check Valve

Main Outline Dimensions

Class 300

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange		Diameter Of Bolts		Length Of Bolts	
	Nps	Dn	L	D	D1	D2				Inch	Mm	Rf	Rj		
Class 300 PN 50	2	50	60	110	51	51	2.5	127	8	5/8	M16	155	175		
	2 1/2	65	67	128	65	65	4	149	8	3/4	M20	175	195		
	3	80	73	147	76	76	5	168.5	8	3/4	M20	190	210		
	4	100	73	179	102	102	7	200	8	3/4	M20	195	215		
	5	125	86	214	127	127	11.2	235	8	3/4	M20	215	235		
	6	150	98	249	152	152	16.5	270	12	3/4	M20	230	250		
	8	200	127	305	203	203	31.5	330	12	7/8	M24	280	300		
	10	250	146	359	254	254	49.5	387.5	16	1	M27	315	335		
	12	300	181	420	305	305	81	451	16	1 1/8	M30	365	385		
	14	350	222	483	337	337	117	514.5	20	1 1/8	M30	410	430		
	16	400	232	537	387	387	158	571.5	20	1 1/4	M33	435	455		
	18	450	264	594	438	438	200	628.5	24	1 1/4	M33	475	495		
	20	500	292	652	489	489	285	686	24	1 1/4	M33	510	535		
	24	600	318	772	591	591	380	813	24	1 1/2	M39	560	585		

Class 600

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange			
	Nps	Dn	L	D	D1	D2				Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	Rf	Rj
Class 600 PN 110	2	50	60	110	51	51	2.5	127	8	5/8	M16	175	180
	2 1/2	65	67	128	65	65	4	149	8	3/4	M20	195	200
	3	80	73	147	76	76	5	168.5	8	3/4	M20	210	215
	4	100	79	191	102	102	9	216	8	7/8	M24	235	240
	5	125	105	240	127	127	14.5	267	8	1	M27	280	285
	6	150	136	264	152	152	27	292	12	1	M27	320	325
	8	200	165	318	203	203	48	349	12	1 1/8	M30	370	375
	10	250	213	398	254	254	93.5	432	16	1 1/4	M33	440	445
	12	300	229	455	305	305	114.5	489	20	1 1/4	M33	460	465
	14	350	273	490	337	337	187	527	20	1 3/8	M36	520	525
	16	400	305	562	387	387	261	603	20	1 1/2	M39	575	580
	18	450	362	610	438	438	365	654	20	1 5/8	M42	650	655
	20	500	368	680	489	489	453	724	24	1 5/8	M42	670	680
	24	600	438	786	591	591	705	838	24	1 7/8	M48	780	790

Class 900

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Diameter Of Bolts Circle	Number Of Bolts	Pipe Flange			
	Nps	Dn	L	D	D1	D2				Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 900 PN 150	2	50	70	140	50	50	6	165	8	7/8	M24	225	230
	2 1/2	65	83	162	65	65	7.5	190.5	8	1	M27	250	255
	3	80	83	165	75	75	9.6	190.5	8	7/8	M24	240	245
	4	100	102	204	100	100	17	235	8	1 1/8	M30	285	290
	5	125	110	245	125	125	28	279.5	8	1 1/4	M33	310	315
	6	150	159	286	150	150	41	317.5	12	1 1/8	M30	365	370
	8	200	206	356	201	201	80	393.5	12	1 3/8	M36	440	445
	10	250	241	432	252	252	135	470	16	1 3/8	M36	490	495
	12	300	292	495	303	303	212	533.5	20	1 3/8	M36	560	565
	14	350	356	520	325	325	335	559	20	1 1/2	M39	645	655
	16	400	384	572	375	375	395	616	20	1 5/8	M42	685	695
	18	450	451	636	425	425	600	686	20	1 7/8	M48	790	800
	20	500	451	696	475	475	810	749.5	20	2	M52	810	820
	24	600	495	835	570	570	1030	901.5	20	2 1/2	M64	945	955

Class 1500

Pressure Class	Nominal Pipe Size		Dimension				Weight(Kg)	Pipe Flange					
	Nps	Dn	L	D	D1	D2		Diameter Of Bolts Circle	Number Of Bolts	Diameter Of Bolts		Length Of Bolts	
										Inch	Mm	RF	RJ
Class 1500 PN 260	2	50	70	140	50	50	6	165	8	7/8	M24	225	230
	2 1/2	65	83	162	65	65	7.5	190.5	8	1	M27	250	255
	3	80	83	172	75	75	9.6	203	8	7/8	M30	270	275
	4	100	102	208	100	100	17	241.5	8	1 1/4	M33	310	315
	5	125	110	252	125	125	38	292	8	1 1/2	M39	370	375
	6	150	159	281	150	150	50	317.5	12	1 3/8	M36	430	440
	8	200	206	350	195	195	96	393.5	12	1 5/8	M42	510	520
	10	250	248	433	245	245	176	482.5	12	1 7/8	M48	600	610
	12	300	305	518	290	290	287	517.5	16	2	M52	695	710
	14	350	356	576	320	320	433	635	16	2 1/4	M56	775	790
	16	400	384	640	365	365	590	705	16	2 1/2	M64	850	870
	18	450	468	703	410	410	780	774.7	16	2 3/4	M70	970	990
	20	500	533	754	456	456	1250	831.8	16	3	M76	1080	1100
	24	600	559	898	550	550	2700	990.6	16	3 1/2	M88	1190	1210