


OMS-100 Gate Valves

High Performance Gate Valves

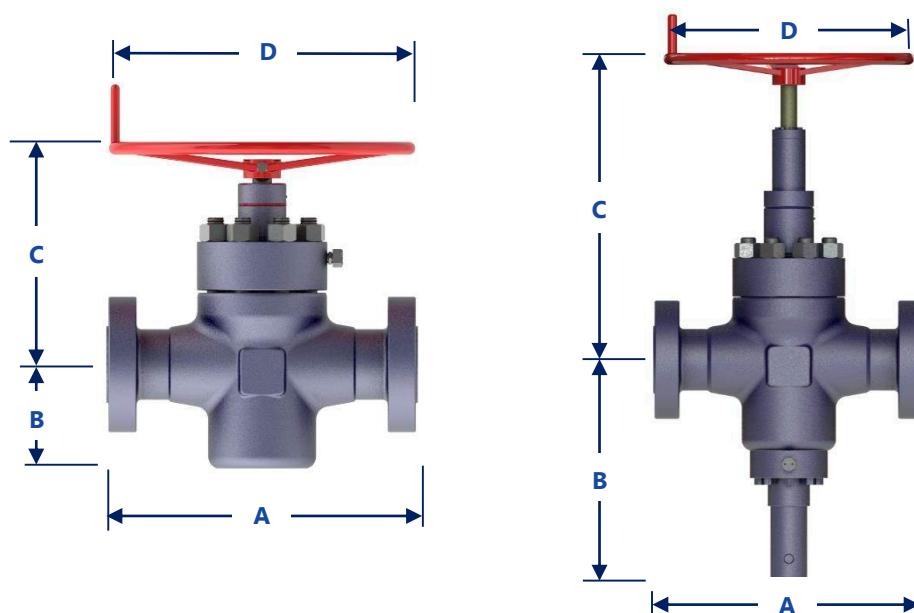

GATE VALVE DIMENSIONS

Bore Size	Pressure (Psi)	A		B		C		D		Weight		Number of Turns
		Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs	Kg	
1-13/16"	10,000	18.25	464	5.69	145	14.50	368	14.00	356	230	104	12
	15,000	18.00	457	5.88	149	14.50	368	14.00	356	270	122	12
2-1/16"	2,000	11.62	295	5.25	133	12.75	324	10.00	254	110	50	14
	3,000 / 5,000	14.62	371	5.50	140	12.75	324	14.00	356	170	77	14
	10,000	20.50	571	5.75	146	14.38	365	18.50	470	260	118	14
	15,000	19.00	483	6.00	152	16.75	425	18.50	470	290	132	14
2-9/16"	2,000	13.12	333	6.12	155	15.00	381	10.00	254	160	73	18
	3,000 / 5,000	16.62	422	7.00	178	15.00	381	14.00	356	240	109	18
	10,000	22.25	565	7.00	178	17.50	445	18.50	470	370	168	18
	15,000	21.00	533	7.88	200	18.50	470	18.50	470	550	249	18
3-1/8"	2,000	14.12	357	7.12	181	16.75	425	14.00	356	220	100	22
	3,000	17.12	435	7.50	191	16.75	425	14.00	356	270	122	22
	5,000	18.62	473	7.50	191	16.75	425	18.50	470	330	150	22
3-1/16"	10,000	24.38	619	8.13	207	17.50	445	24.00	610	490	222	22
	15,000	23.56	598	9.25	235	21.50	546	24.00	610	830	376	26
4-1/16"	2,000	17.12	435	9.25	235	19.25	489	18.50	470	380	172	27
	3,000	20.12	511	9.25	235	19.25	489	18.50	470	500	227	27
	5,000	21.62	549	9.25	235	19.25	489	18.50	470	600	272	27
	10,000	26.38	670	10.12	257	20.75	527	24.00	610	810	367	27
5-1/8"	3,000	24.12	613	11.50	292	21.00	533	24.00	610	950	431	30
	5,000	28.62	727	11.50	292	22.50	572	24.00	610	1,050	476	30
6-3/8"	3,000	24.12	613	13.00	330	24.00	610	24.00	610	1,000	454	35
	5,000	29.00	737	13.00	330	24.00	610	24.00	610	1,200	544	35
7-1/16"	3,000	28.12	714	14.75	375	29.50	749	40.00	1,016	1,750	794	45
	5,000	32.00	813	14.75	375	29.50	749	40.00	1,016	1,960	889	45
9"	5,000	41.00	1,041	20.12	511	38.00	965	40.00	1,016	3,950	1,792	60

DUAL STEM GATE VALVE DIMENSIONS

Bore Size	Pressure (Psi)	A		B		C		D		Weight		Number of Turns
		Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs	Kg	
4-1/16"	15,000	29.00	737	25.00	635	40.50	1,029	24.00	610	1525	692	20
5-1/8"	10,000	29.00	737	26.88	683	42.25	1,073	24.00	610	1550	703	24
	15,000	35.00	889	26.88	683	42.25	1,073	34.00	864	3200	1451	24
6-3/8"	10,000	35.00	889	30.00	762	48.00	1,219	34.00	864	2950	1338	29
7-1/16"	10,000	35.00	889	30.00	762	48.00	1,219	34.00	864	4250	1928	30

NOTES:

- Other sizes not listed above are available upon request.
- Specifications are subject to change without notice.

API 6A MATERIAL CLASS OPTIONS

Standard Valve Parts Materials

Valve Part Description	API 6A MATERIAL CLASS								
	General Service			Sour Service (as defined by NACE MR0175)					
	AA	BB	CC	DD-NL	EE-1.5	EE-NL	FF-1.5	FF-NL	HH-NL
Body and Bonnet	AISI 4130 Low Alloy Steel	AISI 4130 Low Alloy Steel	AISI 410 or F6NM Stainless Steel	AISI 4130 Low Alloy Steel	AISI 4130 Low Alloy Steel	AISI 4130 Low Alloy Steel	AISI 410 or F6NM Stainless Steel	AISI 410 or F6NM Stainless Steel	AISI 4130 Low Alloy Steel w/ Inconel 625 Overlay
Gate and Seat	AISI 41XX Low Alloy Steel w/ Hard Facing	AISI 410 or F6NM Stainless Steel w/ Hard Facing	AISI 410 or F6NM Stainless Steel w/ Hard Facing	AISI 41XX Low Alloy Steel w/ Hard Facing	AISI 410 or F6NM Stainless Steel w/ Hard Facing	AISI 410 or F6NM Stainless Steel w/ Hard Facing	AISI 410 or F6NM Stainless Steel w/ Hard Facing	AISI 410 or F6NM Stainless Steel w/ Hard Facing	Inconel 625 or 718, w/ Hard Facing
Stem	AISI 41XX Low Alloy Steel, Nitrided	AISI 410 or F6NM Stainless Steel, Nitrided	AISI 410 or F6NM Stainless Steel, Nitrided	AISI 41XX Low Alloy Steel, Nitrided	AISI 410 or F6NM Stainless Steel, Nitrided	Inconel 718, Xylan Coated	AISI 410 or F6NM Stainless Steel, Nitrided	Inconel 718, Xylan Coated	Inconel 718, Xylan Coated
Gate Nut	AISI 410 Stainless Steel	AISI 410 Stainless Steel	AISI 410 Stainless Steel	AISI 410 Stainless Steel	AISI 410 Stainless Steel	AISI 410 Stainless Steel	AISI 410 Stainless Steel	AISI 410 Stainless Steel	Inconel 625 or 718
Stem Packing	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring	PEEK w/ Moly PTFE, Elgiloy Spring
Seat Seals	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring	PEEK, Elgiloy Spring
Bonnet Gasket	AISI 316 Stainless Steel	AISI 316 Stainless Steel	AISI 316 Stainless Steel	AISI 316 Stainless Steel	AISI 316 Stainless Steel	AISI 316 Stainless Steel	AISI 316 Stainless Steel	AISI 316 Stainless Steel	Inconel 825
Bonnet Cap, Stem Adapter, and Packing Gland	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel	AISI 41XX Low Alloy Steel
Bolts	ASTM A193/A193M GR B7	ASTM A193/A193M GR B7	ASTM A193/A193M GR B7	ASTM A193/A193M GR B7M	ASTM A193/A193M GR B7M	ASTM A193/A193M GR B7M	ASTM A193/A193M GR B7M	ASTM A193/A193M GR B7M	ASTM A193/A193M GR B7M
Nuts	ASTM A194/A194M GR 2H	ASTM A194/A194M GR 2H	ASTM A194/A194M GR 2H	ASTM A194/A194M GR 2HM	ASTM A194/A194M GR 2HM	ASTM A194/A194M GR 2HM	ASTM A194/A194M GR 2HM	ASTM A194/A194M GR 2HM	ASTM A194/A194M GR 2HM

NOTES:

1.	Valve component materials and coatings listed are for standard offering. Special material and/or coating are available on request.
2.	Sour service is as defined by NACE MR0175/ISO 15156. Suffixes used in material class is referring to the H2S partial pressure (Psia)
3.	Temperature ranges: -75 to 350 °F (-60 to 180 °C)
4.	PSL levels available: PSL 1, PSL 2, PSL 3, and PSL 4
5.	Valve available in various types of end connection: flange, studed, threaded and quick union.
6.	Specifications are subject to change without notice.
7.	ASTM A453/A453M GR660 bolts are required for selected sizes and pressure ratings.

OMS-HA and OMS-HAW ACTUATORS

Hydraulic Actuators

OMS-HA and OMS-HAW Hydraulic Actuator Features

Fail-safe design

Both actuators are design for a fail-safe application. OMS-HA is the standard actuator offering. OMS-HAW comes with double coil springs for wireline cutting valve application.

Flexibility

OMS-HA and OMS-HAW actuators can be adapted to various sizes of OMS-100 manual gate valves. The manual and actuated valves use the same valve body, seats, and seals, providing greater interchangeability.

Backseat Capability

OMS-HA and OMS-HAW actuators come with a gas tight, metal-to-metal backseat on stem and bonnet. The grease fitting is located downstream of the stem's backseat area, provides safe pressure monitoring and venting during maintenance.

Stem Packing

Stem packing is identical with the OMS-100 gate valve, and it has been tested passed the API 6A PR2 Annex F test.

Reliability and Durability


Piston and actuator components are externally and internally coated for corrosion protection. Weather seals enclose the actuator can, ensuring minimum environmental exposure. The seals and actuator assembly have been tested and passed the API 6A PR2 Annex F test.

Ease of Maintenance

All non-metallic seals are field replaceable, without the need of special tooling.

Optional Accessories

- Fusible Lock Open Cap, Lock Cap
- Manual override
- Limit switches and position indicators

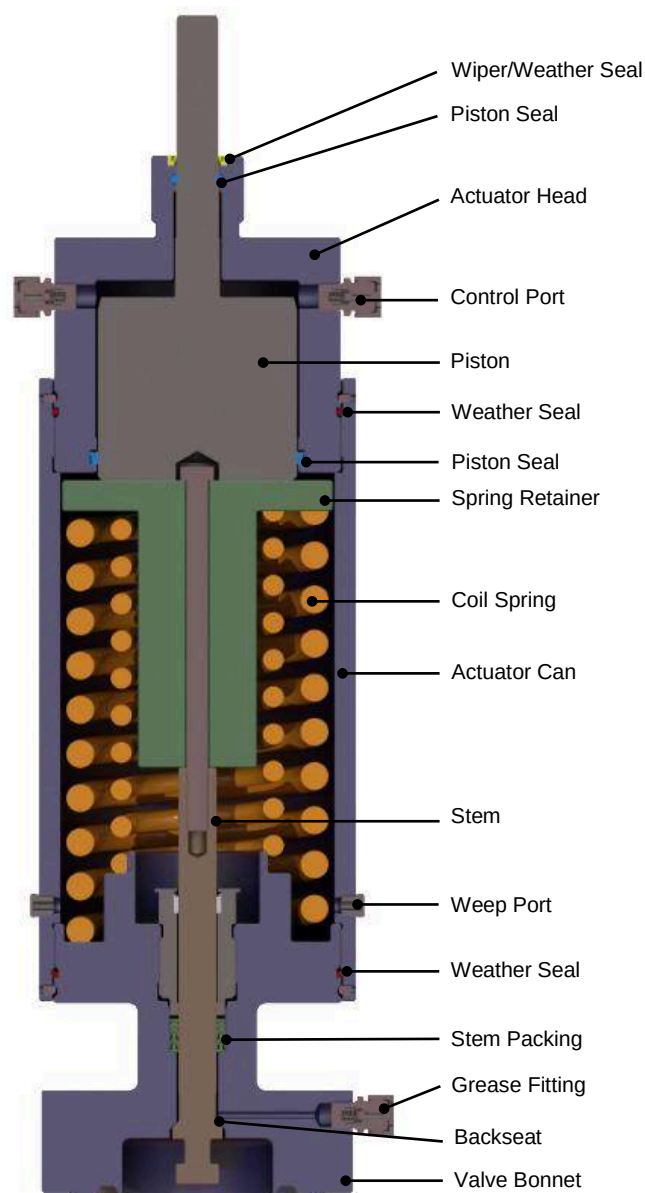

OMS-HAW Actuator

OMS-100 Solid Block Tree, with OMS-HA Actuators on the Upper Master and Wing Valves

