


BOLTED BONNET HEAVY WALL API-600 WEDGE GATE COMPONENTS

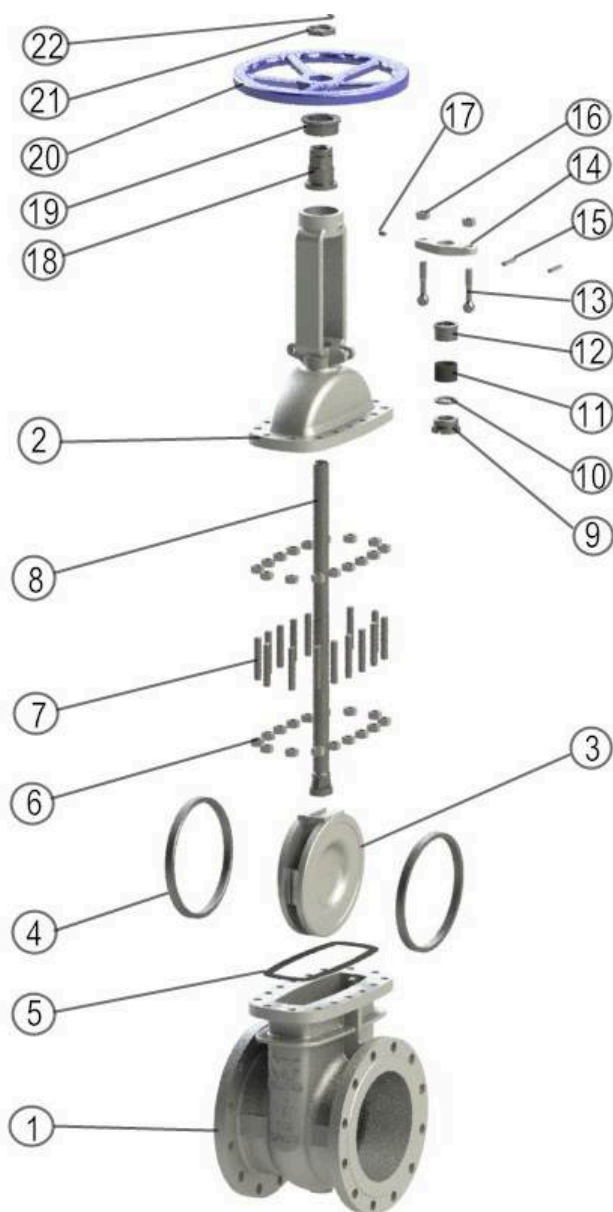


ITEM NO.	PART NAME
1	Body
2	Bonnet
3	Wedge
4	Seat Ring
5	Gasket
6	Nut
7	Stud
8	Stem
9	Back Seat
10	Spacer Ring
11	Packing
12	Gland
13	Eye Bolt
14	Gland Flange
15	Pin
16	Nut
17	Grease Fitting
18	Stem Nut
19	Yoke Cap
20	Handwheel
21	Handwheel Nut
22	Locking Screw

GATE VALVE API-600

FIG NO. 15F FLANGED
FIG NO. 15W BUTT WELD
FIG NO. 15R RTJ

BOLTED BONNET WEDGE GATE CL150

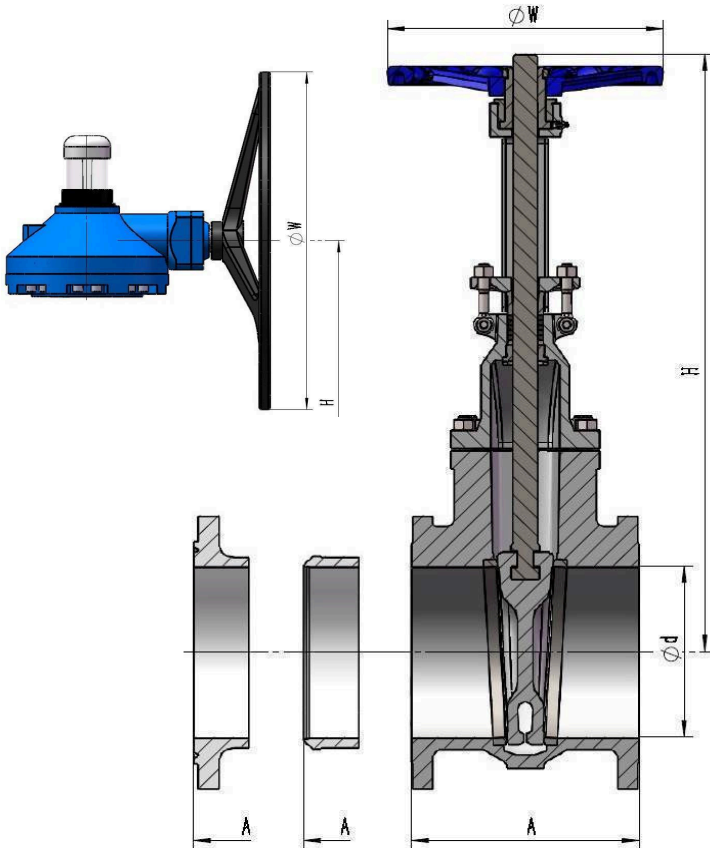

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-624 Certified, API-622 Packing

CONSTRUCTION: OS&Y rising stem
Flexible split wedge
Renewable seat ring
Bolted Bonnet
10" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Other trims available upon request

OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc

ASME CLASS 150

DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)																
			2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24	30	36
A	RF	mm	178	190	203	229	254	267	292	330	356	381	406	432	457	508	610	711
		in	7.01	7.48	7.99	9.02	10	10.51	11.5	12.99	14.02	15	15.98	17.01	17.99	20	24.02	27.99
	RTJ	mm	191	203	216	242	267	280	305	343	369	394	419	445	470	521		
		in	7.52	7.99	8.5	9.53	10.51	11.02	12.01	13.5	14.53	15.51	16.5	17.52	18.5	20.51		
	BW	mm	216	241	282	305	381	403	419	457	502	572	610	660	711	813	914	1016
		in	8.5	9.49	11.1	12.01	15	15.87	16.5	17.99	19.76	22.52	24.02	25.98	27.99	32.01	35.98	40
	d	mm	51	64	76	102	127	152	203	254	305	337	387	438	489	591	743	876
		in	2.01	2.52	2.99	4.02	5	5.98	7.99	10	12.01	13.27	15.24	17.24	19.25	23.27	29.25	34.49
H	Open	mm	388	434	483	585	678	768.5	958	1155	1343.5	1526	1722	1899	2124.5	2480.5		
		in	15.28	17.09	19.02	23.03	26.69	30.26	37.72	45.47	52.89	60.08	67.8	74.76	83.64	97.66		
	Closed	mm	328	359	399	472	538	600	740	883	1020	1157	1313	1441	1612	1867		
		in	12.91	14.13	15.71	18.58	21.18	23.62	29.13	34.76	40.16	45.55	51.69	56.73	63.46	73.5		
	Gearbox	mm						612	750	916	1035	1168	1303	1441	1598	1865	2325	2689
		in						24.09	29.53	36.06	40.75	45.98	51.3	56.73	62.91	73.43	91.54	105.87
W	Handwheel	mm	200	200	250	250	300	300	350	400	450	500	560	640	640	720		
		in	7.87	7.87	9.84	9.84	11.81	11.81	13.78	15.75	17.72	19.69	22.05	25.2	25.2	28.35		
	Gearbox	mm						310	310	310	460	460	460	610	610	610	710	800
		in						12.2	12.2	12.2	18.11	18.11	18.11	24.02	24.02	24.02	27.95	31.5
Weight	RF/RTJ	kg	20	26	34	50	68	80	116	180	254	405	540	638	800	1200	2035	3645
		lb	44	57.2	74.8	110	149.6	176	255.2	396	558.8	891	1188	1403.6	1760	2640	4477	8019


BOLTED BONNET HEAVY WALL API-600 WEDGE GATE DATA



GATE VALVE API-600

FIG NO. 30F FLANGED
FIG NO. 30W BUTT WELD
FIG NO. 30R RTJ

BOLTED BONNET WEDGE GATE CL300

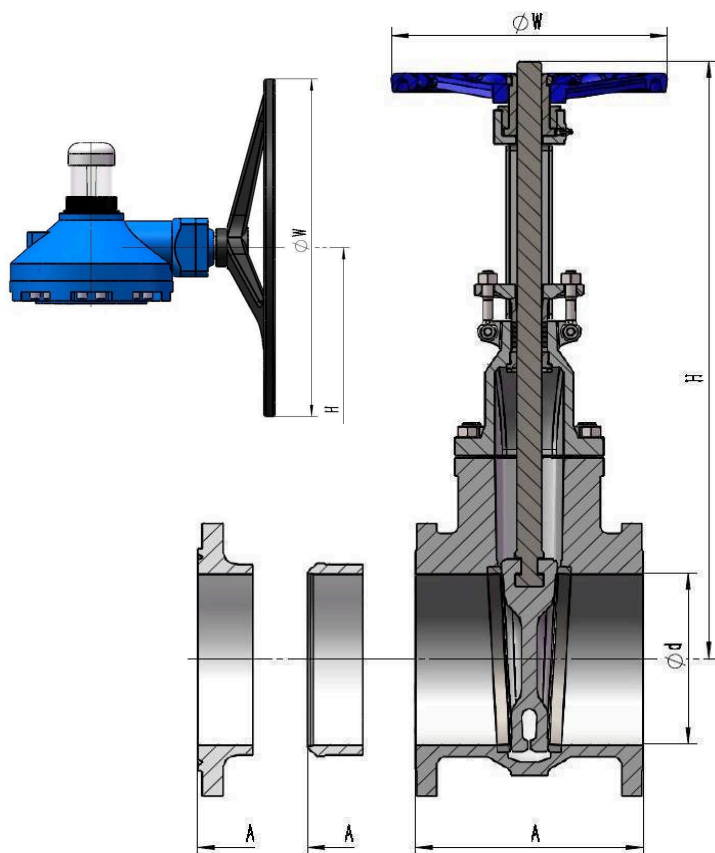

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-624 Certified, API-622 Packing

CONSTRUCTION: OS&Y rising stem
Flexible split wedge
Renewable seat ring
Bolted Bonnet
10" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Other trims available upon request


OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc

ASME CLASS 300																
DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)														
			2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24
A	RF	mm	216	241	282	305	381	403	419	457	502	762	838	914	991	1143
		in	8.5	9.49	11.1	12.01	15	15.87	16.5	17.99	19.76	30	32.99	35.98	39.02	45
	RTJ	mm	232	257	298	321	397	419	435	473	518	778	854	930	1010	1165
		in	9.13	10.12	11.73	12.64	15.63	16.5	17.13	18.62	20.39	30.63	33.62	36.61	39.76	45.87
d	BW	mm	216	241	282	305	381	403	419	457	502	762	838	914	991	1143
		in	8.5	9.49	11.1	12.01	15	15.87	16.5	17.99	19.76	30	32.99	35.98	39.02	45
		mm	51	64	76	102	127	152	203	254	305	337	387	432	483	584
		in	2.01	2.52	2.99	4.02	5	5.98	7.99	10	12.01	13.27	15.24	17.01	19.02	22.99
H	Open	mm	420	451	530	618	703	797.5	982.5	1193	1403	1546	1725.5	1938		
		in	16.54	17.76	20.87	24.33	27.68	31.4	38.68	46.97	55.24	60.87	67.93	76.3		
	Closed	mm	355	371	436	504	564	627	764	917	1080	1191	1309	1486		
		in	13.98	14.61	17.17	19.84	22.2	24.69	30.08	36.1	42.52	46.89	51.54	58.5		
W	Gearbox	mm						640	797	928	1082	1180	1320	1485	1620	1900
		in						25.2	31.38	36.54	42.6	46.46	51.97	58.46	63.78	74.8
	Handwheel	mm	200	200	250	250	300	350	400	450	500	560	640	640		
		in	7.87	7.87	9.84	9.84	11.81	13.78	15.75	17.72	19.69	22.05	25.2	25.2		
Weight	Gearbox	mm						310	310	460	460	460	610	610	610	710
		in						12.2	12.2	18.11	18.11	18.11	24.02	24.02	24.02	27.95
	RF/RTJ	kg	26	35	52	74	102	125	210	350	459	683	950	1205	1480	2660
		lb	57.2	77	114.4	162.8	224.4	275	462	770	1009.8	1502.6	2090	2651	3256	5852

GATE VALVE API-600

FIG NO. 60F FLANGED
FIG NO. 60W BUTT WELD
FIG NO. 60R RTJ

BOLTED BONNET WEDGE GATE CL600

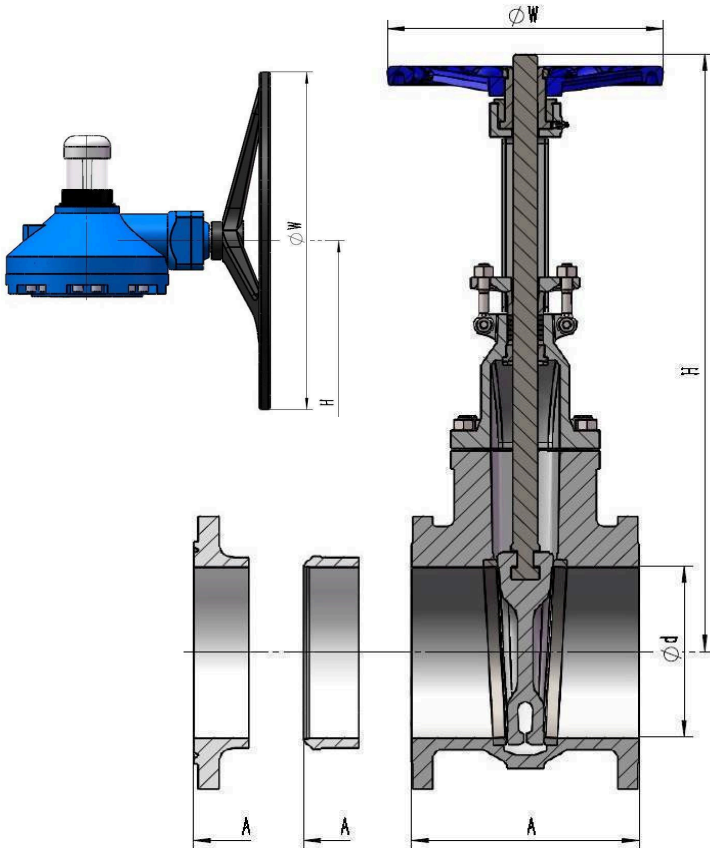

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-624 Certified, API-622 Packing

CONSTRUCTION: OS&Y rising stem
Flexible split wedge
Renewable seat ring
Bolted Bonnet
10" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Other trims available upon request

OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc

ASME CLASS 600																	
DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)															
			2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24	
A	RF	mm	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	
		in	11.5	12.99	14.02	17.01	20	22.01	25.98	30.98	32.99	35	39.02	42.99	47.01	55	
	RTJ	mm	295	333	359	435	511	562	663	790	841	892	994	1095	1200	1407	
		in	11.61	13.11	14.13	17.13	20.12	22.13	26.1	31.1	33.11	35.12	39.13	43.11	47.24	55.39	
	BW	mm	292	330	356	432	508	559	660	787	838	889	991	1092	1194	1397	
		in	11.5	12.99	14.02	17.01	20	22.01	25.98	30.98	32.99	35	39.02	42.99	47.01	55	
	d		mm	51	64	76	102	127	152	200	248	298	327	375	419	464	559
			in	2.01	2.52	2.99	4.02	5	5.98	7.87	9.76	11.73	12.87	14.76	16.5	18.27	22.01
Open		mm	437	504	542	652.5	748	883.5	1064	1249	1488						
		in	17.2	19.84	21.34	25.69	29.45	34.78	41.89	49.17	58.58						
Closed		mm	370	425	454	547	598	716	844	980	1162						
		in	14.57	16.73	17.87	21.54	23.54	28.19	33.23	38.58	45.75						
Gearbox		mm							681	845	980	1144	1297	1398	1493	1648	1957
		in							26.81	33.27	38.58	45.04	51.06	55.04	58.78	64.88	77.05
W	Handwheel	mm	200	250	250	300	400	450	500	640	640						
		in	7.87	9.84	9.84	11.81	15.75	17.72	19.69	25.2	25.2						
	Gearbox	mm							460	460	610	610	710	710	710	710	800
		in							18.11	18.11	24.02	24.02	27.95	27.95	27.95	27.95	31.5
Weight	RF/RTJ	kg	36	52	64	118	206	230	430	652	913	1230	1562	2150	2950	4160	
		lb	79.2	114.4	140.8	259.6	453.2	506	946	1434.4	2008.6	2706	3436.4	4730	6490	9152	


BOLTED BONNET HEAVY WALL API-600 WEDGE GATE DATA



GATE VALVE API-600

FIG NO. 90F FLANGED
FIG NO. 90W BUTT WELD
FIG NO. 90R RTJ

BOLTED BONNET WEDGE GATE CL900

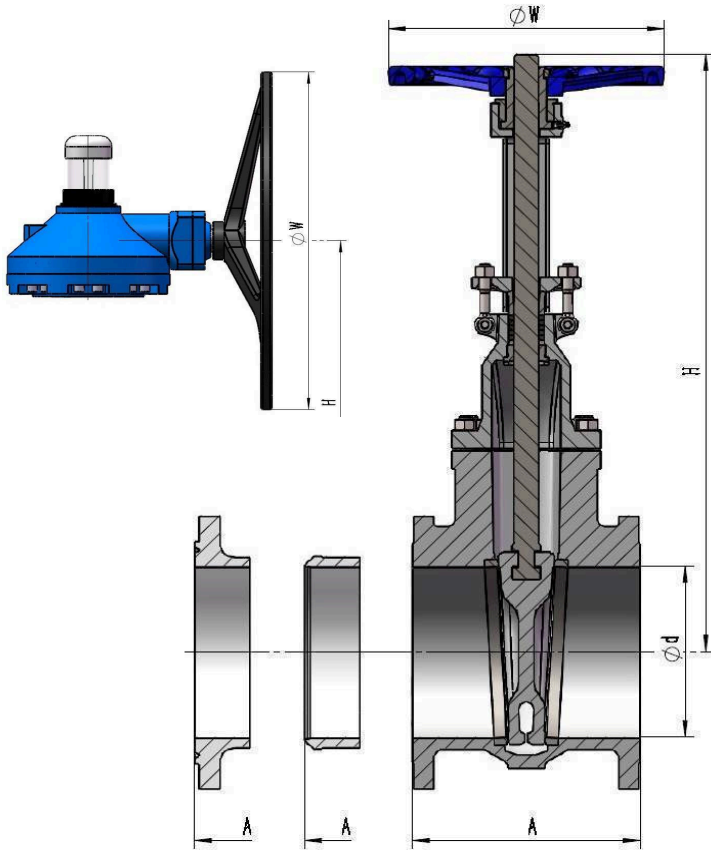

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-624 Certified, API-622 Packing

CONSTRUCTION: OS&Y rising stem
Flexible split wedge
Renewable seat ring
Bolted Bonnet
10" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Other trims available upon request


OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc

ASME CLASS 900																	
DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)															
			2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24	
A	RF	mm	368	419	381	457	559	610	737	838	965	1029	1130	1219	1321	1549	
		in	14.49	16.5	15	17.99	22.01	24.02	29.02	32.99	37.99	40.51	44.49	47.99	52.01	60.98	
	RTJ	mm	371	422	384	460	562	613	740	841	968	1039	1140	1232	1334	1568	
		in	14.61	16.61	15.12	18.11	22.13	24.13	29.13	33.11	38.11	40.91	44.88	48.5	52.52	61.73	
	BW	mm	368	419	381	457	559	610	737	838	965	1029	1130	1219	1321	1549	
		in	14.49	16.5	15	17.99	22.01	24.02	29.02	32.99	37.99	40.51	44.49	47.99	52.01	60.98	
d		mm	48	57	73	99	121	146	191	238	282	312	356	401	445	534	
		in	1.89	2.24	2.87	3.9	4.76	5.75	7.52	9.37	11.1	12.28	14.02	15.79	17.52	21.02	
	Open	mm	496	610	608	686.5	810.5	928	1104								
		in	19.53	24.02	23.94	27.03	31.91	36.54	43.46								
	Closed	mm	430	529	520	573	668	765	890								
		in	16.93	20.83	20.47	22.56	26.3	30.12	35.04								
	Gearbox	mm						771	894	1032	1169	1284	1386	1473	2417	2750	
		in						30.35	35.2	40.63	46.02	50.55	54.57	57.99	95.16	108.27	
	W	Handwheel	mm	250	300	350	350	500	500	640							
			in	9.84	11.81	13.78	13.78	19.69	19.69	25.2							
Gearbox		mm						460	610	610	710	710	800	800	1000	1000	
		in						18.11	24.02	24.02	27.95	27.95	31.5	31.5	39.37	39.37	
Weight	RF/RTJ	kg	79	116	98	155	245	355	620	1005	1360	2254	2850	3870	4860	6100	
		lb	173.8	255.2	215.6	341	539	781	1364	2211	2992	4958.8	6270	8514	10692	13420	

GATE VALVE API-600

FIG NO. 150F FLANGED
FIG NO. 150W BUTT WELD
FIG NO. 150R RTJ

BOLTED BONNET WEDGE GATE CL1500

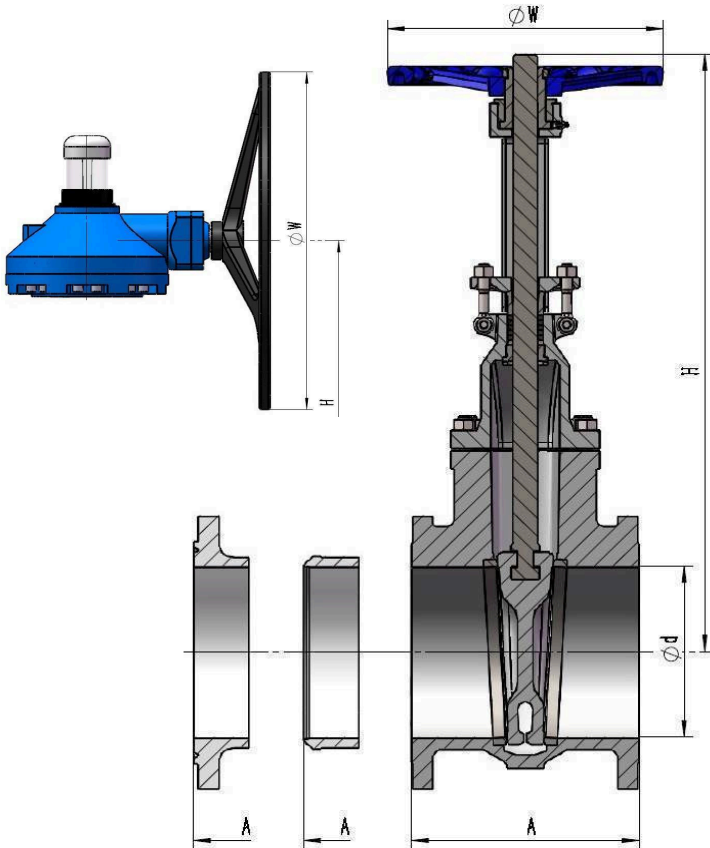

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-624 Certified, API-622 Packing

CONSTRUCTION: OS&Y rising stem
Flexible split wedge
Renewable seat ring
Bolted Bonnet
10" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Other trims available upon request

OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc

ASME CLASS 1500															
DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)													
			2	2 1/2	3	4	6	8	10	12	14	16	18	20	24
A	RF	mm	368	419	470	546	705	832	991	1130	1257	1384	1537	1664	1943
		in	14.49	16.5	18.5	21.5	27.76	32.76	39.02	44.49	49.49	54.49	60.51	65.51	76.5
	RTJ	mm	371	422	473	549	711	842	1001	1146	1276	1406	1559	1686	1971
		in	14.61	16.61	18.62	21.61	27.99	33.15	39.41	45.12	50.24	55.35	61.38	66.38	77.6
	BW	mm	368	419	470	546	705	832	991	1130	1257	1384	1537	1664	1943
		in	14.49	16.5	18.5	21.5	27.76	32.76	39.02	44.49	49.49	54.49	60.51	65.51	76.5
d		mm	48	57	70	92	136	178	222	263	289	331	372	416	499
		in	1.89	2.24	2.76	3.62	5.35	7.01	8.74	10.35	11.38	13.03	14.65	16.38	19.65
H	Open	mm	496	610	625	711	983	1121							
		in	19.53	24.02	24.61	27.99	38.7	44.13							
	Closed	mm	430	529	539	600	827	988							
		in	16.93	20.83	21.22	23.62	32.56	38.9							
	Gearbox	mm				621	822	919	1075	1165	1798	1963	2812	3078	3570
		in				24.45	32.36	36.18	42.32	45.87	70.79	77.28	110.71	121.18	140.55
W	Handwheel	mm	250	300	350	400	560	720							
		in	9.84	11.81	13.78	15.75	22.05	28.35							
	Gearbox	mm				310	610	610	710	710	800	800	1000	1000	1000
		in				12.2	24.02	24.02	27.95	27.95	31.5	31.5	39.37	39.37	39.37
Weight	RF/RTJ	kg	79	116	165	248	616	960	1910	2685	4100	6200	8100	11130	13300
		lb	173.8	255.2	363	545.6	1355.2	2112	4202	5907	9020	13640	17820	24486	29260


BOLTED BONNET HEAVY WALL API-600 WEDGE GATE DATA



GATE VALVE API-600

FIG NO. 250F FLANGED
FIG NO. 250W BUTT WELD
FIG NO. 250R RTJ

BOLTED BONNET WEDGE GATE CL2500

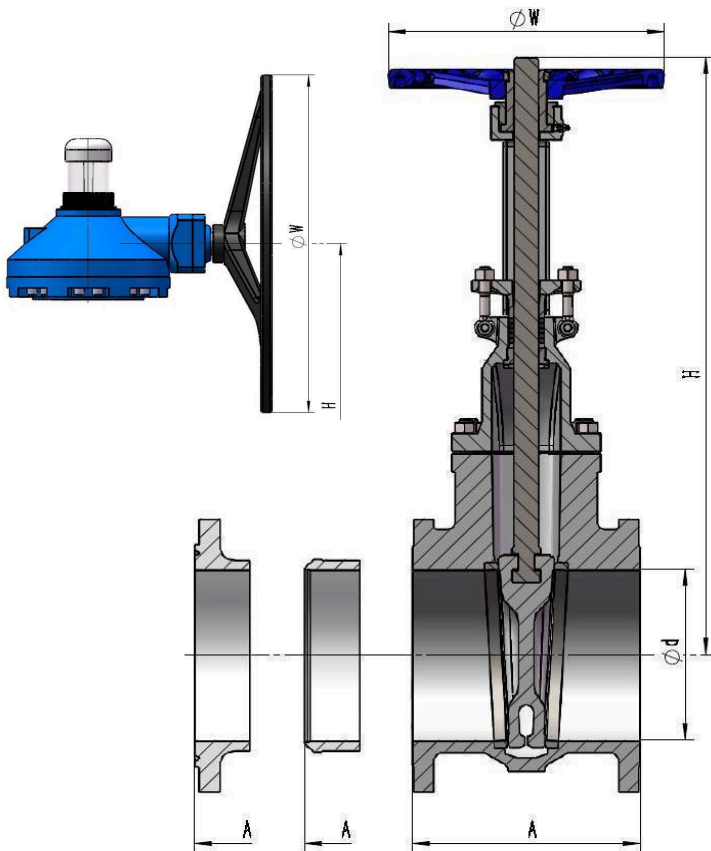

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-624 Certified, API-622 Packing

CONSTRUCTION: OS&Y rising stem
Flexible split wedge
Renewable seat ring
Bolted Bonnet
10" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Other trims available upon request


OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc

ASME CLASS 2500										
DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)								
			2	2 1/2	3	4	6	8	10	12
A	RF	mm	451	508	578	673	914	1022	1270	1422
		in	17.76	20	22.76	26.5	35.98	40.24	50	55.98
	RTJ	mm	454	514	584	683	927	1038	1292	1444
		in	17.87	20.24	22.99	26.89	36.5	40.87	50.87	56.85
	BW	mm	451	508	578	673	914	1022	1270	1422
		in	17.76	20	22.76	26.5	35.98	40.24	50	55.98
d		mm	39	48	57	73	111	147	185	219
		in	1.54	1.89	2.24	2.87	4.37	5.79	7.28	8.62
H	Open	mm	525.5	623.5	738.5	735	997	1615		
		in	20.69	24.55	29.07	28.94	39.25	63.58		
	Closed	mm	468	563	610	643	870	1450		
		in	18.43	22.17	24.02	25.31	34.25	57.09		
	Gearbox	mm							1610	2076
		in							63.39	81.73
W	Handwheel	mm	400	450	450	560	560	610		
		in	15.75	17.72	17.72	22.05	22.05	24.02		
	Gearbox	mm							610	610
		in							24.02	24.02
Weight	RF/RTJ	kg	130	200	245	490	1600	2450	4570	6100
		lb	286	440	539	1078	3520	5390	10054	13420

GATE VALVE API-600

FIG NO. N15F FLANGED
FIG NO. N15W BUTT WELD

BOLTED BONNET NRS WEDGE GATE CL150

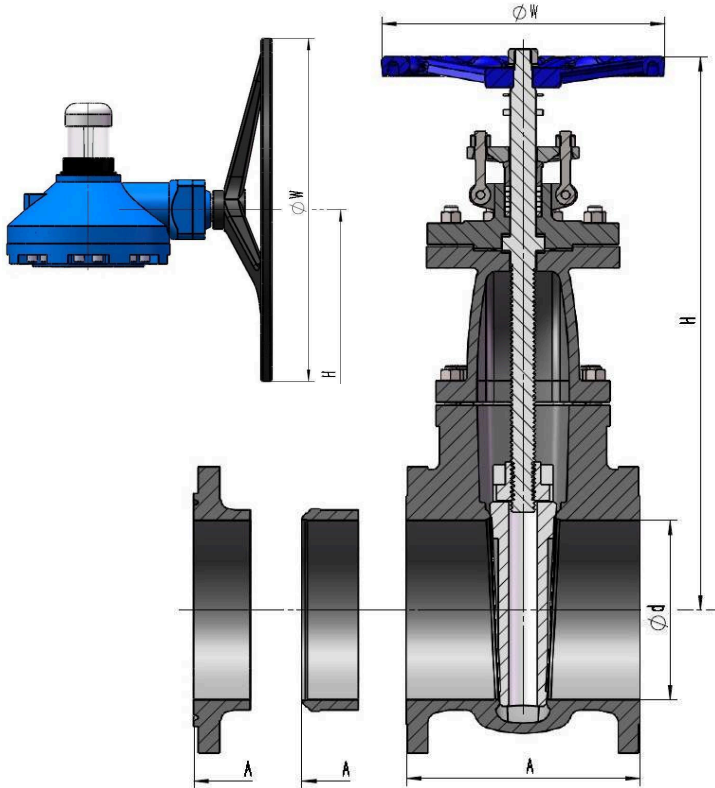

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-622 Packing

CONSTRUCTION: Non-Rising Stem (NRS)
Flexible split wedge
Renewable seat ring
Bolted Bonnet
14" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing
Calibrated position indicator

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Aluminum Bronze Trim
Other trims available upon request

OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc
Adaptable for reach-rod systems


ASME CLASS 150																
DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)														
			2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24
A	RF	mm	178	190	203	229	254	267	292	330	356	381	406	432	457	508
		in	7.01	7.48	7.99	9.02	10	10.51	11.5	12.99	14.02	15	15.98	17.01	17.99	20
	RTJ	mm	191	203	216	242	267	280	305	343	369	394	419	445	470	521
		in	7.52	7.99	8.5	9.53	10.51	11.02	12.01	13.5	14.53	15.51	16.5	17.52	18.5	20.51
	BW	mm	216	241	282	305	381	403	419	457	502	572	610	660	711	813
		in	8.5	9.49	11.1	12.01	15	15.87	16.5	17.99	19.76	22.52	24.02	25.98	27.99	32.01
d		mm	51	64	76	102	127	152	203	254	305	337	387	438	489	591
		in	2.01	2.52	2.99	4.02	5	5.98	7.99	10	12.01	13.27	15.24	17.24	19.25	23.27
H	Handwheel	mm	352	380	410	472	545	612	740	793	907	968	1313	1441	1612	1867
		in	13.86	14.96	16.14	18.58	21.46	24.09	29.13	31.22	35.71	38.11	51.69	56.73	63.46	73.5
	Gearbox	mm						612	749.5	915.5	1024.5	1158	1127	1404	1598	1894.5
		in						24.09	29.51	36.04	40.33	45.59	44.37	55.28	62.91	74.59
W	Handwheel	mm	200	200	250	250	300	300	350	400	450	500	560	640	640	720
		in	7.87	7.87	9.84	9.84	11.81	11.81	13.78	15.75	17.72	19.69	22.05	25.2	25.2	28.35
	Gearbox	mm						310	310	310	460	460	610	610	710	710
		in						12.2	12.2	12.2	18.11	18.11	24.02	24.02	27.95	27.95
Weight	RF/RTJ	kg	20	26	34	68	88	105	116	262	325	420	580	630	800	1108
		lb	44	57.2	74.8	149.6	193.6	231	255.2	576.4	715	924	1276	1386	1760	2437.6



GATE VALVE API-600

FIG NO. N30F FLANGED
FIG NO. N30W BUTT WELD

BOLTED BONNET NRS WEDGE GATE CL300

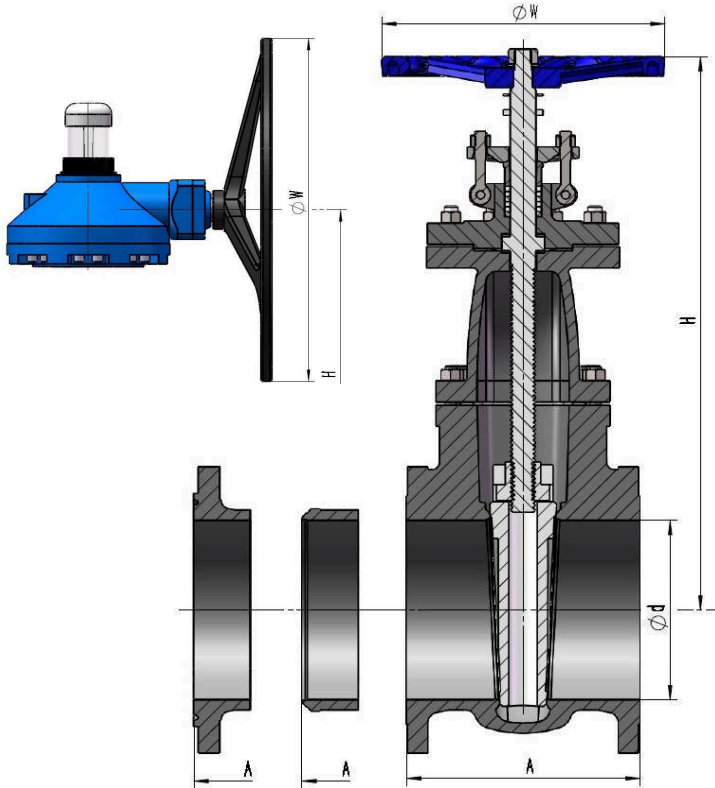

DESIGN: API-600, ASME B16.34

TEST: API-598

SPECIFICATIONS: ASME B16.5, B16.25, B16.10, MSS SP-45

FUGITIVE EMISSION: API-622 Packing

CONSTRUCTION: Non-Rising Stem (NRS)
Flexible split wedge
Renewable seat ring
Bolted Bonnet
14" and above two-piece yoke
Handwheel, Gear op, or bare stem for actuation
Bidirectional sealing
Calibrated position indicator

ASTM BODY MATERIALS: WCB, WCC, WC6, WC9, C5, C12, LCB, LCC, CF8, CF8M, CF3, CF3M, Bronze, CK3MCUN, Duplex, Super Duplex

TRIMS: Standard API trim Nos. 5, 8, 9, 11, 12, 16.
Aluminum Bronze Trim
Other trims available upon request

OPTIONS: Extended bonnets
Cryogenic service
Bonnet vent and bypasses
Double split disc
Adaptable for reach-rod systems

ASME CLASS 300																
DIMENSIONS AND WEIGHTS		VALVE SIZE (IN)														
			2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24
A	RF	mm	216	241	282	305	381	403	419	457	502	762	838	914	991	1143
		in	8.5	9.49	11.1	12.01	15	15.87	16.5	17.99	19.76	30	32.99	35.98	39.02	45
	RTJ	mm	232	257	298	321	397	419	435	473	518	778	854	930	1010	1165
		in	9.13	10.12	11.73	12.64	15.63	16.5	17.13	18.62	20.39	30.63	33.62	36.61	39.76	45.87
	BW	mm	216	241	282	305	381	403	419	457	502	762	838	914	991	1143
		in	8.5	9.49	11.1	12.01	15	15.87	16.5	17.99	19.76	30	32.99	35.98	39.02	45
d		mm	51	64	76	102	127	152	203	254	305	337	387	432	483	584
		in	2.01	2.52	2.99	4.02	5	5.98	7.99	10	12.01	13.27	15.24	17.01	19.02	22.99
H	Handwheel	mm	355	371	436	504	564	627	764	917	1080	1191	1305	1486		
		in	13.98	14.61	17.17	19.84	22.2	24.69	30.08	36.1	42.52	46.89	51.38	58.5		
	Gearbox	mm						640	797	928	1082	1180	1320	1485	1620	1900
		in						25.2	31.38	36.54	42.6	46.46	51.97	58.46	63.78	74.8
W	Handwheel	mm	200	200	250	250	300	350	400	450	500	560	640	640		
		in	7.87	7.87	9.84	9.84	11.81	13.78	15.75	17.72	19.69	22.05	25.2	25.2		
	Gearbox	mm						310	310	460	460	460	610	610	610	710
		in						12.2	12.2	18.11	18.11	18.11	24.02	24.02	24.02	27.95
Weight	RF/RTJ	kg	26	35	52	74	102	125	210	350	459	683	950	1205	1480	2660
		lb	57.2	77	114.4	162.8	224.4	275	462	770	1009.8	1502.6	2090	2651	3256	5852