

SLAB GATE VALVES, CLASS 150

(HANDWHEEL OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 24" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
1912	Handwheel	RF
1913	Handwheel	RTJ
1914	Handwheel	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr. 70 + ENP or ASTM A105N+ ENP
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + ENP
17	Drain Plug	Cs + Zn
18	Seat insert	RPTFE or Nylon
19	Yoke	ASTM A216 Gr. WCB
20	Vent	Cs + Zn
21	Spring	Inconel X-750

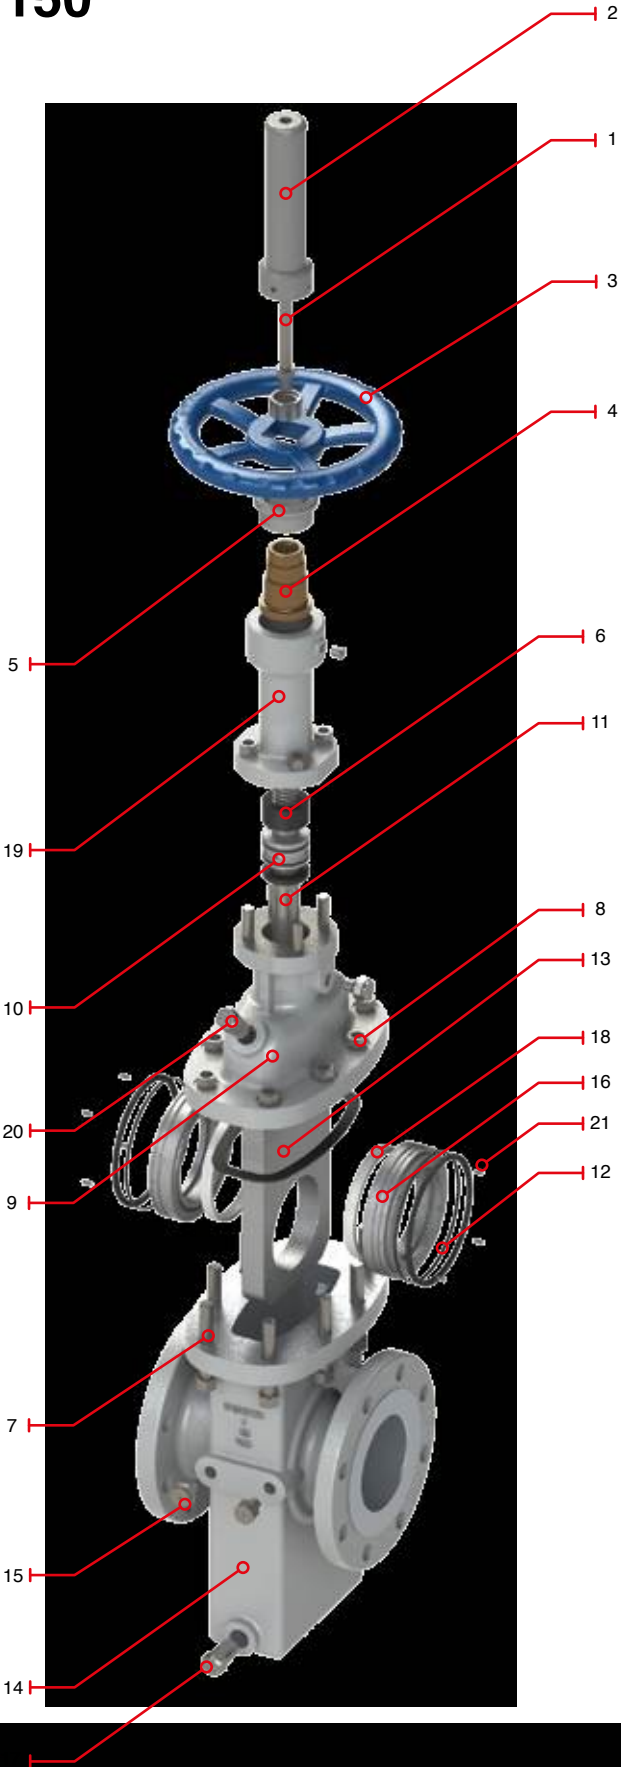

SLAB GATE VALVES, CLASS 150



(HANDWHEEL OPERATED)



DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26” and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2” to 24” Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
1912	Handwheel	RF
1913	Handwheel	RTJ
1914	Handwheel	WE

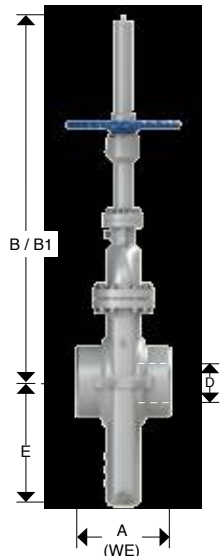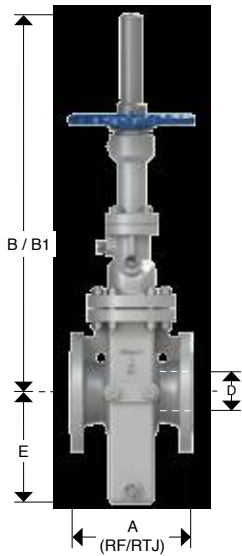

Dimensions

NOM SIZE	in	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
OPERATION		HW	HW	HW	HW	HW	HW	HW	HW	HW	HW	HW	HW
D	in	1.93	2.91	3.94	5.91	7.91	9.92	11.93	13.15	15.16	17.17	19.17	23.19
	mm	49	74	100	150	201	252	303	334	385	436	487	589
A / RF	in	7.01	7.99	9.02	10.51	11.50	12.99	14.02	15.00	15.98	17.01	17.99	20.00
	mm	178	203	229	267	292	330	356	381	406	432	457	508
A / RTJ	in	7.52	8.50	9.49	10.98	12.01	13.50	14.49	15.51	16.50	17.52	18.50	20.51
	mm	191	216	241	279	305	343	368	394	419	445	470	521
A / WE	in	8.50	11.14	12.01	15.87	16.50	17.99	19.76	22.52	24.02	25.98	27.99	32.01
	mm	216	283	305	403	419	457	502	572	610	660	711	813
B	in	22.44	24.21	29.25	37.48	44.72	55.94	63.58	67.28	75.79	84.25	96.85	110.24
	mm	570	615	743	952	1136	1421	1615	1709	1925	2140	2460	2800
B1	in	25.28	27.87	34.09	44.33	53.78	66.93	76.77	81.57	92.20	102.83	117.72	135.24
	mm	642	708	866	1126	1366	1700	1950	2072	2342	2612	2990	3435
E	in	5.35	7.09	8.39	11.97	15.35	18.50	21.46	23.39	27.17	29.76	35.43	42.91
	mm	136	180	213	304	390	470	545	594	690	756	900	1090
Weight RF	lbs	77.14	110.20	165.30	297.54	462.84	661.20	958.74	1168.12	1498.72	2005.64	2931.32	4452.08
	kg	35	50	75	135	210	300	435	530	680	910	1330	2020
Weight WE	lbs	67.11	95.87	143.81	258.86	402.67	575.24	834.10	1016.26	1303.89	1744.91	2550.25	3873.31
	kg	30.45	43.5	65.25	117.45	182.7	261	378.45	461.1	591.6	791.7	1157.1	1757.4

SLAB GATE VALVES, CLASS 150

(GEAR OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 26" to 48" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
1922	Gear Operator	RF
1923	Gear Operator	RTJ
1924	Gear Operator	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Gear operator	Commercial Steel
4	Stem Nut	ASTM A439 D2
5	Stop	ASTM A 108 Gr. 1020
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr.70+ TCC or ASTM A105N+ TCC
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + TCC
17	Drain Plug	Cs + Zn
18	Yoke	ASTM A216 Gr. WCB
19	Gland Flange	CS
20	Vent	Cs + Zn
*21	Springs	Inconel X-750
22	Seat Insert	RPTFE or Nylon

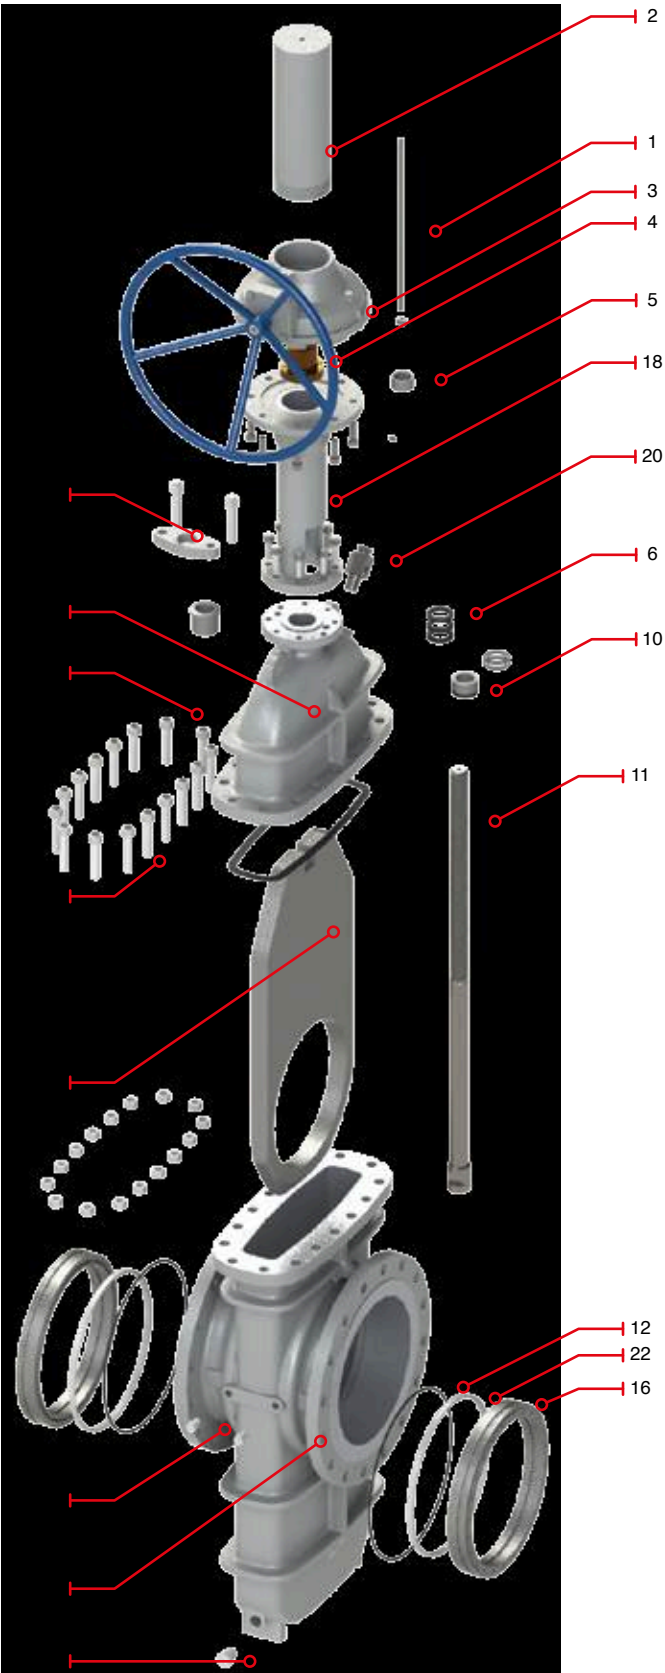


SLAB GATE VALVES, CLASS 150

(GEAR OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 26" to 48" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
1922	Gear Operator	RF
1923	Gear Operator	RTJ
1924	Gear Operator	WE

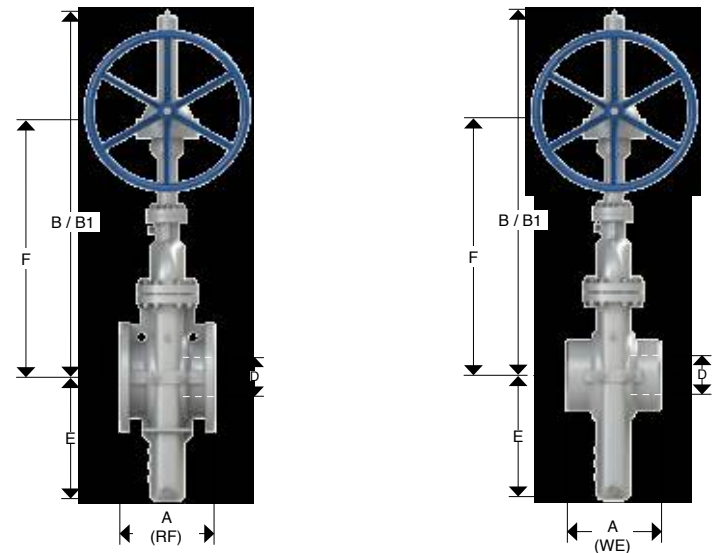

Dimensions

NOM SIZE	in	26"	28"	30"	32"	34"	36"	38"	40"	42"	48"
OPERATION		GO	GO	GO	GO	GO	GO	GO	GO	GO	GO
D	in	24.92	26.93	28.94	30.67	32.68	34.41	36.42	38.43	40.16	45.91
	mm	633	684	735	779	830	874	925	976	1020	1166
A / RF	in	22.01	24.02	25.98	27.99	30.00	32.01	33.31	35.98	37.99	44.02
	mm	559	610	660	711	762	813	846	914	965	1118
A / WE	in	34.02	35.98	35.98	37.99	39.96	40.00	42.01	44.02	45.98	52.01
	mm	864	914	914	965	1015	1016	1067	1118	1168	1321
B	in	121.26	127.17	135.83	144.09	152.76	161.42	166.54	178.74	188.98	204.72
	mm	3080	3230	3450	3660	3880	4100	4230	4540	4800	5200
B1	in	148.23	156.30	166.93	176.77	187.60	198.23	205.31	219.49	231.69	253.35
	mm	3765	3970	4240	4490	4765	5035	5215	5575	5885	6435
E	in	45.87	48.62	51.57	54.33	57.48	59.84	66.93	69.88	76.77	82.68
	mm	1165	1235	1310	1380	1460	1520	1700	1775	1950	2100
F	in	88.07	91.93	98.70	105.20	111.61	118.27	121.50	131.77	138.90	148.66
	mm	2237	2335	2507	2672	2835	3004	3086	3347	3528	3776
Weight RF	lbs	5697.34	6722.20	7934.40	9256.80	10469.00	11240.40	13113.80	15428.00	19174.80	27192.95
	kg	2585	3050	3600	4200	4750	5100	5950	7000	8700	12338
Weight WE	lbs	4956.69	5848.31	6902.93	8053.42	9108.03	9779.15	11409.01	13422.36	16682.08	23657.87
	kg	2248.95	2653.5	3132	3654	4132.5	4437	5176.5	6090	7569	10734.06

SLAB GATE VALVES, CLASS 300

(HANDWHEEL OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 24" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
3912	Handwheel	RF
3913	Handwheel	RTJ
3914	Handwheel	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr. 70 + ENP or ASTM A105N+ ENP
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + ENP
17	Drain Plug	Cs + Zn
18	Seat insert	RPTFE or Nylon
19	Yoke	ASTM A216 Gr. WCB
20	Vent	Cs + Zn
21	Spring	Inconel X-750

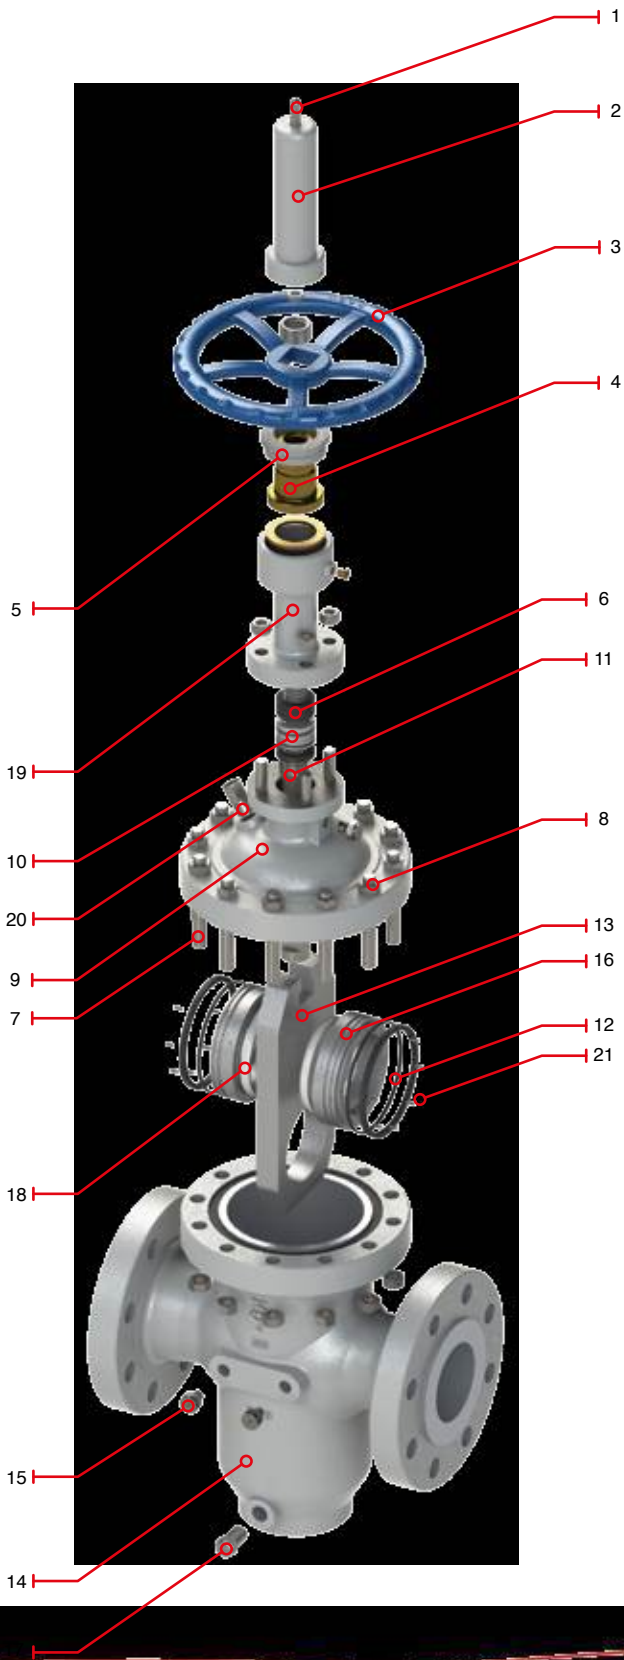


SLAB GATE VALVES, CLASS 300

(HANDWHEEL OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 24" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
3912	Handwheel	RF
3913	Handwheel	RTJ
3914	Handwheel	WE

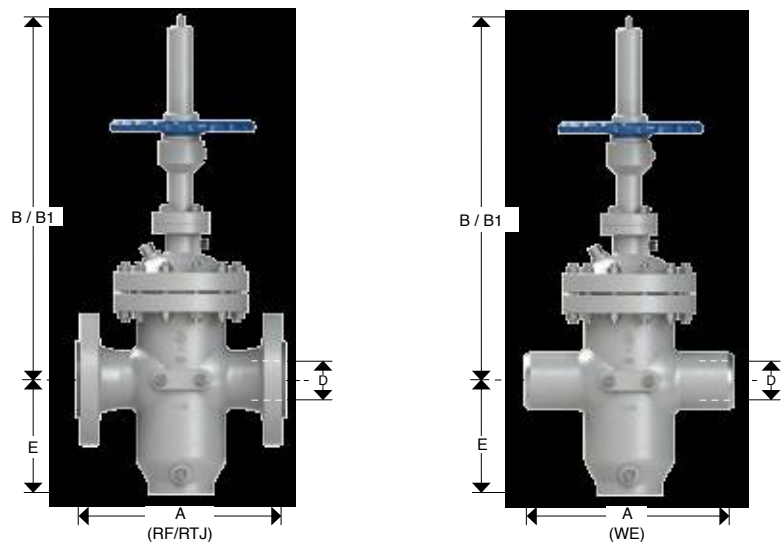

Dimensions

NOM SIZE	in	2"	3"	4"	6"	8"	10"	12"	14"	16"	18"
OPERATION		HW	HW	HW	HW	HW	HW	HW	HW	HW	HW
D	in	1.93	2.91	3.94	5.91	7.91	9.92	11.93	13.15	15.16	17.17
	mm	49	74	100	150	201	252	303	334	385	436
A / RF	in	8.50	11.14	12.01	15.87	16.50	17.99	19.76	30.00	32.99	35.98
	mm	216	283	305	403	419	457	502	762	838	914
A / RTJ	in	9.13	11.73	12.64	16.50	17.13	18.62	14.49	30.63	33.62	36.61
	mm	232	298	321	419	435	473	368	778	854	930
A / WE	in	8.50	11.14	12.01	15.87	16.50	17.99	19.76	30.00	32.99	35.98
	mm	216	283	305	403	419	457	502	762	838	914
B	in	22.44	24.21	29.25	37.48	44.72	55.94	63.58	67.28	75.79	84.25
	mm	570	615	743	952	1136	1421	1615	1709	1925	2140
B1	in	25.28	27.87	34.09	44.33	53.78	66.93	76.77	81.57	92.20	102.83
	mm	642	708	866	1126	1366	1700	1950	2072	2342	2612
E	in	5.35	7.09	8.39	11.97	15.35	18.50	21.46	23.39	27.17	29.76
	mm	136	180	213	304	390	470	545	594	690	756
Weight RF	lbs	99.18	165.30	198.36	473.86	727.32	1102.00	1542.80	2402.36	3526.40	4419.02
	kg	45	75	90	215	330	500	700	1090	1600	2005
Weight WE	lbs	86.29	143.81	172.57	412.26	632.77	958.74	1342.24	2090.05	3067.97	3844.55
	kg	39.15	65.25	78.3	187.05	287.1	435	609	948.3	1392	1744.35

SLAB GATE VALVES, CLASS 300

(GEAR OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 26" to 48" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
3922	Gear Operator	RF
3923	Gear Operator	RTJ
3924	Gear Operator	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr.70+ TCC or ASTM A105N+ TCC
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + TCC
17	Drain Plug	Cs + Zn
18	Yoke	ASTM A216 Gr. WCB
19	Gland Flange	CS
20	Vent	Cs + Zn
21	Springs	Inconel X-750
22	Seat Insert	RPTFE or Nylon

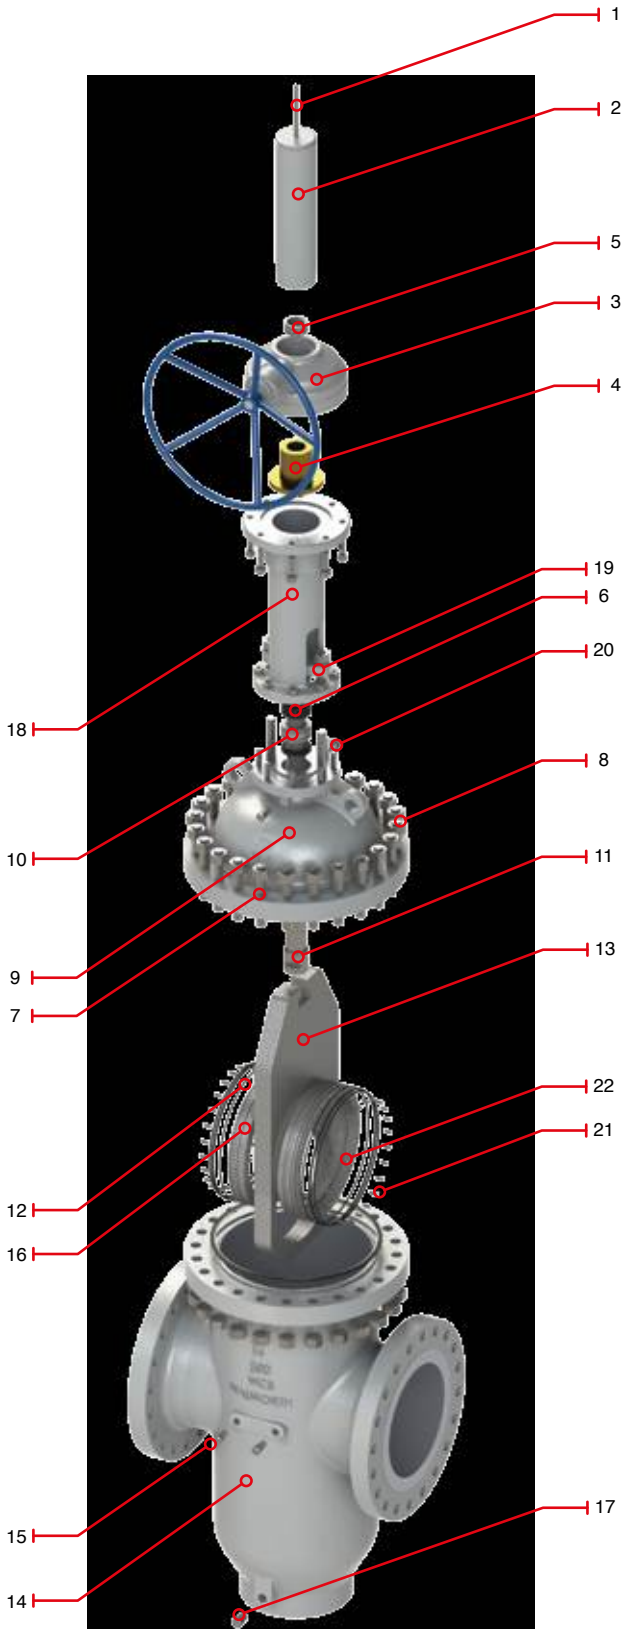


SLAB GATE VALVES, CLASS 300

(GEAR OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 26" to 48" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
3922	Gear Operator	RF
3923	Gear Operator	RTJ
3924	Gear Operator	WE

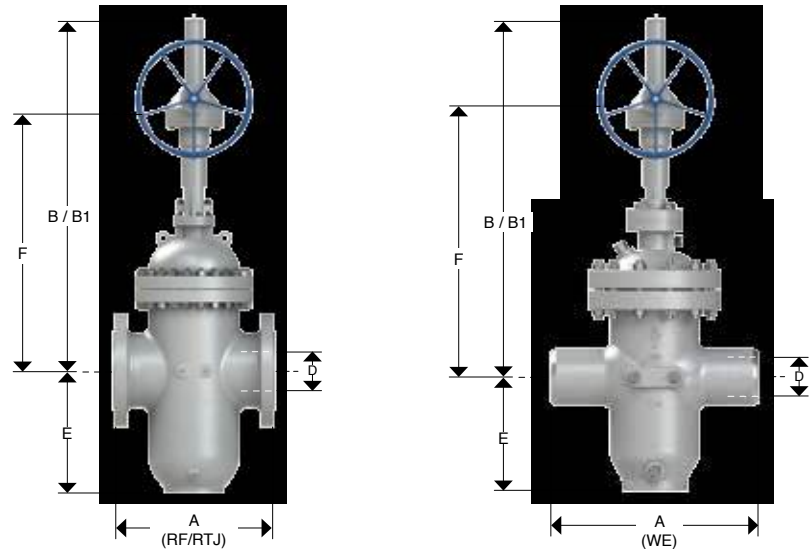

Dimensions

NOM SIZE	in	20"	24"	26"	28"	30"	32"	34"	36"	38"	40"	42"	48"
OPERATION		GO	GO	GO	GO	GO	GO	GO	GO	GO	GO	GO	GO
D	in	19.17	23.19	24.92	26.93	28.94	30.67	32.68	34.41	36.42	38.43	40.16	45.91
	mm	487	589	633	684	735	779	830	874	925	976	1020	1166
A / RF	in	39.02	44.65	49.02	52.99	55.00	60.00	64.02	67.99	72.01	76.61	80.00	92.01
	mm	991	1134	1245	1346	1397	1524	1626	1727	1829	1946	2032	2337
A / RTJ	in	39.76	45.87	50.00	54.02	55.98	61.14	65.12	69.13	-	-	-	-
	mm	1010	1165	1270	1372	1422	1553	1654	1756	-	-	-	-
A / WE	in	39.02	45.00	49.02	52.99	55.00	60.00	64.02	67.99	72.01	76.61	80.00	92.01
	mm	991	1143	1245	1346	1397	1524	1626	1727	1829	1946	2032	2337
B	in	96.85	110.24	121.26	127.17	135.83	144.09	152.76	161.42	166.54	178.74	188.98	204.72
	mm	2460	2800	3080	3230	3450	3660	3880	4100	4230	4540	4800	5200
B1	in	117.72	135.24	148.23	156.30	166.93	176.77	187.60	198.23	205.31	219.49	231.69	253.35
	mm	2990	3435	3765	3970	4240	4490	4765	5035	5215	5575	5885	6435
E	in	35.43	42.91	45.87	48.62	51.57	54.33	57.48	59.84	66.93	69.88	76.77	82.68
	mm	900	1090	1165	1235	1310	1380	1460	1520	1700	1775	1950	2100
F	in	POA	POA	88.07	91.93	98.70	105.20	111.61	118.27	121.50	131.77	138.90	148.66
	mm	POA	POA	2237	2335	2507	2672	2835	3004	3086	3347	3528	3776
Weight RF	lbs	4738.60	7339.32	10482.22	13224.00	15207.60	16640.20	19615.60	23142.00	28101.00	34162.00	40961.34	55536.39
	kg	2150	3330	4756	6000	6900	7550	8900	10500	12750	15500	18585	25198
Weight WE	lbs	4122.58	6385.21	9119.53	11504.88	13230.61	14476.97	17065.57	20133.54	24447.87	29720.94	35636.37	48316.66
	kg	1870.5	2897.1	4137.72	5220	6003	6568.5	7743	9135	11092.5	13485	16168.95	21922.26

SLAB GATE VALVES, CLASS 600

(HANDWHEEL OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 24" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
6912	Handwheel	RF
6913	Handwheel	RTJ
6914	Handwheel	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr. 70 + ENP or ASTM A105N+ ENP
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + ENP
17	Drain Plug	Cs + Zn
18	Seat insert	RPTFE or Nylon
19	Yoke	ASTM A216 Gr. WCB
20	Vent	Cs + Zn
21	Spring	Inconel X-750

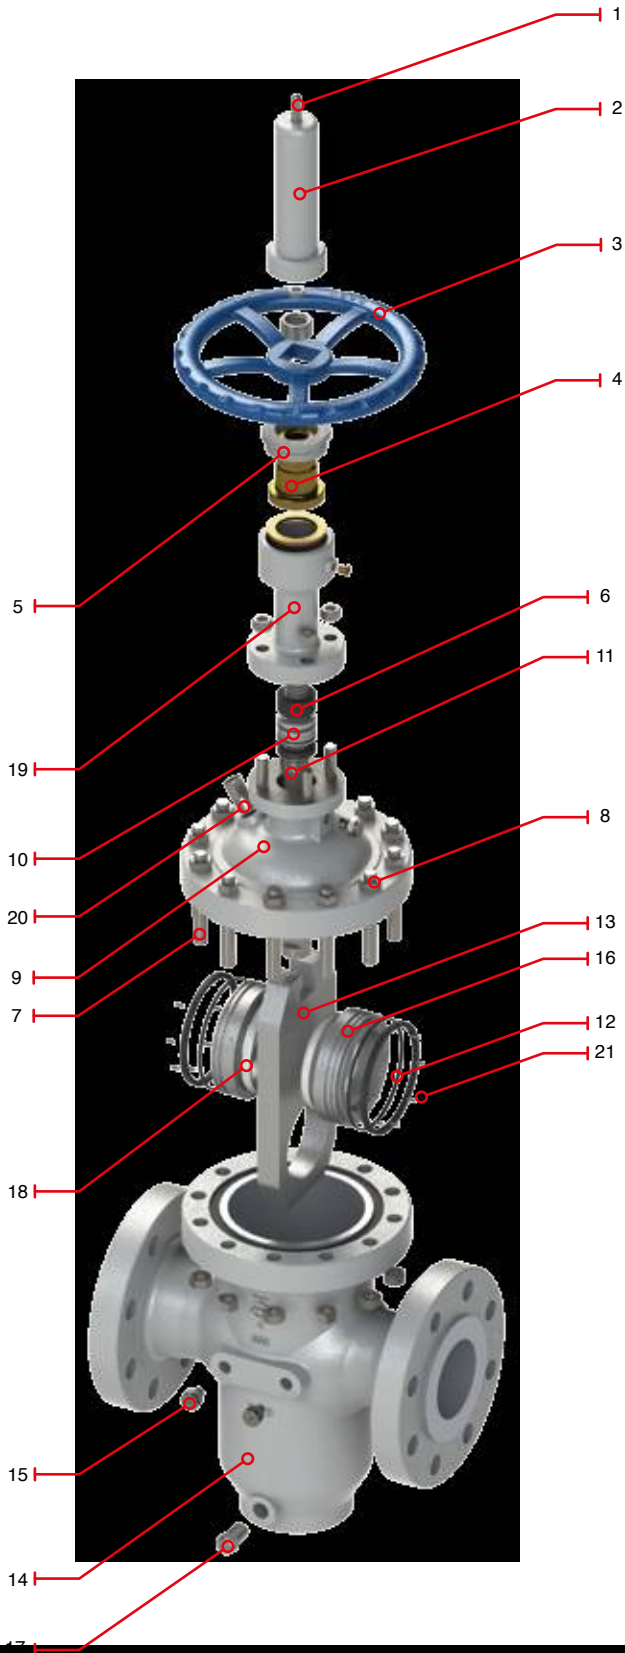



SLAB GATE VALVES, CLASS 600

(HANDWHEEL OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 24" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
6912	Handwheel	RF
6913	Handwheel	RTJ
6914	Handwheel	WE

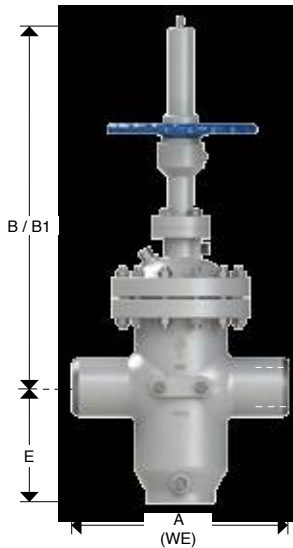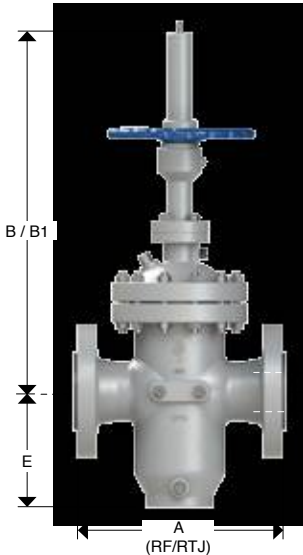

Dimensions

NOM SIZE	in	2"	3"	4"	6"	8"	10"	12"	14"
OPERATION		HW	HW	HW	HW	HW	HW	HW	HW
D	in	1.93	2.91	3.94	5.91	7.91	9.92	11.93	13.15
	mm	49	74	100	150	201	252	303	334
A / RF	in	11.50	14.02	17.01	22.01	25.98	30.98	32.99	35.00
	mm	292	356	432	559	660	787	838	889
A / RTJ	in	11.61	14.13	17.13	22.13	26.14	31.14	33.11	35.12
	mm	295	359	435	562	664	791	841	892
A / WE	in	11.50	14.02	17.01	22.01	25.98	30.98	32.99	35.00
	mm	292	356	432	559	660	787	838	889
B	in	20.67	25.47	30.24	40.08	47.44	59.06	69.96	73.62
	mm	525	647	768	1018	1205	1500	1777	1870
B1	in	23.46	29.41	35.08	46.97	56.38	70.47	83.54	88.19
	mm	596	747	891	1193	1432	1790	2122	2240
E	in	5.83	7.76	9.29	12.80	16.34	19.69	23.82	25.87
	mm	148	197	236	325	415	500	605	657
* F	in	-	-	-	-	-	-	53.39	55.98
	mm	-	-	-	-	-	-	1356	1422
Weight RF	lbs	121.22	187.34	330.60	639.16	991.80	1542.80	2314.20	2975.40
	kg	55	85	150	290	450	700	1050	1350
Weight WE	lbs	105.46	162.99	287.62	556.07	862.87	1342.24	2013.35	2588.60
	kg	47.85	73.95	130.5	252.3	391.5	609	913.5	1174.5

SLAB GATE VALVES, CLASS 600

(GEAR OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 26" to 48" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
6922	Gear Operator	RF
6923	Gear Operator	RTJ
6924	Gear Operator	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr.70+ TCC or ASTM A105N+ TCC
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + TCC
17	Drain Plug	Cs + Zn
18	Yoke	ASTM A216 Gr. WCB
19	Gland Flange	CS
20	Vent	Cs + Zn
21	Springs	Inconel X-750
22	Seat Insert	RPTFE or Nylon

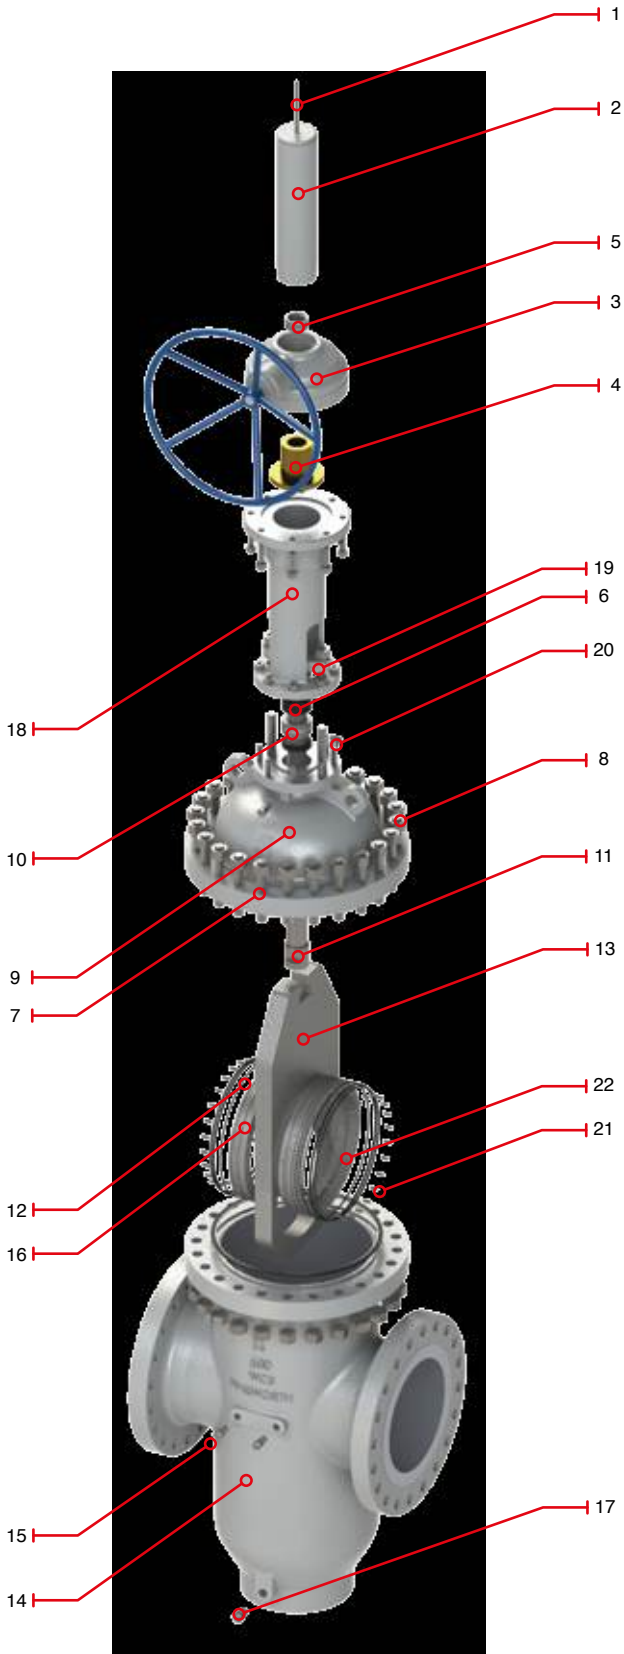


SLAB GATE VALVES, CLASS 600

(GEAR OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 26" to 48" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
6922	Gear Operator	RF
6923	Gear Operator	RTJ
6924	Gear Operator	WE

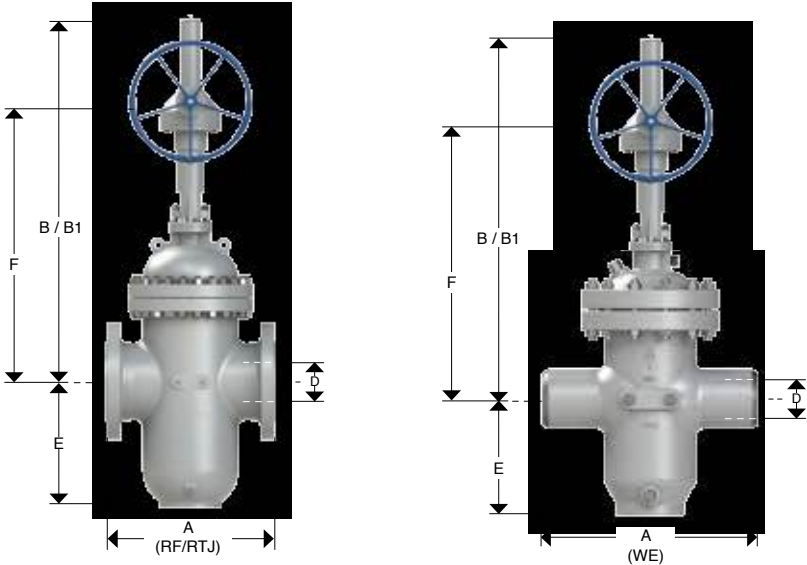

Dimensions

NOM SIZE	in	16"	18"	20"	24"	26"	28"	30"	32"	34"	36"	38"	40"	42"	48"
OPERATION		GO	GO	GO	GO	GO	GO	GO	GO	GO	GO	GO	GO	GO	GO
D	in	15.16	17.17	19.17	23.19	24.92	26.93	28.94	30.67	32.68	34.41	36.42	38.43	40.16	45.91
	mm	385	436	487	589	633	684	735	779	830	874	925	976	1020	1166
A / RF	in	39.02	42.99	47.01	55.00	57.01	60.98	65.00	70.00	75.98	82.01	85.98	90.00	95.98	110.00
	mm	991	1092	1194	1397	1448	1549	1651	1524	1626	2083	2184	2286	2438	2794
A / RTJ	in	39.13	43.11	47.24	55.39	57.52	61.50	65.51	70.63	76.61	82.64	-	-	-	-
	mm	994	1095	1200	1407	1461	1562	1664	1553	1654	2099	-	-	-	-
A / WE	in	39.02	42.99	47.01	55.00	57.01	60.98	65.00	70.00	75.98	82.01	85.98	90.00	95.98	110.00
	mm	991	1092	1194	1397	1448	1549	1651	1524	1626	2083	2184	2286	2438	2794
B	in	84.45	92.56	100.20	113.39	119.69	128.35	135.83	146.46	157.48	168.50	173.23	178.74	190.16	206.50
	mm	2145	2351	2545	2880	3040	3260	3450	3660	3880	4280	4400	4540	4830	5245
B1	in	101.57	111.50	121.26	138.58	147.24	157.87	167.32	179.72	192.83	205.71	212.44	220.16	234.49	255.35
	mm	2580	2832	3080	3520	3740	4010	4250	4490	4765	5225	5396	5592	5956	6486
E	in	29.13	32.48	36.22	42.52	48.43	51.57	51.57	57.09	60.63	63.78	66.85	69.88	77.95	84.45
	mm	740	825	920	1080	1230	1310	1310	1450	1540	1620	1698	1775	1980	2145
F	in	64.88	71.34	76.57	85.55	89.29	95.39	101.02	110.08	118.82	127.87	130.63	133.54	141.97	153.62
	mm	1648	1812	1945	2173	2268	2423	2566	2672	2835	3248	3318	3392	3606	3902
Weight RF	lbs	4584.32	5510.00	7449.52	11747.32	15868.80	18734.00	22040.00	29754.00	34382.40	39672.00	46945.20	50251.20	56202.00	77558.76
	kg	2080	2500	3380	5330	7200	8500	10000	13500	15600	18000	21300	22800	25500	35190
Weight WE	lbs	3988.36	4793.70	6481.08	10220.17	13805.86	16298.58	19174.80	25885.98	29912.69	34514.64	40842.32	43718.54	48895.74	67476.12
	kg	1809.6	2175	2940.6	4637.1	6264	7395	8700	11745	13572	15660	18531	19836	22185	30615.3

SLAB GATE VALVES, CLASS 900

(HANDWHEEL OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 6" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
9912	Handwheel	RF
9913	Handwheel	RTJ
9914	Handwheel	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr. 70 + ENP or ASTM A105N+ ENP
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + ENP
17	Drain Plug	Cs + Zn
18	Seat insert	RPTFE or Nylon
19	Yoke	ASTM A216 Gr. WCB
20	Vent	Cs + Zn
21	Spring	Inconel X-750

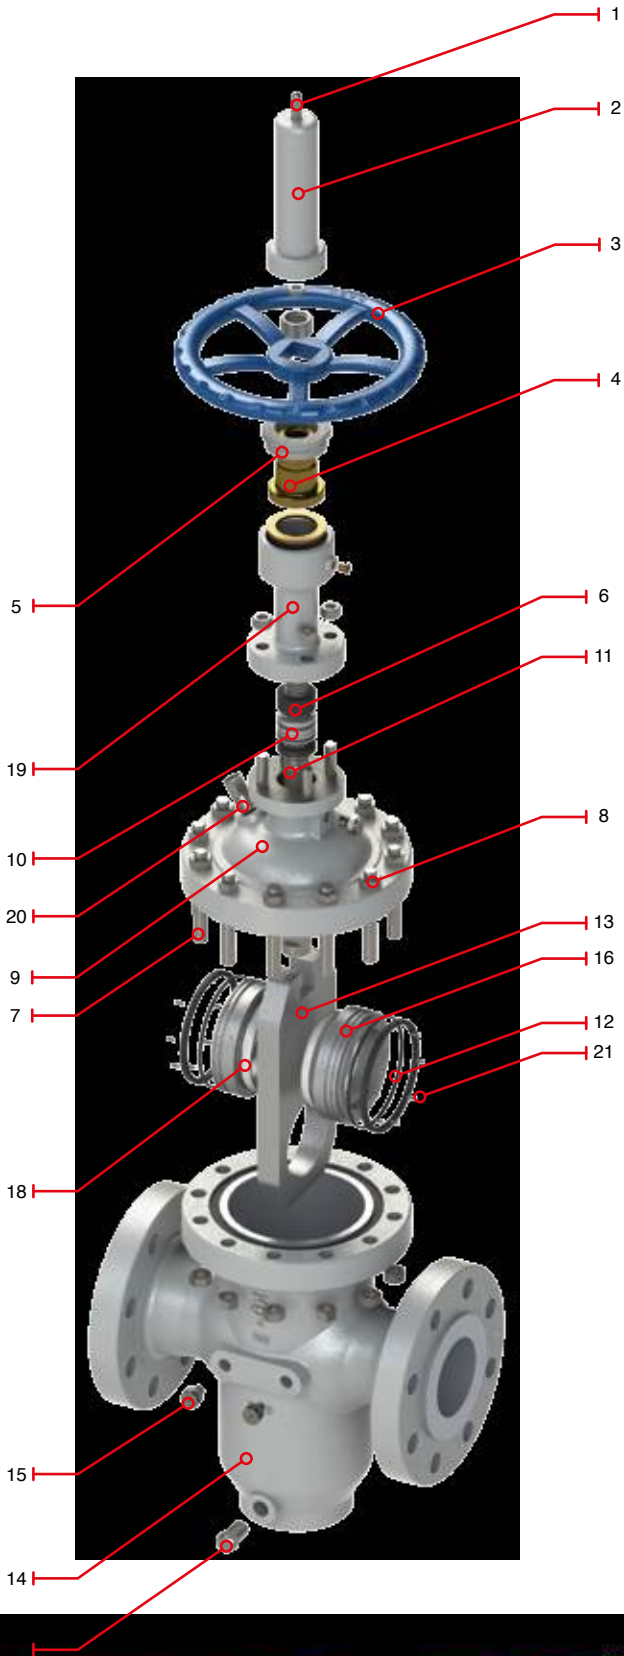


SLAB GATE VALVES, CLASS 900

(HANDWHEEL OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 6" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
9912	Handwheel	RF
9913	Handwheel	RTJ
9914	Handwheel	WE

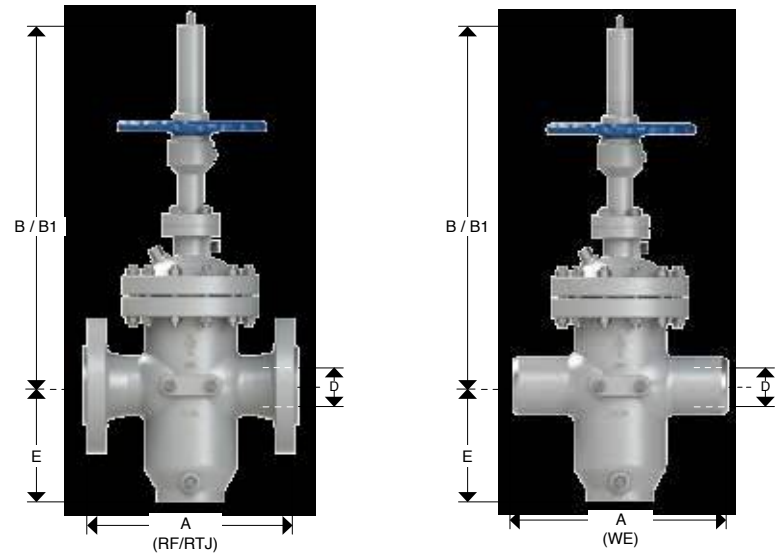

Dimensions

NOM SIZE	in	2"	3"	4"	6"
OPERATION		HW	HW	HW	HW
D	in	1.93	2.91	3.94	5.91
	mm	49	74	100	150
A / RF	in	14.49	15.00	17.99	24.02
	mm	368	381	457	610
A / RTJ	in	14.61	15.12	18.11	24.13
	mm	371	384	460	613
A / WE	in	14.49	15.00	17.99	24.02
	mm	368	381	457	610
B	in	23.07	25.47	30.71	40.94
	mm	586	647	780	1040
B1	in	25.79	29.41	35.83	48.15
	mm	655	747	910	1223
E	in	7.28	8.27	9.29	13.39
	mm	185	210	236	340
Weight RF	lbs	143.26	352.64	396.72	881.60
	kg	65	160	180	400
Weight WE	lbs	124.64	306.80	345.15	766.99
	kg	56.55	139.2	156.6	348

SLAB GATE VALVES, CLASS 900

(GEAR OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 8" to 24" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
9922	Gear Operator	RF
9923	Gear Operator	RTJ
9924	Gear Operator	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr.70+ TCC or ASTM A105N+ TCC
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + TCC
17	Drain Plug	Cs + Zn
18	Yoke	ASTM A216 Gr. WCB
19	Gland Flange	CS
20	Vent	Cs + Zn
21	Springs	Inconel X-750
22	Seat Insert	RPTFE or Nylon

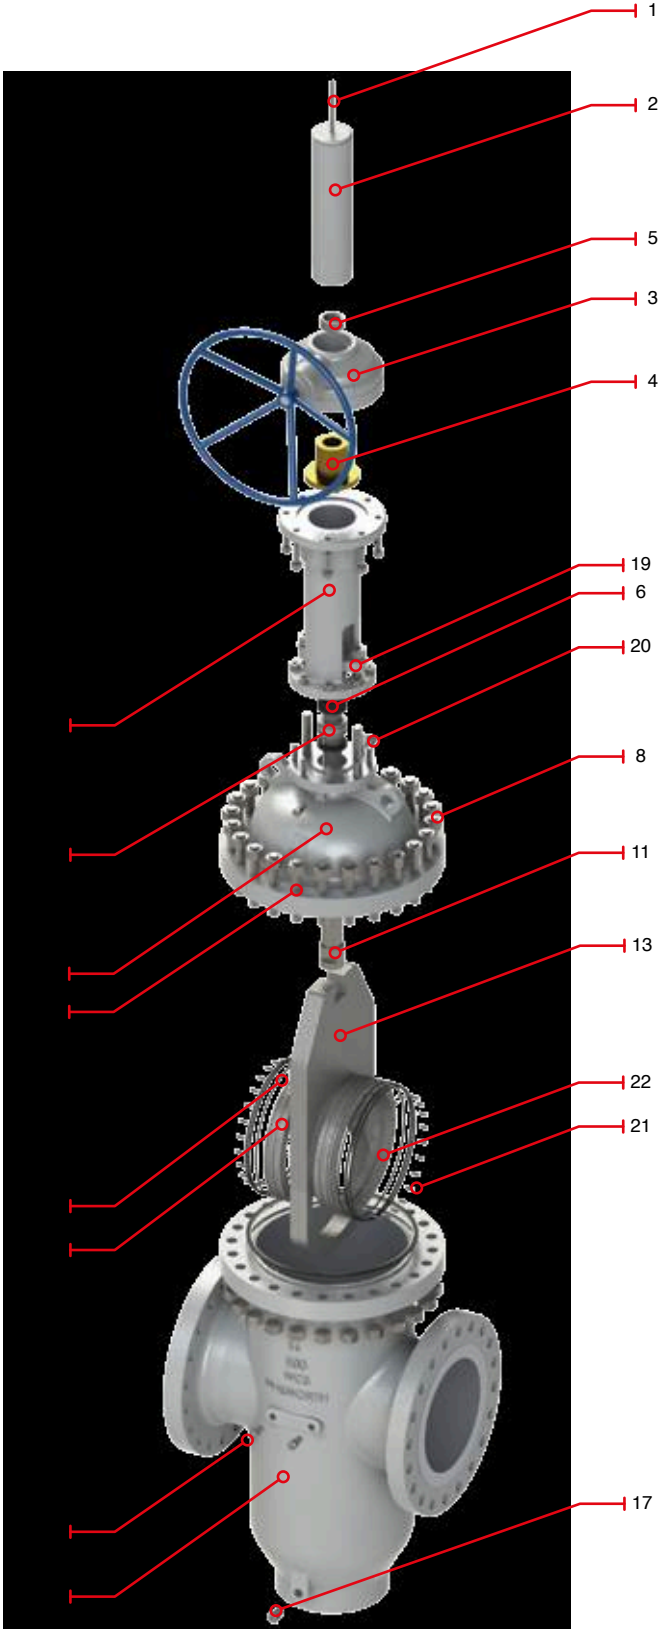


SLAB GATE VALVES, CLASS 900

(GEAR OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 8" to 24" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
9922	Gear Operator	RF
9923	Gear Operator	RTJ
9924	Gear Operator	WE

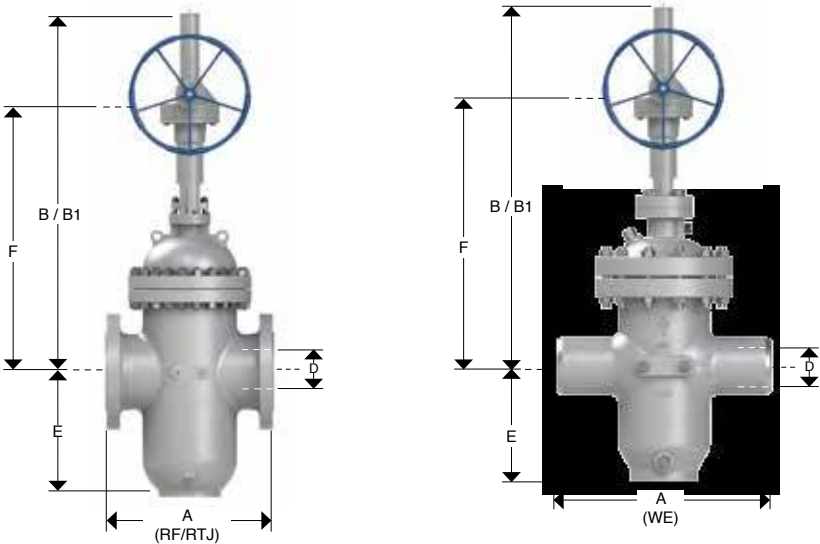

Dimensions

NOM SIZE	in	8"	10"	12"	14"	16"	18"	20"	24"
OPERATION	GO	GO	GO	GO	GO	GO	GO	GO	GO
D	mm	7.91	9.92	11.93	12.68	14.69	16.65	18.54	22.44
	in	201	252	303	322	373	423	471	570
A / RF	mm	29.02	32.99	37.99	40.51	44.49	47.99	52.01	60.98
	in	737	838	965	1029	1130	1219	1321	1549
A / RTJ	mm	29.13	33.11	38.11	40.87	44.88	48.50	52.52	61.73
	in	740	841	968	1038	1140	1232	1334	1568
A / WE	mm	29.02	32.99	37.99	40.51	44.49	47.99	52.01	60.98
	in	737	838	965	1029	1130	1219	1321	1549
B	mm	48.43	62.99	70.87	74.53	85.24	93.70	100.79	114.57
	in	1295	1600	1800	1893	2165	2380	2560	2910
B1	mm	57.80	74.49	84.49	89.02	101.81	112.32	121.46	139.21
	in	1533	1892	2146	2261	2586	2853	3085	3536
E	mm	16.93	20.67	24.41	26.77	29.92	33.46	37.20	43.90
	in	430	525	620	680	760	850	945	1115
F	mm	-	47.68	53.23	55.83	64.25	70.94	75.75	85.28
	in	973	1211	1352	1418	1632	1802	1924	2166
Weight RF	lbs	1630.96	2534.60	3636.60	5950.80	7383.40	11130.20	14326.00	21819.60
	kg	740	1150	1650	2700	3350	5050	6500	9900
Weight WE	lbs	1418.94	2205.10	3163.84	5177.20	6423.56	9683.27	12463.62	18983.05
	kg	643.8	1000.5	1435.5	2349	2914.5	4393.5	5655	8613

SLAB GATE VALVES, CLASS 1500

(HANDWHEEL OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 4" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
5912	Handwheel	RF
5913	Handwheel	RTJ
5914	Handwheel	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr. 70 + ENP or ASTM A105N+ ENP
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + ENP
17	Drain Plug	Cs + Zn
18	Seat insert	RPTFE or Nylon
19	Yoke	ASTM A216 Gr. WCB
20	Vent	Cs + Zn
21	Spring	Inconel X-750

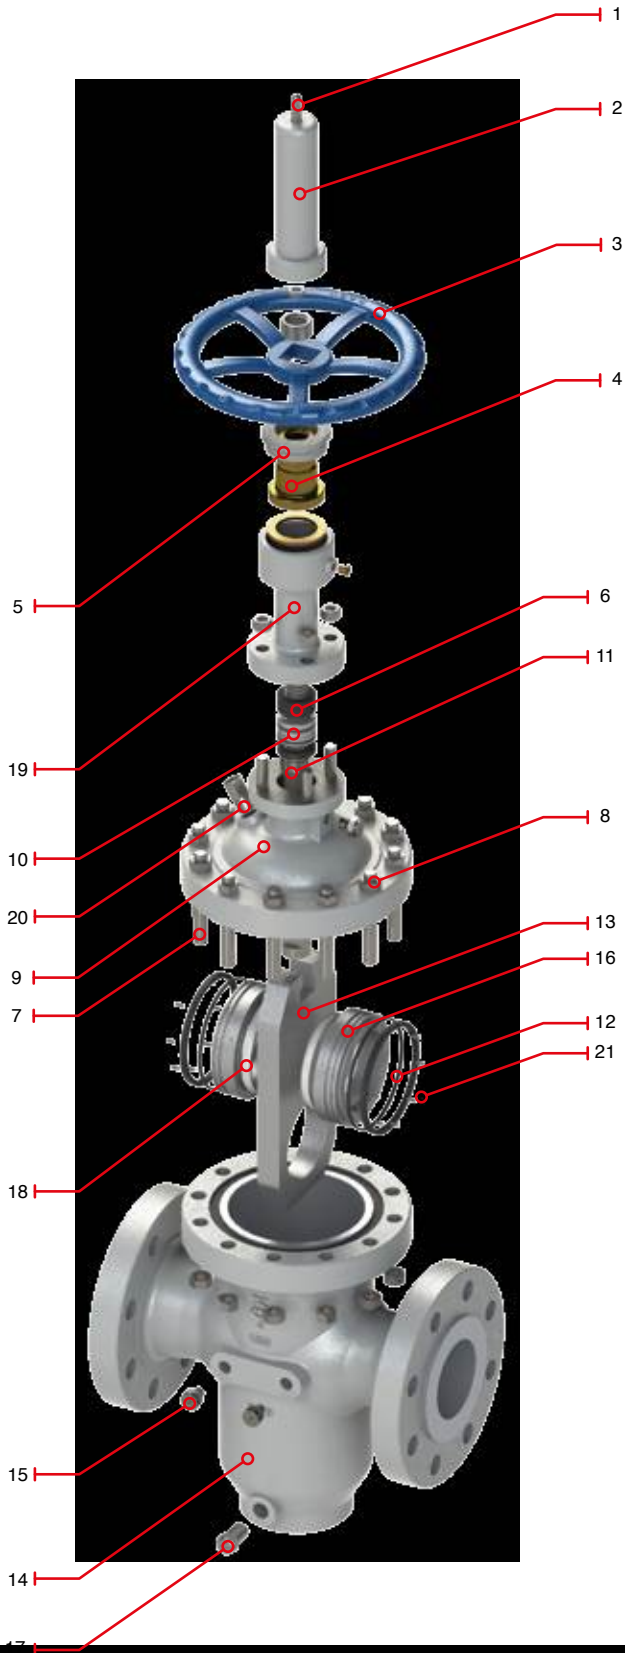


SLAB GATE VALVES, CLASS 1500

(HANDWHEEL OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 2" to 4" Handwheel operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
5912	Handwheel	RF
5913	Handwheel	RTJ
5914	Handwheel	WE

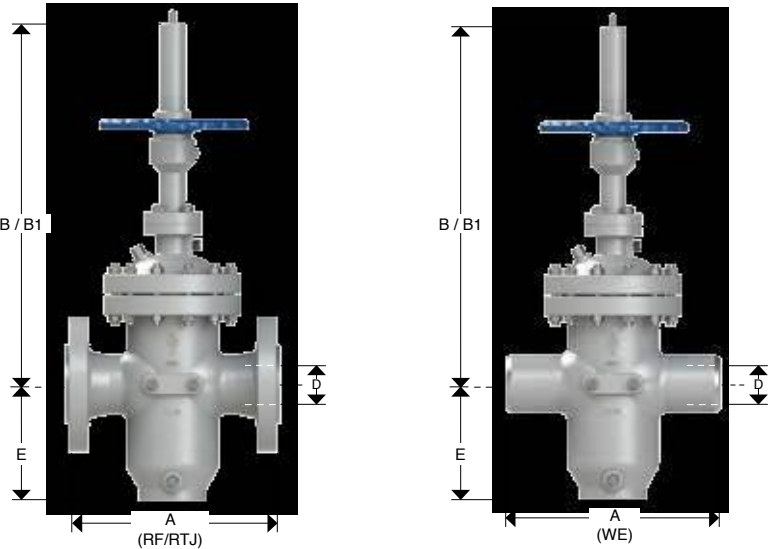

Dimensions

NOM SIZE	in	2"	3"	4"	6"
OPERATION		HW	HW	HW	HW
D	in	1.93	2.91	3.94	5.67
	mm	49	74	100	144
A / RF	in	14.49	18.50	21.50	27.76
	mm	368	470	546	705
A / RTJ	in	14.61	18.62	21.61	27.99
	mm	371	473	549	711
A / WE	in	14.49	18.50	21.50	27.76
	mm	368	470	546	705
B	in	23.07	25.47	30.71	40.94
	mm	586	647	780	1040
B1	in	25.83	29.45	35.83	47.95
	mm	656	748	910	1218
E	in	6.69	7.68	8.66	12.52
	mm	170	195	220	318
Weight RF	lbs	143.26	639.16	1024.86	2181.96
	kg	65	290	465	990
Weight WE	lbs	124.64	556.07	891.63	1898.31
	kg	56.55	252.3	404.55	861.3

SLAB GATE VALVES, CLASS 1500

(GEAR OPERATED)


DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 6" to 24" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
5922	Gear Operator	RF
5923	Gear Operator	RTJ
5924	Gear Operator	WE

Regular Bill of Materials

No.	Description	Standard Material
1	Indicator Rod	SS 410
2	Stem Protector	CS
3	Handwheel	A197
4	Stem Nut	ASTM A439 D2
5	Thrust Bearing	AISI 1035
6	Stem Packing	Graphite
7	Bolt	ASTM A193 Gr. B7M
8	Nut	ASTM A194 Gr. 2HM
9	Bonnet	ASTM A216 Gr. WCB
10	O-Ring Packing Seat	Viton
11	Stem	ASTM A276 Gr. 410
12	O-Ring	Viton
13	Gate	ASTM A515 Gr.70+ TCC or ASTM A105N+ TCC
14	Body	ASTM A216 Gr. WCB
15	Sealant Fitting	Cs + Zn
16	Seat	ASTM A105N + TCC
17	Drain Plug	Cs + Zn
18	Yoke	ASTM A216 Gr. WCB
19	Gland Flange	CS
20	Vent	Cs + Zn
21	Springs	Inconel X-750
22	Seat Insert	RPTFE or Nylon

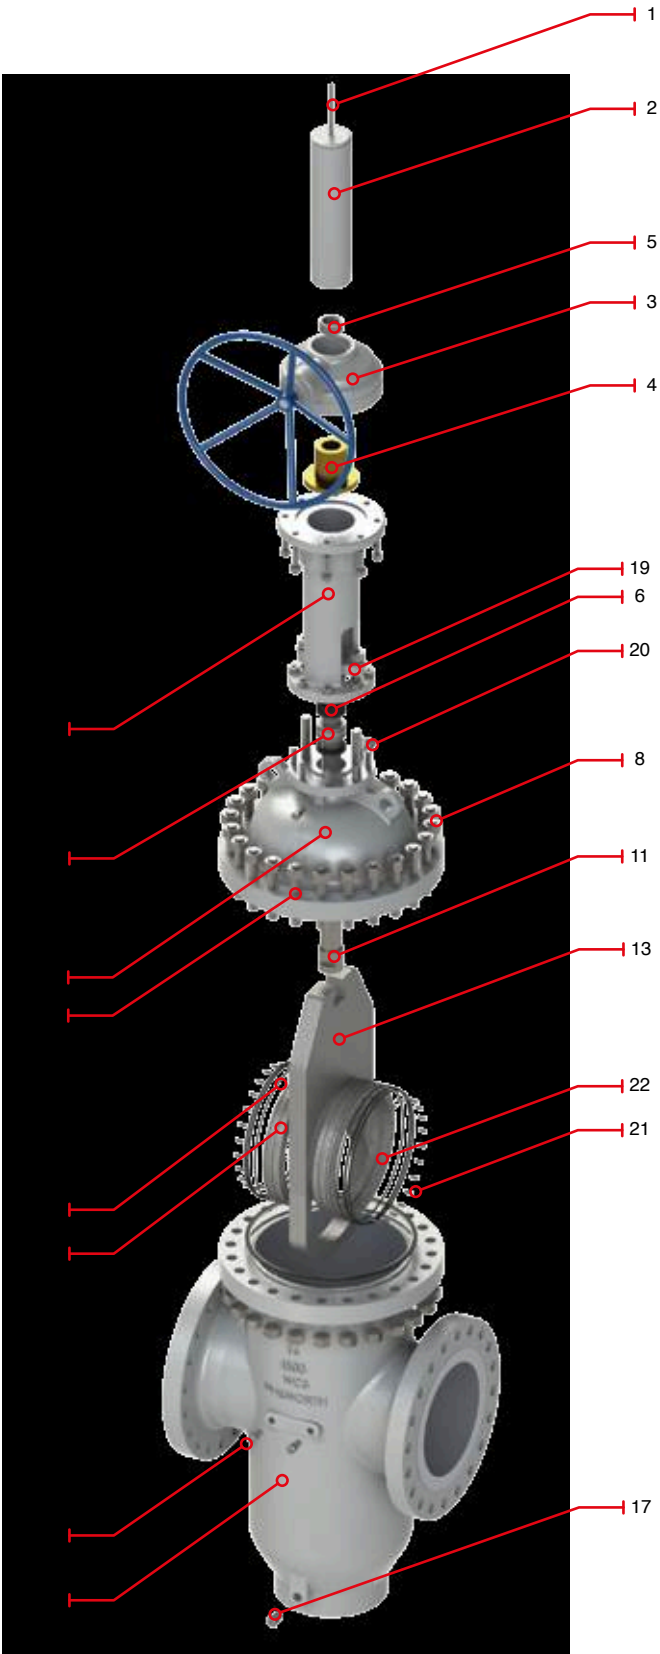


SLAB GATE VALVES, CLASS 1500

(GEAR OPERATED)

DESIGN FEATURES:

- Design in accordance with API-6D
- Rising stem
- Flange dimensions as per ASME B16.5
- For valves 26" and larger, flange dimensions as per ASME B16.47 Series A
- End to end dimensions as per API-6D table 2 and figure 2 (valves not listed in this table as per ASME B16.10)
- WE dimensions as per ASME B31.4 and/or ASME B31.8 and tapered as per ASME B16.25 figure 1
- Full opening
- Size from 6" to 24" Gear operated as standard

FIGURE No.	OPERATION	TYPE ON ENDS
5922	Gear Operator	RF
5923	Gear Operator	RTJ
5924	Gear Operator	WE

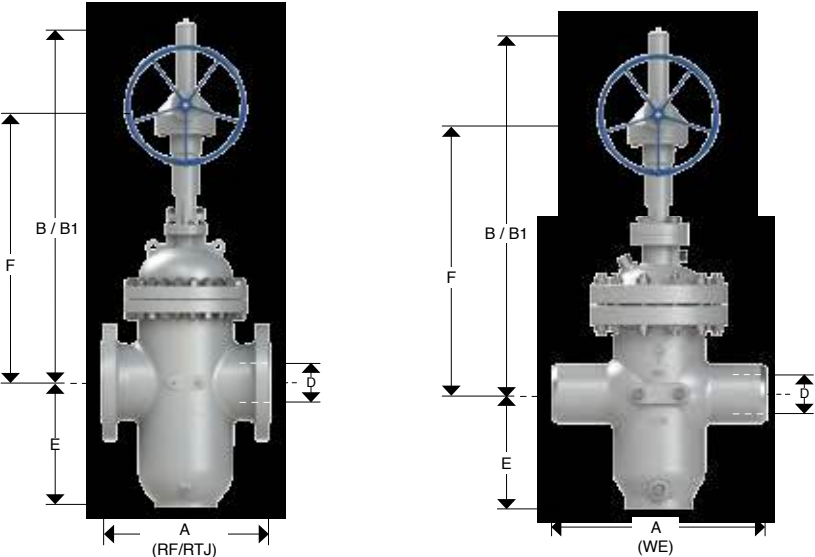

Dimensions

NOM SIZE	in	8"	10"	12"	14"	16"	18"	20"	24"
OPERATION		GO	GO	GO	GO	GO	GO	GO	GO
D	mm	7.56	9.41	11.30	12.40	14.17	15.98	17.87	21.50
	in	192	239	287	315	360	406	454	546
A / RF	mm	32.76	39.02	44.49	49.49	54.49	60.51	65.51	76.50
	in	832	991	1130	1257	1384	1537	1664	1943
A / RTJ	mm	33.11	39.37	45.12	50.24	55.39	61.38	66.38	77.64
	in	841	1000	1146	1276	1407	1559	1686	1972
A / WE	mm	32.76	39.02	44.49	49.49	54.49	60.51	65.51	76.50
	in	832	991	1130	1257	1384	1537	1664	1943
B	mm	50.98	62.99	70.87	74.49	85.24	93.70	100.79	114.57
	in	1295	1600	1800	1892	2165	2380	2560	2910
B1	mm	60.00	73.98	83.82	88.62	101.26	111.65	119.92	138.23
	in	1524	1879	2129	2251	2572	2836	3046	3511
E	mm	16.22	20.16	23.70	26.06	29.13	32.52	36.30	42.72
	in	412	512	602	662	740	826	922	1085
F	mm	38.46	48.15	53.58	55.75	64.65	70.98	76.85	85.94
	in	977	1223	1361	1416	1642	1803	1952	2183
Weight RF	lbs	3658.64	5631.22	10056.85	14804.27	22117.14	32326.07	40322.18	56620.76
	kg	1660	2555	4563	6717	10035	14667	18295	25690
Weight WE	lbs	3183.02	4899.16	8749.46	12879.71	19241.91	28123.68	35080.30	49260.06
	kg	1444.2	2222.85	3969.81	5843.79	8730.45	12760.29	15916.65	22350.3