




Pressure Seal Bonnet Gate Valves

ASME B16.34/API 600

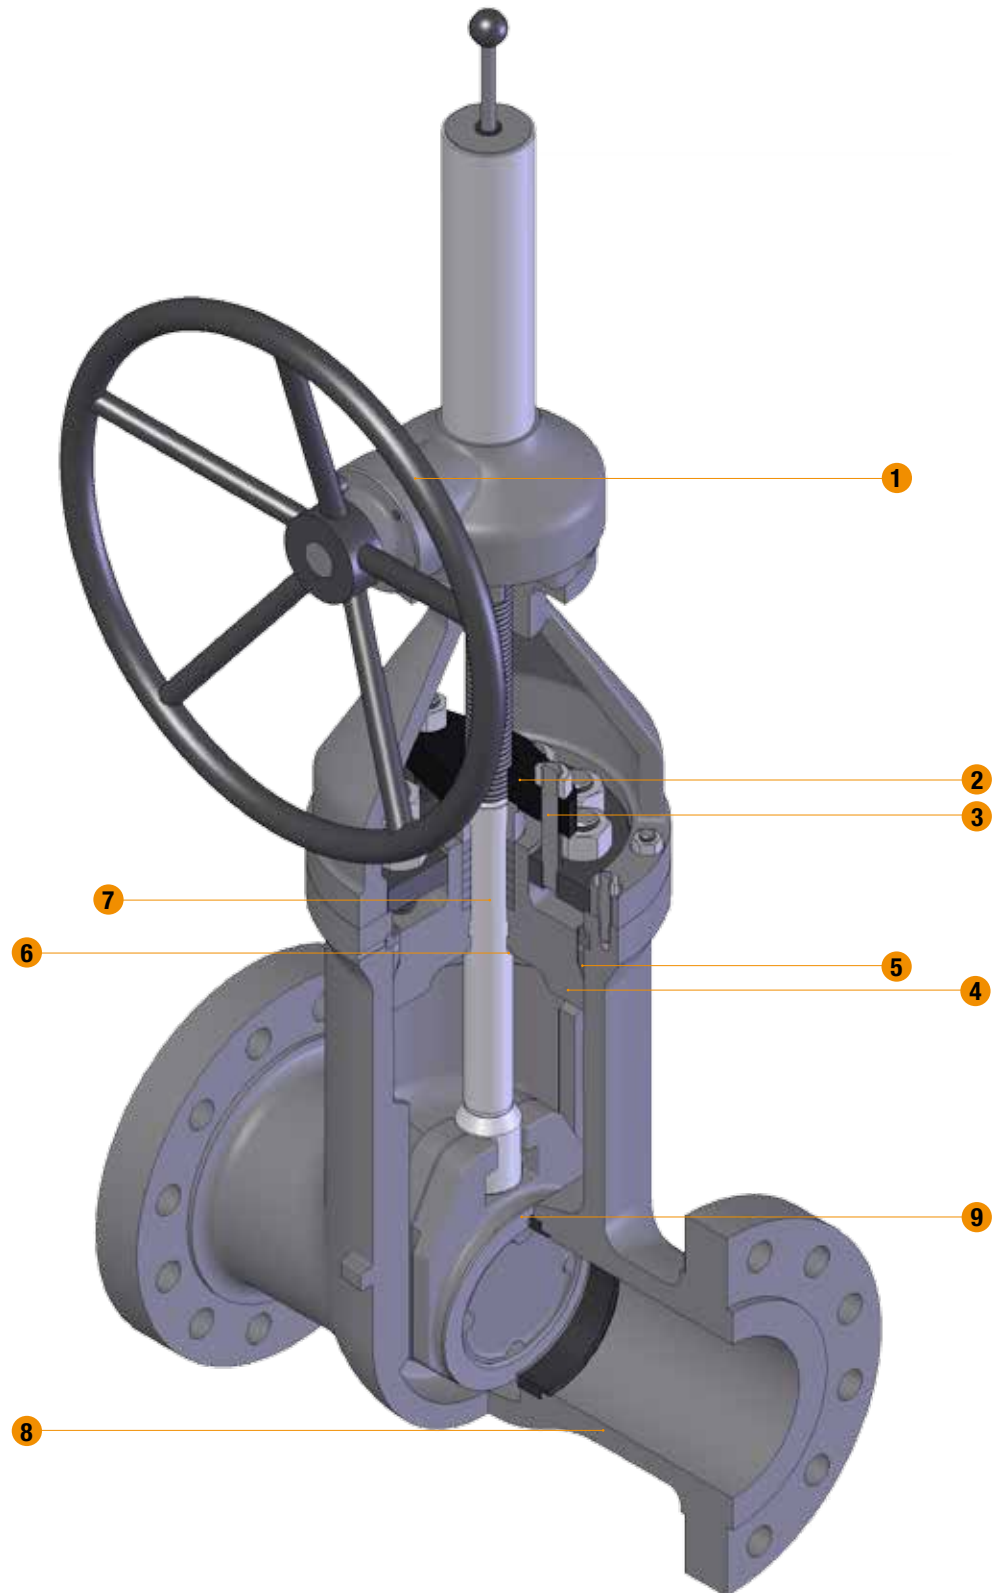

**EXTENDED BONNET
FOR HIGH TEMPERATURE**



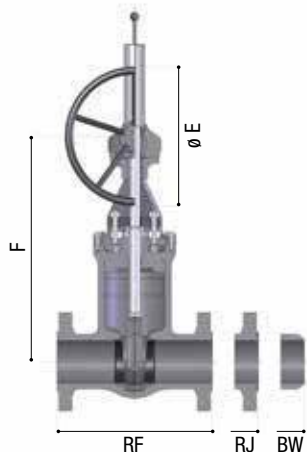

Class ASME 600 (PN 100)



FIGURE NUMBERS - CLASS ASME 600 - ALL SIZES

SZ 600: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
RF-BW	292	356	432	559	660	787	838	889	991
BW (short)	178	254	305	457	584	711	813	/	/
RJ	295	359	435	562	663	790	841	892	994
C-closed	403	487	571	848	946	1.140	1.315	1.427	1.665
D-open	459	571	683	1.010	1.164	1.398	1.634	1.779	2.106
E	300	350	350	BG	BG	BG	BG	BG	BG
F	/	/	/	811	957	1.128	1.382	1.496	1.650
Approximate WEIGHT (Kg)									
FLANGED	24	48	87	182	313	541	876	1.211	1.546
BW	17	35	60	133	242	426	745	1.064	1.383

SIZE	18"	20"	22"	24"	26"	28"	30"	32"	34"
RF-BW	1.092	1.194	1.295	1.397	1.448	1.549	1.651	1.778	1.930
BW (short)	/	/	/	/	/	/	/	/	/
RJ	1.095	1.200	1.305	1.407	1.461	1.562	1.664	1.794	1.946
C-closed	1.840	2.015	2.190	2.365	2.540	2.715	2.890	3.065	3.240
D-open	2.342	2.578	2.814	3.050	3.286	3.522	3.758	3.994	4.230
E	BG	BG	BG	BG	BG	BG	BG	BG	BG
F	1.824	1.998	2.172	2.346	2.520	2.694	2.868	3.042	3.216
Approximate WEIGHT (Kg)									
FLANGED	1.881	2.216	2.551	2.886	3.221	3.556	3.891	4.226	4.561
BW	1.702	2.021	2.340	2.659	2.978	3.297	3.616	3.935	4.254

SIZE	36"
RF-BW	2.082
BW (short)	/
RJ	2.099
C-closed	3.415
D-open	4.466
E	BG
F	3.390
Approximate WEIGHT (Kg)	
FLANGED	4.896
BW	4.573

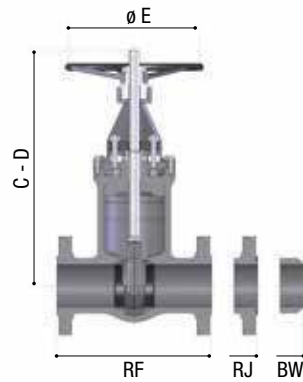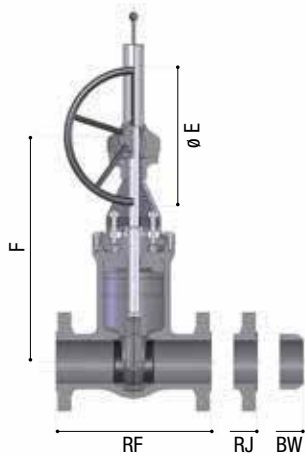


Class ASME 900 (PN 150)

FIGURE NUMBERS - CLASS ASME 900 - ALL SIZES

SZ 900: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
RF-BW	368	381	457	610	737	838	965	1.029	1.130
BW (short)	216	305	356	508	660	787	914	991	1.092
RJ	371	384	460	613	740	841	968	1.039	1.140
C-closed	416	480	594	829	948	1.096	1.156	1.480	1.783
D-open	476	558	698	982	1.143	1.356	1.316	1.795	2.171
E	300	350	450	BG	BG	BG	BG	BG	BG
F	/	/	/	808	907	1.224	1.275	1.433	1.894
Approximate WEIGHT (Kg)									
FLANGED	28	66	130	210	289	620	962	1.588	2.213
BW	21	50	101	171	240	466	822	1.388	1.953

SIZE	18"	20"	24"	26"	28"	30"	32"	34"	36"
RF-BW	1.219	1.321	1.549	1.676	1.803	1.930	1.981	2.032	2.083
BW (short)	/	/	/	/	/	/	/	/	/
RJ	1.232	1.334	1.568	/	/	/	/	/	/
C-closed	1.765	1.900	2.384	2.360	2.536	2.712	2.888	2.903	3.239
D-open	2.193	2.345	2.921	2.999	3.229	3.459	3.689	3.709	4.229
E	BG	BG	BG	BG	BG	BG	BG	BG	BG
F	1.732	1.972	2.354	2.431	2.609	2.788	2.966	3.070	3.610
Approximate WEIGHT (Kg)									
FLANGED	2.839	3.465	4.090	/	/	/	/	/	/
BW	2.519	3.085	3.650	7.731	8.564	9.396	10.228	11.061	11.893

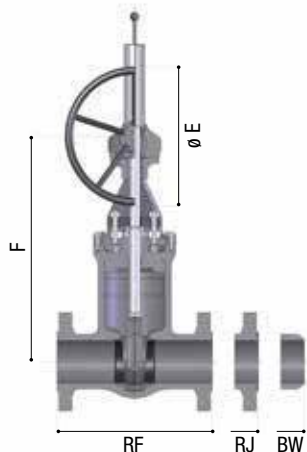


Class ASME 1500 (PN 250)

FIGURE NUMBERS - CLASS ASME 1500 - ALL SIZES

SZ 1500: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
RF-BW	368	470	546	705	832	991	1.130	1.257	1.384
BW (short)	216	305	406	559	711	864	991	1.067	1.194
RJ	371	422	473	549	711	842	1.001	1.146	1.276
C-closed	376	480	594	775	1.064	1.189	1.316	1.586	1.777
D-open	428	558	698	930	1.256	1.433	1.606	1.898	2.130
E	300	350	BG	BG	BG	BG	BG	BG	BG
F	/	/	614	764	1.135	1.174	1.459	1.745	1.909
Approximate WEIGHT (Kg)									
FLANGED	32	90	144	330	638	1.072	1.783	2.493	3.204
BW	23	58	105	243	490	822	1.388	1.953	2.519

SIZE	18"	20"	24"	26"	28"	30"	32"	34"	36"
RF-BW	1.537	1.664	1.943	2.090	2.237	2.383	2.525	2.666	2.808
BW (short)	1.346	1.473	/	/	/	/	/	/	/
RJ	1.406	1.559	/	/	/	/	/	/	/
C-closed	1.840	1.959	2.384	2.567	2.750	2.933	3.116	3.299	3.482
D-open	2.240	2.468	2.921	3.154	3.387	3.620	3.853	4.086	4.319
E	BG	BG	BG	BG	BG	BG	BG	BG	BG
F	1.998	2.156	2.693	2.655	2.899	3.143	3.387	3.631	3.875
Approximate WEIGHT (Kg)									
FLANGED	4.056	5.484	8.340	/	/	/	/	/	/
BW	3.380	4.570	6.950	8.140	9.330	10.520	11.710	12.900	14.090

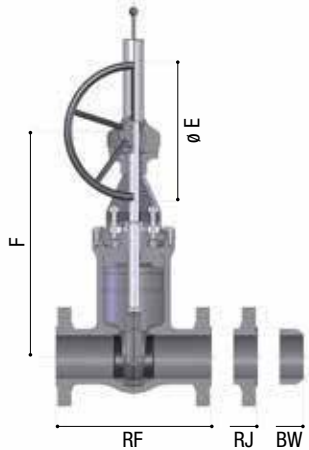

Class ASME 2500 (PN 420)

FIGURE NUMBERS - CLASS ASME 900 - ALL SIZES


SZ 2500: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT


SIZE	2"	2½"	3"	4"	6"	8"	10"	12"	14"
RF-BW	451	508	578	673	914	1.022	1.270	1.422	1.637
BW (short)	279	330	368	457	610	762	914	1.041	1.118
RJ	454	514	584	683	927	1.038	1.292	1.444	/
C-closed	487	467	594	684	9.52	1.202	1.453	1.716	1.904
D-open	564	657	666	775	1.086	1.368	1.666	1.967	2.182
E	300	350	BG	BG	BG	BG	BG	BG	BG
F	/	/	606	676	1.041	1.191	1.549	1.876	2.018
Approximate WEIGHT (Kg)									
FLANGED	98	123	147	196	587	1.960	2.217	3.396	/
BW	70	88	105	140	419	1.400	1.584	2.426	2.511

SIZE	16"	18"	20"	24"	26"
RF-BW	1.756	2.024	2.218	2.606	2.800
BW (short)	1245	1397	/	/	/
RJ	/	/	/	/	/
C-closed	2.004	2.148	2.292	2.615	2.724
D-open	2.313	2.421	2.583	3.092	3.069
E	BG	BG	BG	BG	BG
F	2.134	2.107	2.249	2.835	2.675
Approximate WEIGHT (Kg)					
FLANGED	/	/	/	/	/
BW	2.595	2.680	2.764	2.934	3.019

Pressure Seal Bonnet Gate Double Disc

ASME B16.34/API 600

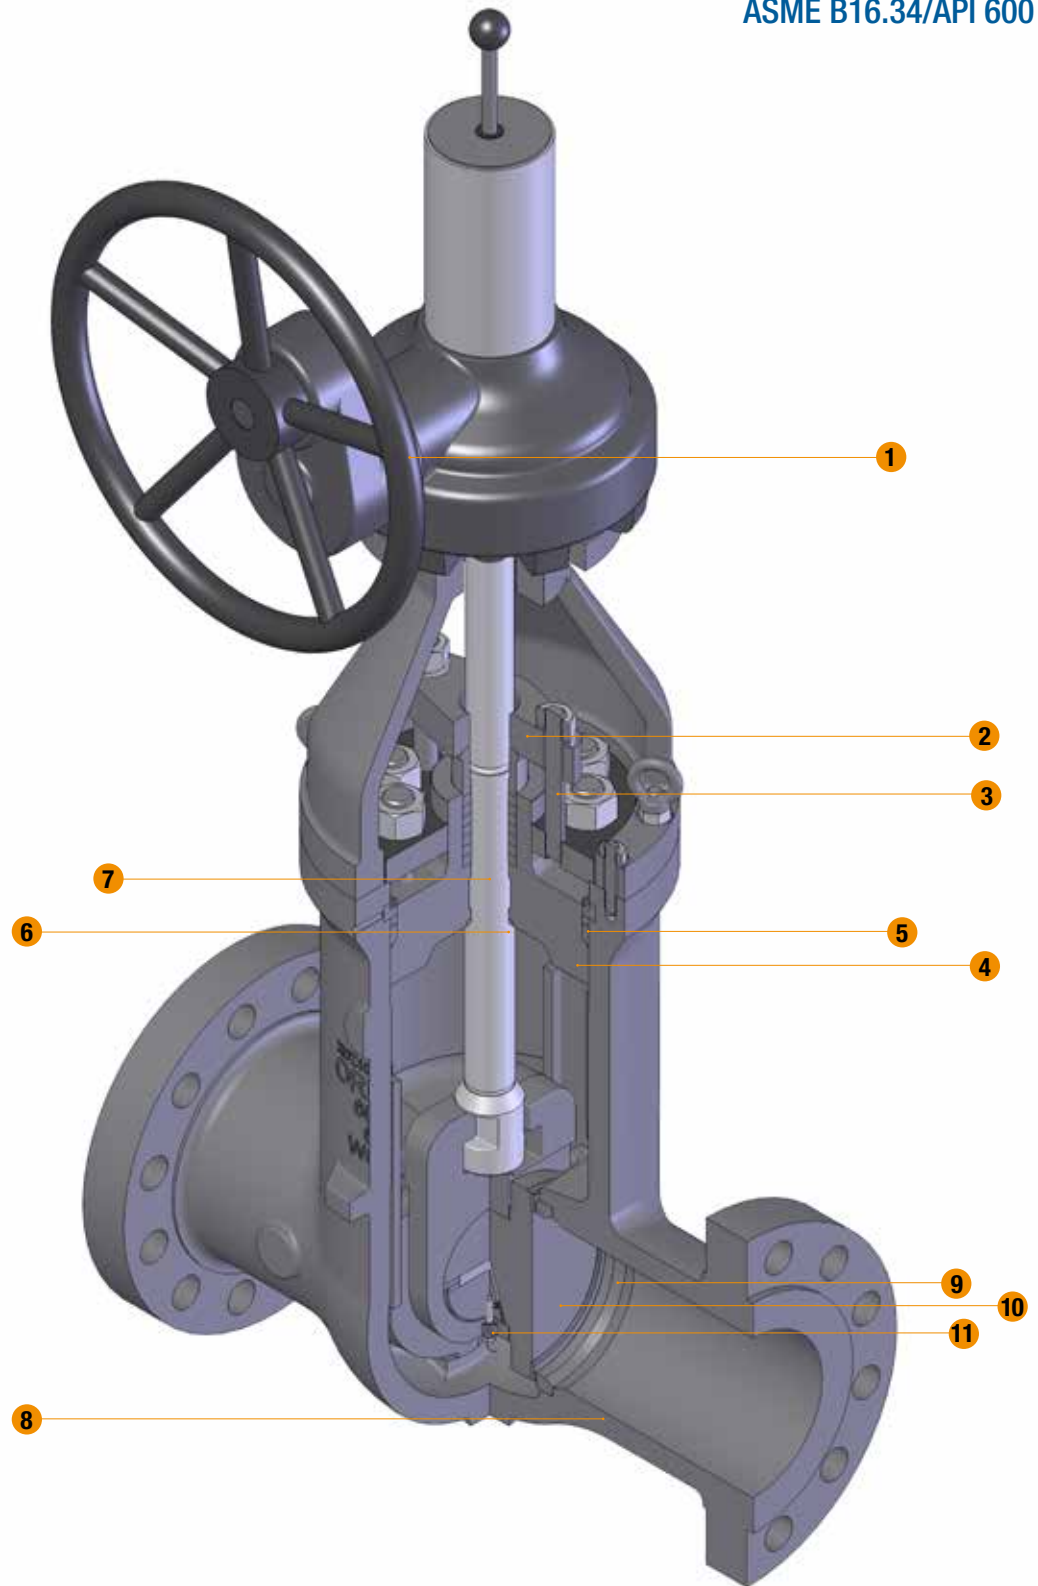

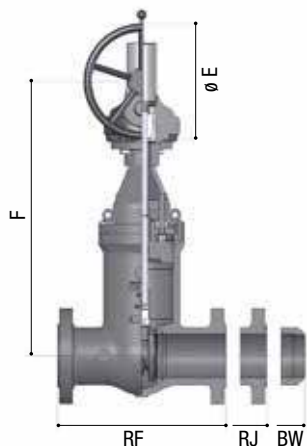

Class ASME 600 (PN 100)


FIGURE NUMBERS - CLASS ASME 600 - ALL SIZES

DZ 600: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
RF-BW	292	356	432	559	660	787	838	889	991
BW (short)	178	254	305	457	584	711	813	/	/
RJ	295	359	435	562	663	790	841	892	994
C-closed	403	493	571	847	997	1.140	1.315	1.427	1.665
D-open	459	576	683	1.011	1.212	1.398	1.634	1.779	2.106
E	300	350	350	BG	BG	BG	BG	BG	BG
F	/	/	/	811	996	1.128	1.382	1.496	1.650
Approximate WEIGHT (Kg)									
FLANGED	24	48	87	182	313	541	876	1.211	1.546
BW	17	35	60	133	242	426	745	1.064	1.383

SIZE	18"	20"	22"	24"	26"	28"	30"	32"	34"
RF-BW	1.092	1.194	1.295	1.397	1.448	1.549	1.651	1.778	1.930
BW (short)	/	/	/	/	/	/	/	/	/
RJ	1.095	1.200	1.305	1.407	1.461	1.562	1.664	1.794	1.946
C-closed	1.840	1.988	2.190	2.365	2.540	2.715	2.890	3.065	3.240
D-open	2.342	2.530	2.814	3.050	3.286	3.522	3.758	3.994	4.230
E	BG	BG	BG	BG	BG	BG	BG	BG	BG
F	1.824	1.998	2.172	2.346	2.520	2.694	2.868	3.042	3.216
Approximate WEIGHT (Kg)									
FLANGED	1.881	2.216	2.551	2.886	3.221	3.556	3.891	4.226	4.561
BW	1.702	2.021	2.340	2.659	2.978	3.297	3.616	3.935	4.254

SIZE	36"
RF-BW	2.082
BW (short)	/
RJ	2.099
C-closed	3.415
D-open	4.466
E	BG
F	3.390
Approximate WEIGHT (Kg)	
FLANGED	4.896
BW	4.573

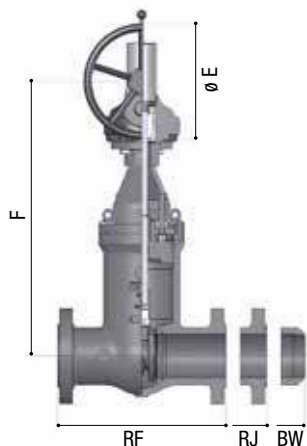


Class ASME 900 (PN 150)

FIGURE NUMBERS - CLASS ASME 900 - ALL SIZES

DZ 900: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
RF-BW	368	381	457	610	737	838	965	1.029	1.130
BW (short)	216	305	356	508	660	787	914	991	1.092
RJ	371	384	460	613	740	841	968	1.039	1.140
C-closed	416	559	594	902	948	1.096	1.353	1.480	1.782
D-open	476	642	698	1.059	1.143	1.356	1.645	1.795	2.161
E	300	350	450	BG	BG	BG	BG	BG	BG
F	/	/	/	878	907	1.224	1.467	1.433	1.894
Approximate WEIGHT (Kg)									
FLANGED	28	66	130	210	289	620	962	1.588	2.213
BW	21	50	101	171	240	466	822	1.388	1.953

SIZE	18"	20"	24"	26"	28"	30"	32"	34"	36"
RF-BW	1.219	1.321	1.549	1.676	1.803	1.930	1.981	2.032	2.083
BW (short)	/	/	/	/	/	/	/	/	/
RJ	1.232	1.334	1.568	/	/	/	/	/	/
C-closed	1.765	1.900	2.384	2.360	2.536	2.712	2.888	2.903	3.239
D-open	2.193	2.345	2.921	2.999	3.229	3.459	3.689	3.709	4.229
E	BG	BG	BG	BG	BG	BG	BG	BG	BG
F	1.732	1.972	2.354	2.431	2.609	2.788	2.966	3.070	3.610
Approximate WEIGHT (Kg)									
FLANGED	2.839	3.465	4.090	/	/	/	/	/	/
BW	2.519	3.085	3.650	7.731	8.564	9.396	10.228	11.061	11.893

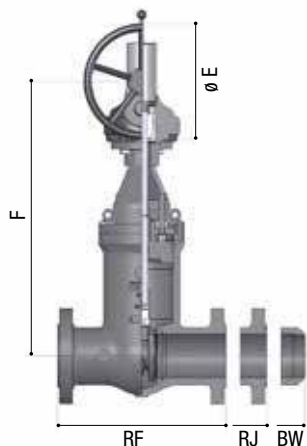


Class ASME 1500 (PN 250)

FIGURE NUMBERS - CLASS ASME 1500 - ALL SIZES

DZ 1500: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT

SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"
RF-BW	368	470	546	705	832	991	1.130	1.257	1.384
BW (short)	216	305	406	559	711	864	991	1.067	1.194
RJ	371	422	473	549	711	842	1.001	1.146	1.276
C-closed	376	724	613	775	1.013	1.189	1.316	1.586	1.777
D-open	428	807	720	930	1.222	1.433	1.606	1.898	2.130
E	300	BG	BG	BG	BG	BG	BG	BG	BG
F	/	679	614	764	1.106	1.174	1.459	1.745	1.909
Approximate WEIGHT (Kg)									
FLANGED	32	90	144	330	638	1.072	1.783	2.493	3.204
BW	23	58	105	243	490	822	1.388	1.953	2.519

SIZE	18"	20"	24"	26"	28"	30"	32"	34"	36"
RF-BW	1.537	1.664	1.943	2.090	2.237	2.383	2.525	2.666	2.808
BW (short)	1.346	1.473	/	/	/	/	/	/	/
RJ	1.406	1.559	/	/	/	/	/	/	/
C-closed	1.840	1.959	2.384	2.567	2.750	2.933	3.116	3.299	3.482
D-open	2.240	2.468	2.921	3.154	3.387	3.620	3.853	4.086	4.319
E	BG	BG	BG	BG	BG	BG	BG	BG	BG
F	1.998	2.156	2.693	2.655	2.899	3.143	3.387	3.631	3.875
Approximate WEIGHT (Kg)									
FLANGED	4.056	5.484	8.340	/	/	/	/	/	/
BW	3.380	4.570	6.950	8.140	9.330	10.520	11.710	12.900	14.090

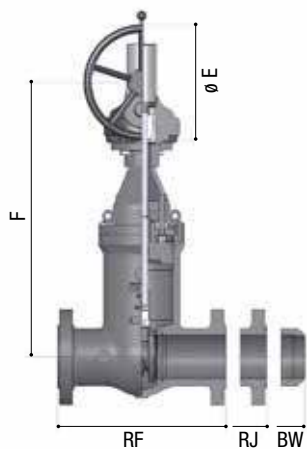

Class ASME 2500 (PN 420)

FIGURE NUMBERS - CLASS ASME 900 - ALL SIZES

DZ 2500: RF - RAISED FACE • BW - WELDING ENDS • RJ - RING JOINT

SIZE	2"	2½"	3"	4"	6"	8"	10"	12"	14"
RF-BW	451	508	578	673	914	1.022	1.270	1.422	1.637
BW (short)	279	330	368	457	610	762	914	1.041	1.118
RJ	454	514	584	683	927	1.038	1.292	1.444	/
C-closed	487	467	594	684	952	1.202	1.453	1.716	1.904
D-open	564	657	666	775	1.086	1.368	1.666	1.967	2.182
E	300	350	BG	BG	BG	BG	BG	BG	BG
F	/	/	606	676	1.081	1.191	1.549	1.876	2.018

Approximate WEIGHT (Kg)

FLANGED	98	123	147	196	587	1.960	2.217	3.396	/
BW	70	88	105	140	419	1.400	1.584	2.426	2.511

SIZE	16"	18"	20"	24"	26"
RF-BW	1.756	2.024	2.218	2.606	2.800
BW (short)	1.245	1.397	/	/	/
RJ	/	/	/	/	/
C-closed	2.004	2.148	2.292	2.615	2.724
D-open	2.313	2.421	2.583	3.092	3.069
E	BG	BG	BG	BG	BG
F	2.134	2.107	2.249	2.835	2.675

Approximate WEIGHT (Kg)

FLANGED	/	/	/	/	/
BW	2.595	2.680	2.764	2.934	3.019