

API 602 GLOBE VALVES TH & SW, CLASS 800

Design Characteristics

- API 602 & ASME B16.34
- Bolted or Welded Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard or Full Port
- Threaded, Socket Weld or Threaded x Socket Weld
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	800 Bolted Bonnet	5520S	Threaded
		5520SW	Socket Weld
		5520SSW	Threaded X Socket Weld
Full	800 Bolted Bonnet	5528S	Threaded
		5528SW	Socket Weld
		5528SSW	Threaded X Socket Weld
Standard	800 Welded Bonnet	5527S	Threaded
		5527SW	Socket Weld
		5527SSW	Threaded X Socket Weld
Full	800 Welded Bonnet	5529S	Threaded
		5529SW	Socket Weld
		5529SSW	Threaded X Socket Weld

Dimensions and Weights

Fig. 5520 Standard Port, Bolted Bonnet

Sizes	in	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	6	10	13	19	25	32	38	51
A	in	3.11	3.11	3.11	3.62	4.37	4.72	5.98	6.77
	mm	79	79	79	92	111	120	152	172
B (open)	in	6.06	6.06	6.22	6.22	7.55	8.94	9.45	10.98
	mm	154	154	158	158	192	227	240	279
C	in	3.94	3.94	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	100	100	125	160	160	180
D	in	0.26	0.39	0.39	0.51	.68	0.91	1.12	1.38
	mm	6.5	10.0	10.0	13.0	17.5	23.0	28.5	35.0
E	in	1.34	1.34	1.34	1.57	1.92	2.24	2.52	3.07
	mm	34	34	34	40	49	58	64	78
Weight	lb	4.62	4.62	4.4	4.84	5.5	12.1	15.4	25.3
	kg	2.1	2.1	2.0	2.2	2.5	5.5	7.0	11.5

Fig. 5527 Standard Port, Welded Bonnet


Sizes	in	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	6	10	13	19	25	32	38	51
A	in	3.11	3.11	3.11	3.62	4.37	4.72	5.98	6.77
	mm	79	79	79	92	111	120	152	172
B (open)	in	6.06	6.06	6.22	6.22	7.56	8.94	9.45	10.98
	mm	154	154	158	158	192	227	240	279
C	in	3.94	3.94	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	100	100	125	160	160	180
D	in	0.26	0.39	0.39	0.51	0.69	0.91	1.12	1.38
	mm	6.5	10.0	10.0	13.0	17.5	23.0	28.5	35.0
E	in	1.34	1.34	1.34	1.57	1.93	2.28	2.52	3.07
	mm	34	34	34	40	49	58	64	78
Weight	lb	4.4	4.4	4.18	4.62	8.14	11.88	15.18	25.08
	kg	2.0	2.0	1.9	2.1	3.7	5.4	6.9	11.4

Fig. 5528 Full Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	3.62	4.37	4.72	5.98	6.77	8.66
	mm	92	111	120	152	172	220
B (open)	in	6.22	7.56	8.94	9.45	10.98	12.80
	mm	158	192	227	240	279	325
C	in	6.29	4.92	6.30	6.30	7.09	7.87
	mm	160	125	160	160	180	200
D	in	0.51	0.69	0.91	1.12	1.40	1.85
	mm	13	17.5	17.5	28.5	35.5	47.0
E	in	1.57	1.93	2.28	2.52	3.07	3.46
	mm	40	49	58	64	78	88
Weight	lb	4.84	8.36	12.1	15.4	25.3	26.4
	kg	2.2	3.8	5.5	7.0	11.5	12.0

Fig. 5529 Full Port, Welded Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	3.62	4.37	4.72	5.98	6.77	8.66
	mm	92	111	120	152	172	220
B (open)	in	6.22	7.56	8.94	9.45	10.98	12.80
	mm	158	192	227	240	279	325
C	in	3.94	4.92	6.30	6.30	7.09	7.87
	mm	100	125	160	160	180	200
D	in	0.51	0.69	0.91	1.12	1.42	1.85
	mm	13	17.5	23.0	28.5	36.0	47.0
E	in	1.57	1.93	2.28	2.52	3.11	3.46
	mm	40	49	58	64	79	88
Weight	lb	4.62	8.14	11.88	15.18	25.08	26.18
	kg	2.1	3.7	5.4	6.9	11.4	11.9

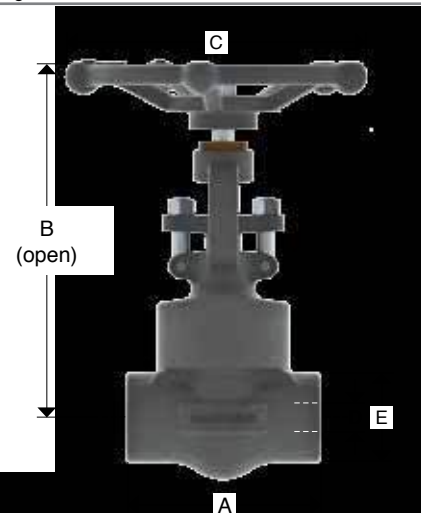

API 602 GLOBE VALVES TH & SW, CLASS 1500

Design Characteristics

- API 602 & ASME B16.34
- Bolted or Welded Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard or Full Port
- Threaded, Socket Weld or Threaded x Socket Weld
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	1500 Bolted Bonnet	5521S	Threaded
		5521SW	Socket Weld
		5521SSW	Threaded X Socket Weld
Full	1500 Bolted Bonnet	5538S	Threaded
		5538SW	Socket Weld
		5538SSW	Threaded X Socket Weld
Standard	1500 Welded Bonnet	5537S	Threaded
		5537SW	Socket Weld
		5537SSW	Threaded X Socket Weld
Full	1500 Welded Bonnet	5539S	Threaded
		5539SW	Socket Weld
		5539SSW	Threaded X Socket Weld

Dimensions and Weights

Fig. 5521 Standard Port, Bolted Bonnet

Sizes	in	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	6	10	13	19	25	32	38	51
A	in	3.11	3.62	3.62	4.37	4.72	5.98	6.77	8.66
	mm	79	92	92	111	120	152	172	220
B (open)	in	6.89	7.01	7.36	7.36	8.94	9.53	10.94	12.80
	mm	175	178	187	187	227	242	278	325
C	in	3.94	4.92	4.92	4.92	6.30	6.30	7.09	7.87
	mm	100	125	125	125	160	160	180	200
D	in	0.26	0.39	0.39	0.51	0.69	0.91	1.12	1.38
	mm	6.5	10.0	10.0	13.0	17.5	23.0	28.5	35.0
E	in	1.34	1.65	1.65	1.93	2.28	2.52	3.07	3.46
	mm	34	42	42	49	58	64	78	88.0
Weight	lb	6.6	6.6	7.7	8.8	13.86	17.6	27.5	42.9
	kg	3.0	3.0	3.5	4.0	6.3	8.0	12.5	19.5

Fig. 5537 Standard Port, Welded Bonnet



Sizes	in	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	6	10	13	19	25	32	38	51
A	in	3.11	3.62	4.37	4.37	4.72	5.98	6.77	8.66
	mm	79	92	111	111	120	152	172	220
B (open)	in	6.22	6.22	7.36	7.36	8.94	9.53	10.94	12.80
	mm	158	158	187	187	227	242	278	325
C	in	3.94	3.94	4.92	4.92	6.30	6.30	7.09	7.87
	mm	100	100	125	125	160	160	180	200
D	in	0.39	0.51	0.51	0.51	0.69	0.91	1.12	1.38
	mm	10	13	13	13	17.5	23.0	28.5	35.0
E	in	1.34	1.57	1.65	1.93	2.28	2.52	3.07	3.46
	mm	34	40	42	49	58	64	78	88.0
Weight	lb	6.16	6.6	7.26	8.36	13.42	17.16	27.06	42.46
	kg	2.8	3.0	3.3	3.8	6.1	7.8	12.3	19.3

Fig. 5538 Full Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.37	4.72	5.98	6.77	8.66	9.84
	mm	111	120	152	172	220	250
B (open)	in	7.36	8.94	9.53	10.94	12.80	13.98
	mm	187	227	242	278	325	355
C	in	4.92	6.30	6.30	7.09	7.87	7.87
	mm	125	160	160	180	200	200
D	in	0.51	0.69	0.91	1.12	1.38	1.85
	mm	13	17.5	23.0	28.5	35.0	47.0
E	in	1.93	2.28	2.52	3.07	3.46	3.46
	mm	49	58	64	78	88	88
Weight	lb	8.8	13.86	17.6	27.5	42.9	44
	kg	4.0	6.3	8.0	12.5	19.5	20.0

Fig. 5539 Full Port, Welded Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.37	4.72	5.98	6.77	8.66	8.66
	mm	111	120	152	172	220	220
B (open)	in	7.36	8.94	9.53	10.94	12.80	13.98
	mm	187	227	242	278	325	355
C	in	4.92	6.30	6.30	7.09	7.87	7.87
	mm	125	160	160	180	200	200
D	in	0.51	0.69	0.91	1.12	1.38	1.85
	mm	13	17.5	23.0	28.5	35.0	47.0
E	in	1.93	2.28	2.52	3.07	3.46	3.46
	mm	49	58	64	78	88	88
Weight	lb	8.58	13.86	17.38	27.28	42.68	43.78
	kg	3.9	6.3	7.9	12.4	19.4	19.9

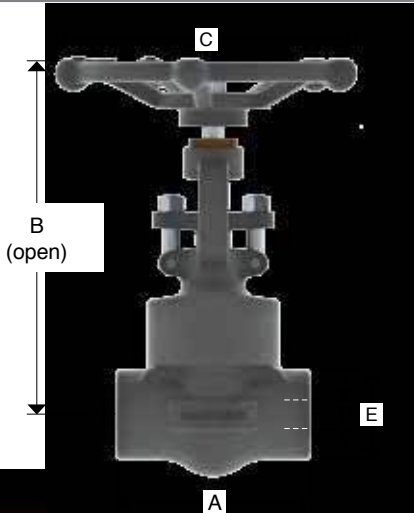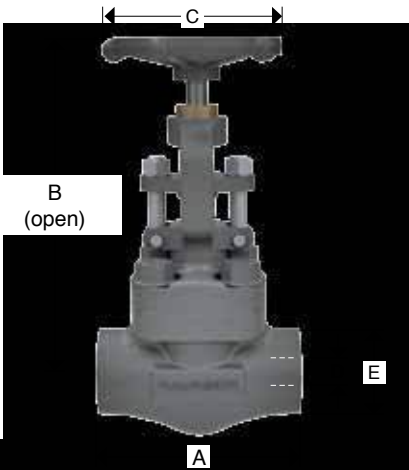

API 602 GLOBE VALVES TH & SW, CLASS 2500

Design Characteristics

- API 602 & ASME B16.34
- Welded Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard or Full Port
- Threaded, Socket Weld or Threaded x Socket Weld
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	2500	5522S	Threaded
		5522SW	Socket Weld
		5522SSW	Threaded X Socket Weld
Full	2500	5622S	Threaded
		5622SW	Socket Weld
		5622SSW	Threaded X Socket Weld

Dimensions and Weights

Fig. 5522 Welded Bonnet, Standard Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	5.91	5.91	6.69	7.87	7.87	9.84
	mm	150	150	170	200	200	250
B (open)	in	11.5	11.5	13.5	15.0	15	17.4
	mm	293	293	344	383	383	442
C	in	6.30	6.30	7.87	9.84	9.84	11.81
	mm	160	160	200	250	250	300
D	in	.43	.43	.55	.62	.98	1.1
	mm	11	11	14	16	25	28
E	in	2.05	2.05	2.52	3.15	3.15	3.74
	mm	52.0	52.0	64.0	80.0	80.0	95.0
Weight	lb	24.2	23.76	26.62	48.4	47.74	81.4
	kg	11	10.8	12.1	22	21.7	37

Fig. 5622 Welded Bonnet, Full Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	5.91	6.69	7.87	7.87	9.84	PCR
	mm	150	170	200	200	250	
B (open)	in	11.5	13.5	15	15	17.4	PCR
	mm	293	344	383	383	442	
C	in	6.30	7.87	9.84	9.84	11.81	PCR
	mm	160	200	250	250	300	
D	in	.43	.55	.62	.98	1.1	PCR
	mm	11	14	16	25	28	
E	in	2.05	2.52	3.15	3.15	3.74	PCR
	mm	52.0	64.0	80.0	80.0	95.0	
Weight	lb	23.76	26.62	48.4	47.74	81.4	PCR
	kg	10.8	12.1	22	21.7	37	



API 602 GLOBE VALVES RF/RTJ, CLASS 150, 300 & 600

Design Characteristics

- API 602 & ASME B16.34
- Bolted Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard Port
- Integral flanged ends (Raised Face or Ring Type Joint)
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	150	5615RF 5615RTJ	Flanged Raised Face Flanged Ring Type Joint
Standard	300	5630RF 5630RTJ	Flanged Raised Face Flanged Ring Type Joint
Standard	600	5660RF 5660RTJ	Flanged Raised Face Flanged Ring Type Joint

Dimensions and Weights

Fig. 5615 Standard Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	4.25	4.63	5.00	5.50	6.50	8.00
	mm	108	117	127	140	165	203
A (RJ)	in	-	-	5.50	6.00	7.00	8.50
	mm	-	-	140	153	178	216
B (open)	in	6.02	6.22	7.56	8.94	9.44	10.98
	mm	153	158	192	227	240	279
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	.39	.51	.69	.91	1.12	1.4
	mm	10	13	17.5	23	28.5	35
Weight	lb	9.9	15.2	21.6	29.7	42.9	61.6
	kg	4.5	6.9	9.8	13.5	19.5	28.0

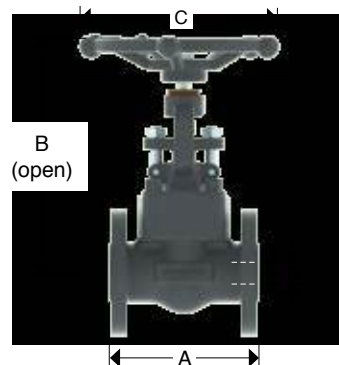


Fig. 5630 Standard Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	6.00	7.00	8.00	8.50	9.00	10.50
	mm	152	178	203	216	229	267
A (RJ)	in	6.44	7.50	8.50	9.00	9.50	11.13
	mm	163	191	216	229	242	283
B (open)	in	6.22	6.22	7.56	8.94	9.49	10.98
	mm	158	158	192	227	240	279
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	.39	.51	.69	.91	1.12	1.4
	mm	10	13	17.5	23	28.5	35
Weight	lb	10.56	16.94	24.2	36.96	46.64	71.72
	kg	4.80	7.70	11.00	16.80	21.20	32.60


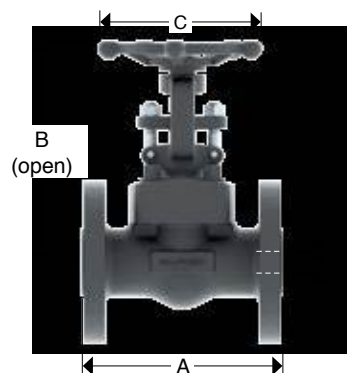


Fig. 5660 Standard Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	6.50	7.50	8.50	9.00	9.50	11.50
	mm	165	190	216	229	241	292
A (RJ)	in	6.44	7.50	8.50	9.00	9.50	11.63
	mm	163	190	216	229	241	295
B (open)	in	6.22	6.22	7.56	8.94	9.49	10.98
	mm	158	158	192	227	240	279
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	.39	.51	.69	.91	1.12	1.4
	mm	10	13	17.5	23	28.5	35
Weight	lb	12.32	17.16	27.5	37.4	51.7	85.36
	kg	5.60	7.80	12.50	17.00	23.50	38.80

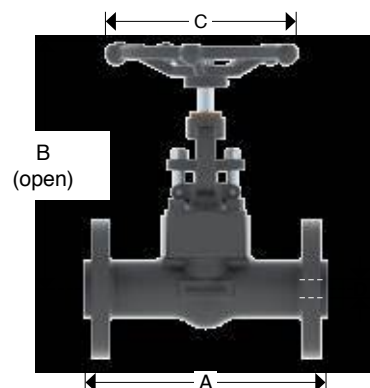

API 602 GLOBE VALVES RF/RTJ, CLASS 150, 300 & 600

Design Characteristics

- API 602 & ASME B16.34
- Bolted Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Full Port
- Integral flanged ends (Raised Face or Ring Type Joint)
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Full	150	5618RF	Flanged Raised Face
		5618RTJ	Flanged Ring Type Joint
Full	300	5638RF	Flanged Raised Face
		5638RTJ	Flanged Ring Type Joint
Full	600	5668RF	Flanged Raised Face
		5668RTJ	Flanged Ring Type Joint

Dimensions and Weights

Fig. 5618 Full Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	4.25	4.63	5.00	5.50	6.50	8.00
	mm	108	117	127	140	165	203
A (RJ)	in	-	-	5.50	6.00	7.00	8.50
	mm	-	-	140	153	178	216
B (open)	in	6.02	6.22	7.56	8.94	9.44	10.98
	mm	153	158	192	227	240	279
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	0.51	0.69	0.91	1.12	1.40	1.85
	mm	13	17.5	23.0	28.5	35.5	47.0
Weight	lb	9.9	15.2	21.6	29.7	42.9	61.6
	kg	4.5	6.9	9.8	13.5	19.5	28.0

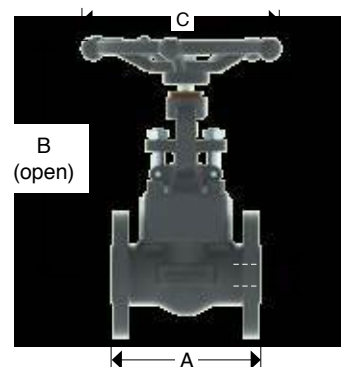


Fig. 5638 Full Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	6.00	7.00	8.00	8.50	9.00	10.50
	mm	152	178	203	216	229	267
A (RJ)	in	6.44	7.50	8.50	9.00	9.50	11.13
	mm	163	191	216	229	242	283
B (open)	in	6.22	6.22	7.56	8.94	9.44	10.98
	mm	158	158	192	227	240	279
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	0.51	0.69	0.91	1.12	1.40	1.85
	mm	13	17.5	23.0	28.5	35.5	47.0
Weight	lb	10.56	16.94	24.2	36.96	46.64	71.72
	kg	4.80	7.70	11.00	16.80	21.20	32.60


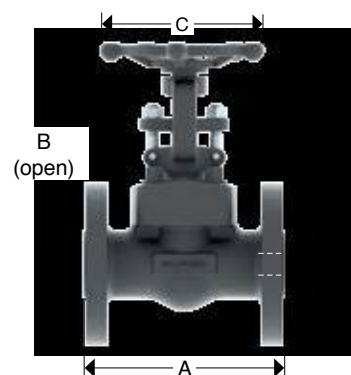


Fig. 5668 Full Port

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	6.50	7.50	8.50	9.00	9.50	11.50
	mm	165	190	216	229	241	292
A (RJ)	in	6.44	7.50	8.50	9.00	9.50	11.63
	mm	163	190	216	229	241	295
B (open)	in	6.22	6.22	7.56	8.94	9.44	10.98
	mm	158	158	192	227	240	279
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	0.51	0.69	0.91	1.12	1.40	1.85
	mm	13	17.5	23.0	28.5	35.5	47.0
Weight	lb	12.32	17.16	27.5	37.4	51.7	85.36
	kg	5.60	7.80	12.50	17.00	23.50	38.80

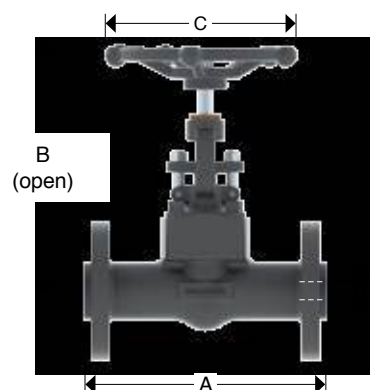

API 602 GLOBE VALVES RF/RTJ, CLASS 1500

Design Characteristics

- API 602 & ASME B16.34
- Bolted Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard or Full Port
- Integral flanged ends (Raised Face or Ring Type Joint)
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	1500 Bolted Bonnet	15615RF 15615RTJ	Flanged Raised Face Flanged Ring Type Joint
Full	1500 Welded Bonnet	15685RF 15685RTJ	Flanged Raised Face Flanged Ring Type Joint


Dimensions and Weights

Fig. 15615 Standard Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	8.50	9.00	10.00	11.00	12.00	14.50
	mm	216	229	254	279	305	368
A (RJ)	in	8.50	9.00	10.00	11.00	12.00	14.625
	mm	216	229	254	279	305	371
B (open)	in	7.36	7.36	8.94	9.53	10.94	12.80
	mm	187	187	227	242	278	325
C	in	4.92	4.92	6.30	6.30	7.09	7.87
	mm	125	125	160	160	180	200
D	in	0.39	0.51	0.69	0.91	1.12	1.38
	mm	10.0	13.0	17.5	23.0	28.5	35.0
Weight	lb	24.2	29.04	38.28	41.8	53.9	68.2
	kg	11.0	13.2	17.4	19.0	24.5	31.0

Fig. 15685 Full Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A (RF)	in	8.50	9.00	10.00	11.00	12.00	14.50
	mm	216	229	254	279	305	368
A (RJ)	in	8.50	9.00	10.00	11.00	12.00	14.625
	mm	216	229	254	279	305	371
B (open)	in	7.36	8.94	9.53	10.94	12.80	13.78
	mm	187	227	242	278	325	350
C	in	4.92	6.30	6.30	7.09	7.87	8.66
	mm	125	160	160	180	200	220
D	in	0.51	0.69	0.91	1.12	1.38	1.57
	mm	13.0	17.5	23.0	28.5	35.0	40.0
Weight	lb	29.04	38.28	41.8	53.9	68.2	79.2
	kg	13.2	17.4	19.0	24.5	31.0	36.0

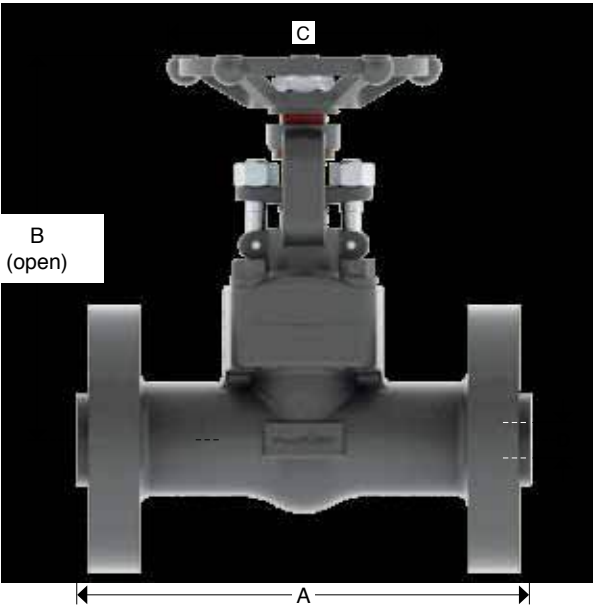

API 602 “Y” PATTERN GLOBE VALVES SW, CLASS 800

Design Characteristics

- API 602 & ASME B16.34
- Bolted or Welded Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard or Full Port
- Threaded, Socket Weld or Threaded x Socket Weld
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	800 Bolted Bonnet	5520YS	Threaded
		5520YSW	Socket Weld
		5520YSSW	Threaded X Socket Weld
Full	800 Bolted Bonnet	5528YS	Threaded
		5528YSW	Socket Weld
		5528YSSW	Threaded X Socket Weld
Standard	800 Welded Bonnet	5527YS	Threaded
		5527YSW	Socket Weld
		5527YSSW	Threaded X Socket Weld
Full	800 Welded Bonnet	5529YS	Threaded
		5529YSW	Socket Weld
		5529YSSW	Threaded X Socket Weld

Dimensions and Weights

Fig. 5520Y Standard Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.17	4.17	4.72	5.98	5.98	7.09
	mm	106	106	120	152	152	180
B (open)	in	6.69	6.69	7.95	9.80	9.80	11.06
	mm	170	170	202	249	249	281
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	0.39	0.51	0.69	0.91	1.12	1.38
	mm	10.0	13.0	17.5	23.0	28.5	35.0
E	in	1.61	1.61	1.97	2.52	2.52	3.15
	mm	41	41	50	64	64	80
Weight	lb	4.4	4.84	8.36	12.1	15.4	25.3
	kg	2.0	2.2	3.8	5.5	7.0	11.5

Fig. 5527Y Standard Port, Welded Bonnet



Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.17	4.17	4.72	5.98	5.98	7.09
	mm	106	106	120	152	152	180
B (open)	in	6.54	6.54	7.76	9.57	9.57	10.71
	mm	166	166	197	243	243	272
C	in	3.94	3.94	4.92	6.30	6.30	7.09
	mm	100	100	125	160	160	180
D	in	0.39	0.51	0.69	0.91	1.12	1.38
	mm	10	13.0	17.5	23.0	28.5	35.0
E	in	1.61	1.61	1.97	2.52	2.52	3.15
	mm	41	41	50	64	64	80
Weight	lb	4.4	4.84	8.36	12.1	15.4	25.3
	kg	2.0	2.2	3.8	5.5	7.0	11.5

Fig. 5528Y Full Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.17	4.72	5.98	5.98	7.09	7.87
	mm	106	120	152	152	180	200
B (open)	in	6.69	7.95	9.80	9.80	11.06	11.81
	mm	170	202	249	249	281	300
C	in	3.94	4.92	6.30	6.30	7.09	7.87
	mm	100	125	160	160	180	200
D	in	0.51	0.69	0.91	1.12	1.38	1.57
	mm	13.0	17.5	23.0	28.5	35.0	40.0
E	in	1.61	1.97	2.52	2.52	3.15	3.54
	mm	41	50	64	64	80	90
Weight	lb	4.84	8.36	12.1	15.4	25.3	30.8
	kg	2.2	3.8	5.5	7.0	11.5	14.0

Fig. 5529Y Full Port, Welded Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.17	4.72	5.98	5.98	7.09	7.87
	mm	106	120	152	152	180	200
B (open)	in	6.54	7.76	9.57	9.57	10.71	11.42
	mm	166	197	243	243	272	290
C	in	3.94	4.92	6.30	6.30	7.09	7.87
	mm	100	125	160	160	180	200
D	in	0.51	0.69	0.91	1.12	1.38	1.57
	mm	13.0	17.5	23.0	28.5	35.0	40.0
E	in	1.61	1.97	2.52	2.52	3.15	3.54
	mm	41	50	64	64	80	90
Weight	lb	4.84	8.36	12.1	15.4	25.3	30.8
	kg	2.2	3.8	5.5	7.0	11.5	14.0

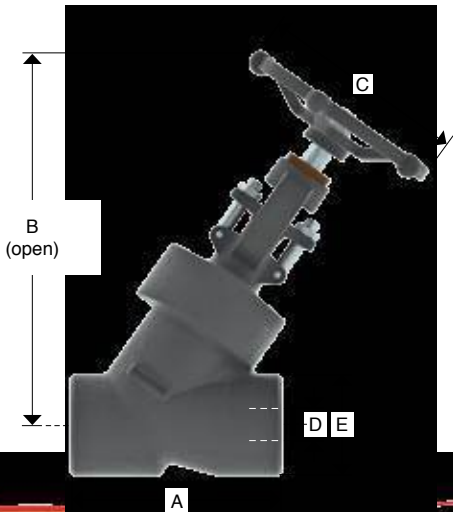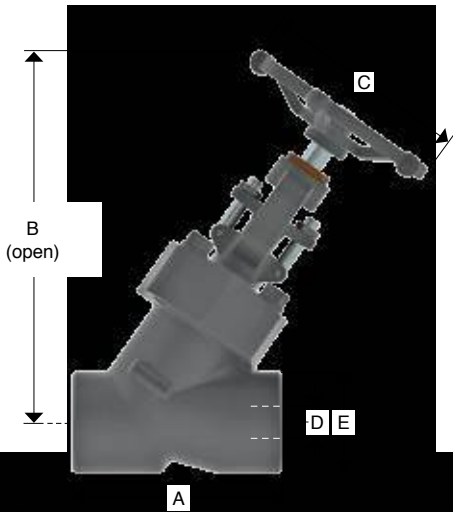

API 602 “Y” PATTERN GLOBE VALVES SW, CLASS 1500

Design Characteristics

- API 602 & ASME B16.34
- Bolted or Welded Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard or Full Port
- Threaded, Socket Weld or Threaded x Socket Weld
- Spiral Wound Gasket
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	1500 Bolted Bonnet	5521YS 5521YYSW 5521YSSW	Threaded Socket Weld Threaded X Socket Weldr
Full	1500 Bolted Bonnet	5538YS 5538YSW 5538YSSW	Threaded Socket Weld Threaded X Socket Weldr
Standard	1500 Welded Bonnet	5537YS 5537YYSW 5537YSSW	Threaded Socket Weld Threaded X Socket Weldr
Full	1500 Welded Bonnet	5539YS 5539YYSW 5539YSSW	Threaded Socket Weld Threaded X Socket Weldr

Dimensions and Weights

Fig. 5521Y Standard Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.72	4.72	5.98	5.98	7.09	7.87
	mm	120	120	152	152	180	200
B (open)	in	7.87	7.87	9.84	9.84	11.14	12.76
	mm	200	200	250	250	283	324
C	in	4.92	4.92	6.30	6.30	7.09	7.87
	mm	125	125	160	160	180	200
D	in	0.39	0.51	0.69	0.91	1.12	1.38
	mm	10.0	13.0	17.5	23.0	28.5	35.0
E	in	1.97	1.97	2.52	2.52	3.15	3.54
	mm	50	50	64	64	80	90.0
Weight	lb	4.4	4.84	8.36	12.1	15.4	25.3
	kg	2.0	2.2	3.8	5.5	7.0	11.5

Fig. 5537Y Standard Port, Welded Bonnet



Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.72	4.72	5.98	5.98	7.09	7.87
	mm	120	120	152	152	180	200
B (open)	in	7.56	7.56	9.45	9.45	10.75	12.44
	mm	192	192	240	240	273	316
C	in	4.92	4.92	6.30	6.30	7.09	7.87
	mm	125	125	160	160	180	200
D	in	0.39	0.51	0.69	0.91	1.12	1.38
	mm	10.0	13.0	17.5	23.0	28.5	35.0
E	in	1.97	1.97	2.52	2.52	3.15	3.54
	mm	50	50	64	64	80	90.0
Weight	lb	4.4	4.84	8.36	12.1	15.4	25.3
	kg	2.0	2.2	3.8	5.5	7.0	11.5

Fig. 5538Y Full Port, Bolted Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.72	5.98	5.98	7.09	7.87	8.66
	mm	120	152	152	180	200	220
B (open)	in	7.87	9.84	9.84	11.1	12.7	12.9
	mm	200	250	250	283	324	330
C	in	4.9	6.2	6.3	7.04	7.87	8.66
	mm	125	160	160	180	200	220
D	in	0.51	0.69	0.91	1.12	1.38	1.57
	mm	13.0	17.5	23.0	28.5	35.0	40.0
E	in	1.96	2.51	2.52	3.34	3.54	3.93
	mm	50	64	64	80	90	100
Weight	lb	4.84	8.36	12.1	15.4	25.3	30.8
	kg	2.2	3.8	5.5	7.0	11.5	14.0

Fig. 5539Y Full Port, Welded Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	4.72	5.98	5.98	7.09	7.87	8.66
	mm	120	152	152	180	200	220
B (open)	in	7.56	9.45	9.45	10.75	12.44	12.99
	mm	192	240	240	273	316	330
C	in	4.92	6.30	6.30	7.09	7.87	8.66
	mm	125	160	160	180	200	220
D	in	0.51	0.69	0.91	1.12	1.38	1.57
	mm	13.0	17.5	23.0	28.5	35.0	40.0
E	in	1.97	2.52	2.52	3.15	3.54	3.94
	mm	50	64	64	80	90.0	100.0
Weight	lb	4.84	8.36	12.1	15.4	25.3	30.8
	kg	2.2	3.8	5.5	7.0	11.5	14.0

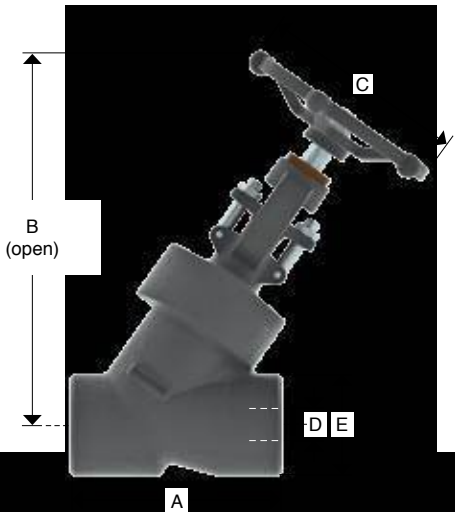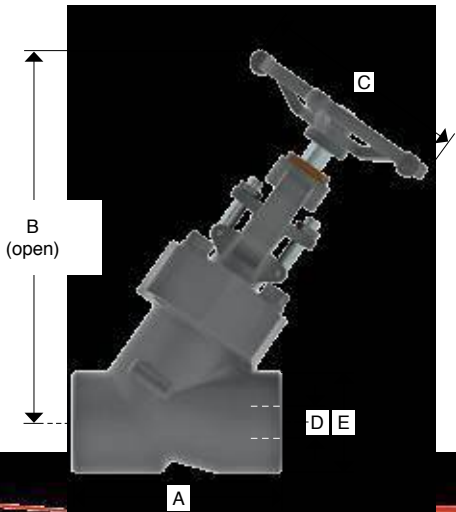

API 602 “Y” PATTERN GLOBE VALVES SW, CLASS 2500

Design Characteristics

- API 602 & ASME B16.34
- Bolted or Welded Bonnet
- Tapered loose disc
- Stem with ACME Threaded (OS&Y)
- Bolted Gland Bushing
- Standard or Full Port
- Threaded, Socket Weld or Threaded x Socket Weld
- Integral Seat Ring

PORT	CLASS	CATALOG FIGURE No.	ENDS TYPES
Standard	2500	5522YS	Threaded
	Welded	5522YSW	Socket Weld
	Bonnet	5522YSSW	Threaded X Socket Weld
Full	2500	5622YS	Threaded
	Welded	5622YSW	Socket Weld
	Bonnet	5622YSSW	Threaded X Socket Weld

Dimensions and Weights

Fig. 5522Y Standard Port, Welded Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	5.98	5.98	7.09	7.87	7.87	9.06
	mm	152	152	180	200	200	230
B (open)	in	9.57	9.57	11.42	13.19	13.19	15.35
	mm	243	243	290	335	335	390
C	in	6.30	6.30	7.87	9.84	9.84	11.81
	mm	160	160	200	250	250	300
D	in	0.43	0.55	0.75	0.98	1.10	1.38
	mm	11.0	14.0	19.0	25.0	28.0	35.0
E	in	2.52	2.52	3.15	3.54	3.54	3.82
	mm	64	64	80	90	90	97.0
Weight	lb	4.4	4.84	8.36	12.1	15.4	25.3
	kg	2.0	2.2	3.8	5.5	7.0	11.5

Fig. 5622Y Full Port, Welded Bonnet

Sizes	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	mm	13	19	25	32	38	51
A	in	5.98	7.09	7.87	7.87	9.06	PCR
	mm	152	180	200	200	230	
B (open)	in	9.57	11.42	13.19	13.19	15.35	PCR
	mm	243	290	335	335	390	
C	in	6.30	7.87	9.84	9.84	11.81	PCR
	mm	160	200	250	250	300	
D	in	0.55	0.75	0.98	1.10	1.38	PCR
	mm	14.0	19.0	25.0	28.0	35.0	
E	in	2.52	3.15	3.54	3.54	3.82	PCR
	mm	64	80	90	90	97.0	
Weight	lb	4.84	8.36	12.1	15.4	25.3	PCR
	kg	2.2	3.8	5.5	7.0	11.5	

