

LINED BALL VALVE


Design Feature:-

- Ø Interior valve bodies as well as the stem and ball are individually lined with PFA or PVDF/FEP
- Ø Ball is fully encapsulated in PFA/FEP. Ceramic Balls are also available which are interchangeable
- Ø Anti-blow out stem assembly for preventing stem blow out even when top gear is disassembled
- Ø Short pattern face to face dimension in accordance with ANSI B16.10 and ANSI B 16.5, 150 lbs.(flange dimension) - facilitating replacement of fully lined or sleeved plug valves with Horizon lined ball valves without altering existing pipework
- Ø Valves supplied with anti-static devices for protection against potentially dangerous electrostatic discharge
- Ø Free floating Ball Valve Principle ensures the ball seals against the downstream seat ring giving a positive sealing force even when line pressure is low
- Ø All inherent design features of a conventional ball valve such as low torque, quarter-turn operation, bubble tight shut off and a minimum pressure drop



Technical Specifications

Sizes	DN 15 to DN 350 (NPS ½" to NPS 12")
Material of Construction	Ductile Cast Iron A-395, Astm A 216 Gr. WCB, CF8, CF8M etc
Design & Manufacturing Standard	BS EN 17292
Face to Face Std	ASME B16.10
Shell Design	ANSI B 16.34
Flange Connection rating	ASME B16.5, 150# / DIN PN-10 / JIS
Testing Standard	API 598 / BS EN 12266-1
Type of Bore	Standard (Full Bore) Reduced Bore
End Connection Type	Flanged Ends, RF
Operated Type	Hand Wheel, Gear Box, Electric Actuator, Bare Shaft, etc.
Spark test	15 kv DC

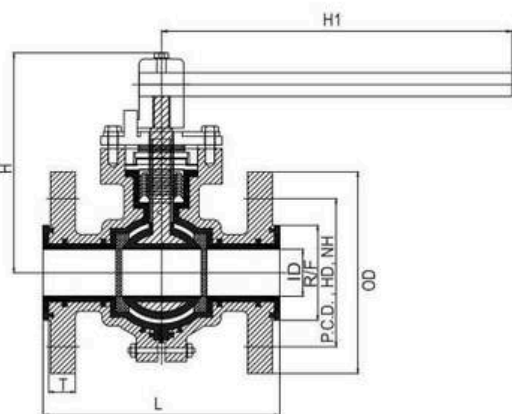

TESTING STANDARDS

Test Performed	API 598	API 598
SIZES	½" to 4"	6" to 12"
HYDRO-SHELL TEST	420 PSI	225 PSI
HYDRO- SEAT TEST	270 PSI	165 PSI
PNEUMATIC SEAT TEST	105 PSI	75 PSI