

StaySafe™ Manway Hold-Down Screen

Applications


- Processes with Down-Flow reactors with pyrophoric and potentially volatile environments.
- Methinator vessels.
- SynGas Vessels.
- Drying vessels.
- Any new or existing process vessel that needs an efficient hold-down screen where media needs to be changed.

Benefits

- Reduces the need to enter the confined space of vessels.
- Helps maintain compliance with corporate directives and OSHA guidelines that do not allow entry into a vessel.
- Facilitates faster media bed turnaround time, which lowers operation costs and increases uptime.
- No additional pressure drop for consistent performance vs. standard screens.
- Keeps workers safe by not requiring entry into the potential hazardous, confined space of a vessel.

Features


- No-Entry Extraction™ of manway to access media bed.
- Extraction hooks are provided for safe and secure removal of the manway panel from outside the vessel.
- The screen remains bolted in the vessel while the manway is removed. This facilitates the ability to replace the manway without entry.
- Unique center locking hub design is released with a single tool and panel capture loops allow easy removal.
- User-friendly, simplified design reduces assembly time.
- Ceramic-rope manway seal is incorporated into the screen assembly.
- Reusable seal is incorporated in the screen, held firmly in place, resulting in the seal requiring less frequent replacement.

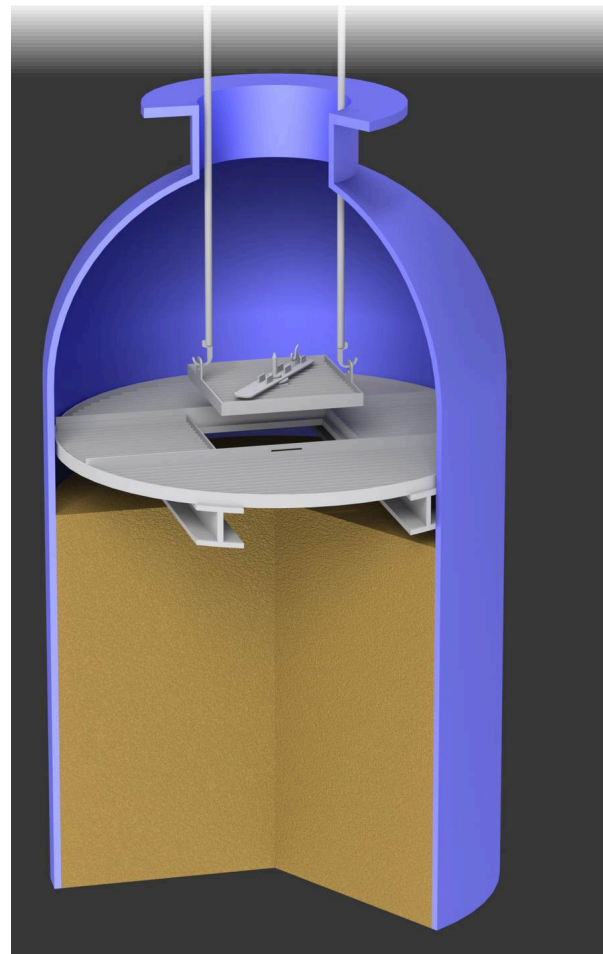

Keep Workers Safe and Outside the Vessel During Screen Removal


Step 1: Initial Position

- Manway Panel is in locked position within the screen structure.
- Latch bar is in the locked position.

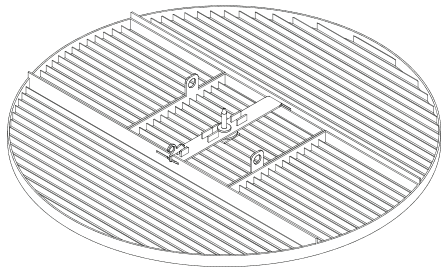


Step 2: Turn Locking Latch 45 Degrees

- Use provided tool to unlock and rotate the locking bar to release manway.

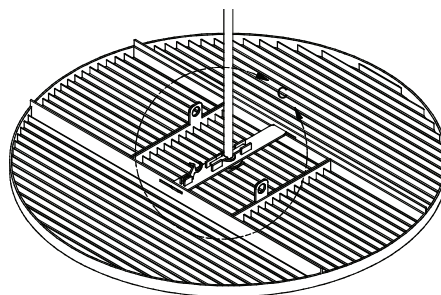

Step 3: Remove Manway Panel

- With the manway panel unlocked the manway panel can be lifted from the vessel by the two capture loops.

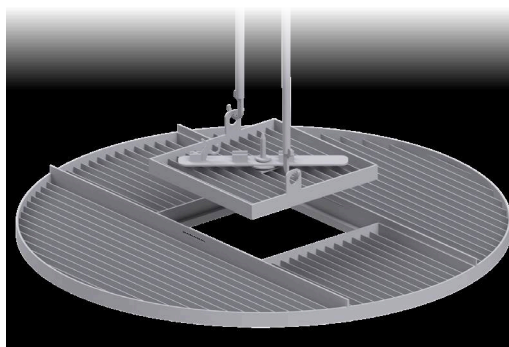

Innovative Manway Hold-Down Screen Reduces Confined Space Entry and Improves Turnaround Efficiency and Safety

The uniquely designed StaySafe™ Manway Screen keeps workers safe by not requiring entry into a potentially hazardous, confined space to remove the manway. No other competitor has a product that can be removed and replaced without entry, which is critical not only for the safety of workers, but also for companies to stay compliant with OSHA regulation 1910.146 'Permit, No-Permit Confined Space Entry'; and API Z117.1 and NFPA350 'Safe Confined Space Entry' requirements without entering vessels.

The ease-of-use to extract the manway component of the screen in less time than current designs without disturbing the media lowers operation costs, increases uptime, and optimizes vessel performance. Get the most out of your vessels with the StaySafe™ Manway Screen by Johnson Screens.

Johnson Screens Energy Processing Technology

North and South America
Phone +1 651 636 3900
info.us@johnsonscreens.com

Europe, Middle East & Africa
Phone +31 3 23 75 05 42
info.fr@johnsonscreens.com

Asia Pacific
Phone +61 7 3867 5555
info.au@johnsonscreens.com

johnsonscreens.com

© 2025 Johnson Screens Inc. All rights reserved. Johnson Screens Inc. assumes no liability for possible catalogues, brochures and other printed material errors. The technical data in this brochure is subject to change and for illustrative purposes only and should not be applied as published to your individual case. Johnson Screens reserves the right to alter its products without notice. Any reproduction, distribution, display or use of this information in whole or in part without the written authorization of Johnson Screens is strictly prohibited.

24-EPT-0018-v2-4-Eng