


LINED BALL VALVES




VALVE SOLUTION
for Corrosive Applications

PFA LINED BALL VALVE
SIDE SPLIT - FULL PORT LEVER OPERATED - ANSI

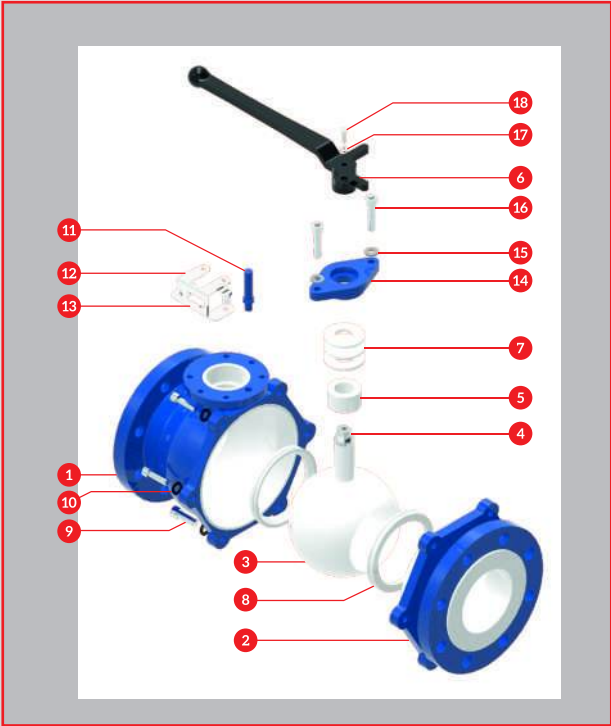

PART NO.	DESCRIPTION	MATERIAL OF CONSTRUCTION	QTY.
1	Body	ASTM A 216 GR. WCB + PFA LINED	1
2	Side Piece	ASTM A 216 GR. WCB + PFA LINED	1
3	Ball	CF8 INSTERTED PFA LINED	1
4	Stem Integral To Ball	CF8 + PFA LINED	1
5	Bush	PTFE	1
6	Handle	CS EPOXY PAINTED	1
7	Chevron	PTFE	3-6
8	Seat	PTFE	2
9	Allen Bolt For Body	ASTMA A 193 GR.B7	4-8
10	Allen Bolt Washer	STEEL	4-8
11	Stopper Pin	MILD STEEL	1
12	LOTO Clamp Bolts	SS 304	2
13	LOTO Clamo	SS 304	1
14	Gland Cover	ASTM A 351 GR. CF8	1
15	Plain Washer For Gland Cover	SS 304	2
16	Allen Bolt for Gland Cover	SS 304	2
17	Plain Washer For Handle	SS 304	1
18	Hex Bolt For Handle	SS 304	1

SECTIONAL VIEW

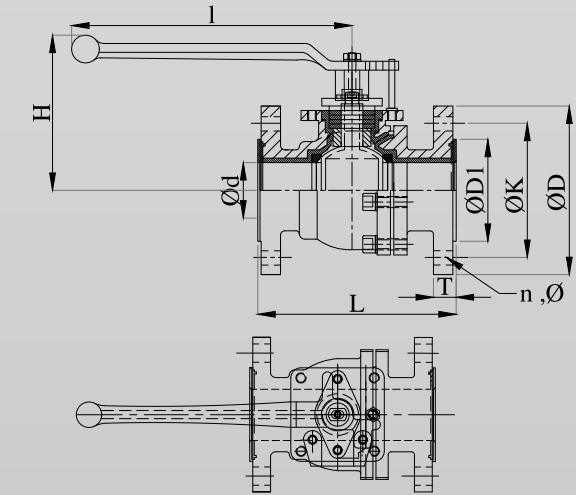

DIMENSIONS

SIZE	Ød ± 0.04		L ± 0.12		ØD ± 0.04		ØD1 ± 0.04		T+0.11/-0.00		H (Approx)		ØK ± 0.062		n	Ø ± 0.02		I ± 0.08	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM		INCH	MM	INCH	MM
0.5"	0.511	13	5.118	130	3.503	89	1.377	35	0.551	14	4.409	112	2.362	60	04	0.629	16	7.007	178
0.75	0.787	20	5.905	150	3.858	98	1.692	43	0.551	14	4.763	121	2.755	70	04	0.629	16	7.007	178
1"	0.987	25	5.000	127	4.251	108	2.007	51	0.669	17	4.763	121	3.110	79	04	0.629	16	7.007	178
1.5"	1.574	40	6.496	165	5.000	127	2.874	73	0.748	19	5.354	136	3.858	98	04	0.629	16	10.000	254
2"	1.968	50	7.007	178	5.984	152	3.622	92	0.807	20.5	5.472	139	4.763	12	04	0.748	19	10.000	254
2.5"	2.559	65	7.480	190	7.007	178	4.133	105	0.885	23	6.692	168	5.511	140	04	0.748	19	12.007	305
3"	2.952	75	7.992	203	7.519	191	5.00	127	0.984	25	6.968	177	5.984	152	04	0.748	19	12.007	305
4"	3.937	100	9.015	229	9.015	229	6.181	157	0.984	25	8.110	206	7.519	191	08	0.748	19	12.007	305


GEAR OPERATED

SIZE	Ød ± 0.04		L ± 0.12		ØD ± 0.04		ØD1 ± 0.04		T+0.11/-0.00		H (Approx)		ØK ± 0.062		n	Ø ± 0.02	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM		INCH	MM
6"	5.905	150	10.511	267	11.023	280	8.503	216	1.102	28	16.141	410	9.488	241	08	0.866	22

All Dimensions are in Inches & mm unless otherwise specified. Tolerances are given in Inches.
• End to End Dimensions are as per DIN EN 558 - 1
* Gear Operated




PFA LINED BALL VALVE
SIDE SPLIT - FULL PORT LEVER OPERATED - DIN

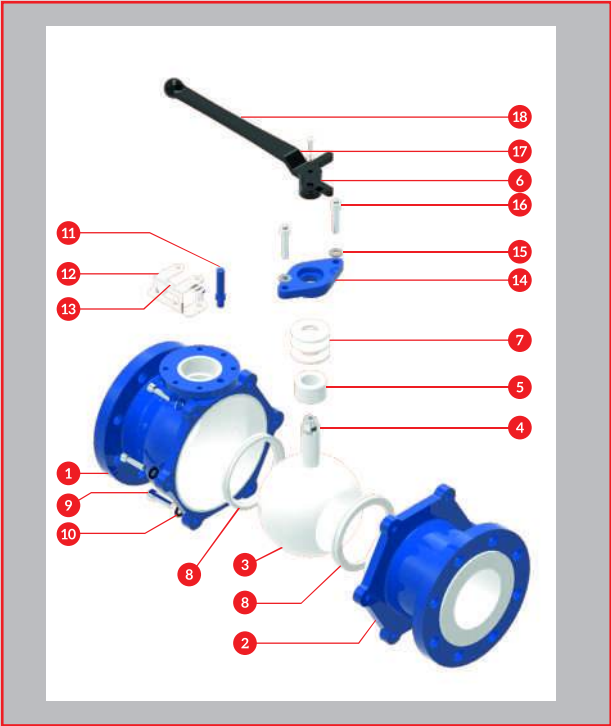

PART NO.	DESCRIPTION	MATERIAL OF CONSTRUCTION	QTY.
1	Body	ASTM A 216 GR. WCB + PFA LINED	1
2	Side Piece	ASTM A 216 GR. WCB + PFA LINED	1
3	Ball	CF8 INSTERTED PFA LINED	1
4	Stem Integral To Ball	CF8 + PFA LINED	1
5	Bush	PTFE	1
6	Handle	CS EPOXY PAINTED	1
7	Chevron	PTFE	3-6
8	Seat	PTFE	2
9	Allen Bolt For Body	ASTMA A 193 GR.B7	4-8
10	Allen Bolt Spring Washer	HT STEEL	4-8
11	Stopper Pin	STEEL	1
12	LOTO Clamp Bolts	SS 304	2
13	1070 Clamp	SS 304	1
14	Gland Cover	ASTM A 351 GR. CF8	1
15	Spring Washer For Gland Cover	B7 / \$S 304 / SS 316 2	-
16	Allen Bolt for Gland Cover	B7 /\$S 304 /\$S 316 2	-
17	Plain Washer For Handle	SS 304	1
18	Hex Bolt For Handle	SS 304	1

SECTIONAL VIEW

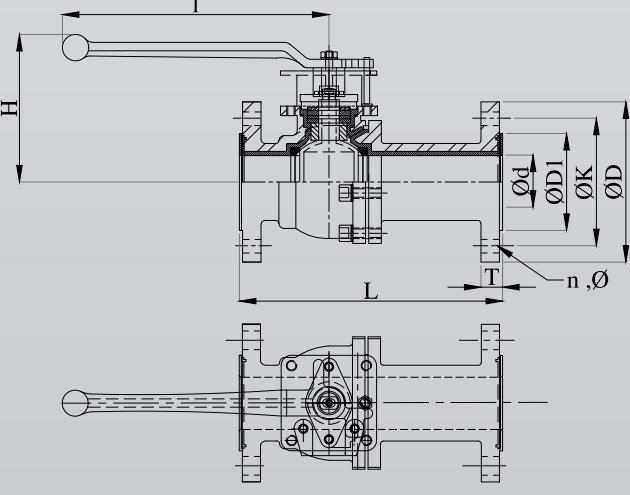

DIMENSIONS

SIZE	Ød ± 0.04		L ± 0.12		ØD ± 0.04		ØD1 ± 0.04		T+0.11/-0.00		H (Approx)		ØK ± 0.062		n	Ø ± 0.02		I ± 0.08	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM		INCH	MM	INCH	MM
0.5"	0.511	13	5.118	130	3.740	95	1.377	35	0.551	14	4.409	112	2.559	65	04	0.551	14	7.007	178
0.75	0.787	20	5.905	150	4.133	105	1.692	43	0.551	14	4.763	121	2.952	75	04	0.551	14	7.00	178
1"	0.9841	25	6.299	160	4.527	115	2.007	51	0.669	17	4.763	121	3.346	85	04	0.551	14	7.007	178
1.5"	1.574	40	7.874	200	5.905	150	2.874	73	0.748	19	5.354	136	4.330	110	04	0.708	18	10.000	254
2"	1.968	50	9.055	230	6.496	165	3.622	92	0.807	20.5	5.472	139	4.921	125	04	0.708	18	10.000	254
2.5"	2.559	65	11.417	290	7.283	185	4.133	105	0.885	22.5	6.692	170	5.708	145	04	0.708	18	12.007	305
3"	2.952	75	12.204	310	7.874	200	5.00	127	0.984	25	6.968	177	6.299	160	08	0.708	18	12.007	305
4"	3.937	100	13.779	350	8.661	220	6.181	157	0.984	25	8.110	206	7.086	180	08	0.708	18	12.007	305


GEAR OPERATED

SIZE	Ød ± 0.04		L ± 0.12		ØD ± 0.04		ØD1 ± 0.04		T+0.11/-0.00		H (Approx)		ØK ± 0.062		n	Ø ± 0.02	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM		INCH	MM
6"	5.905	150	10.511	267	11.023	280	8.503	216	1.102	28	16.141	410	9.488	241	08	0.866	22

All Dimensions are in Inches & mm unless otherwise specified. Tolerances are given in Inches.
• End to End Dimensions are as per DIN EN 558 - 1
* Gear Operated




PFA LINED BALL VALVE
CENTRAL SPLIT - FULL PORT LEVER OPERATED

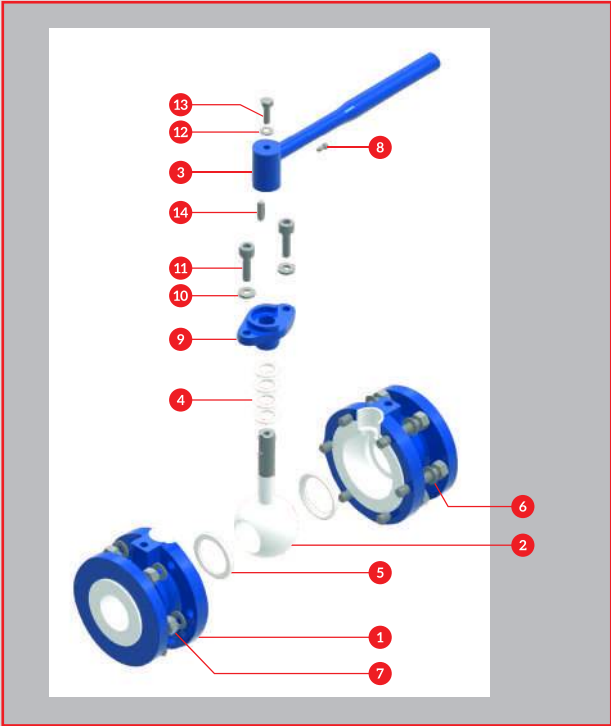

PART NO.	DESCRIPTION	MATERIAL OF CONSTRUCTION	QTY.
1	Body	ASTM A 216 GR. WCB + PFA LINED	2
2	Ball With Integral Stem	CF8 INSERTED PFA LINED	1
3	Handle	CS EPOXY PAINTED	1
4	Chevron	PTFE	4-6
5	Seat	PTFE	2
6	Studs	ASTM A 193 GR. B7	4-10
7	Nuts	ASTM A 193 GR. 2H	8-20
8	Stopper Pin	ALEN BOLT HT 10.9	1
9	Gland Cover	ASTMA 216 GR. WCB	1
10	Plain Washer For Gland Cover	MS GALVANISED	2
11	Allen Bolt for Gland Cover	HT GRADE 10.9	2
12	Plain Washer for Handle	STEEL GALVANIZED	1
13	Hex Bolt For Handle	HT10.9	1
14	Key For Handle	HT STEEL	1

SECTIONAL VIEW

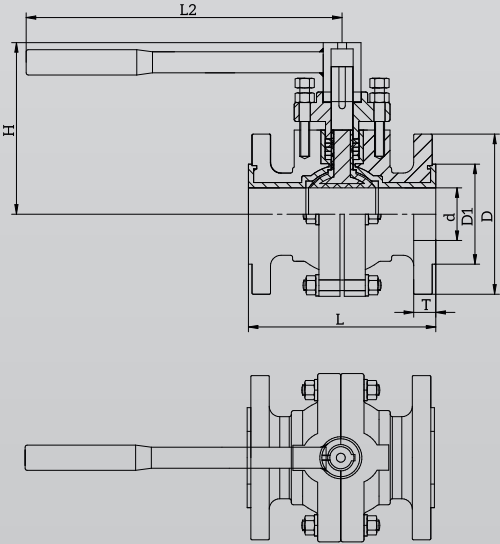


DIMENSIONS

SIZE	L ± .12		d ± .04		D ± 0.04		D1 ± 0.08		L2 ± 0.11		H (Approx)		T+0.11/-0.00		PCD ± 0.062		n	Ø ± 0.02	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM		INCH	MM
0.5"	4.25	108	0.51	13	3.50	89	1.38	35	7.87	200	4.33	110	0.55	14	2.36	60	04	5/8	16
0.75"	4.65	118	0.75	19	3.85	98	1.69	43	7.87	200	4.92	125	0.55	14	2.75	70	04	5/8	16
1"	5.00	127	0.94	25	4.25	108	2.00	51	7.87	200	4.92	125	0.63	16	3.10	79	04	5/8	16
1.5"	6.49	165	1.57	40	5.00	127	2.87	73	9.84	250	5.31	135	0.74	19	3.85	98	04	5/8	16
2"	7.00	178	1.96	50	5.98	152	3.62	92	12.20	310	6.30	160	0.80	20.50	4.76	121	04	3/4	19
2.5"	7.48	190	2.55	65	7.00	178	4.13	105	12.79	325	6.49	165	0.90	23	5.51	140	04	3/4	19
3"	7.99	203	2.95	75	7.51	191	5.00	127	12.79	350	6.89	175	0.98	25	5.98	152	04	3/4	19
4"	9.00	229	3.93	100	9.00	229	6.18	157	13.77	350	7.87	200	0.98	25	7.51	191	08	3/4	19
6"	10.50	267	5.90	150	11.00	280	8.50	216	19.68	500	12.20	310	1.10	28	9.48	241	08	7/8	22


All Dimensions are in Inches & mm unless otherwise specified. Tolerances are given in Inches.

PFA LINED BALL VALVE
CENTRAL SPLIT - FULL PORT GEAR OPERATED

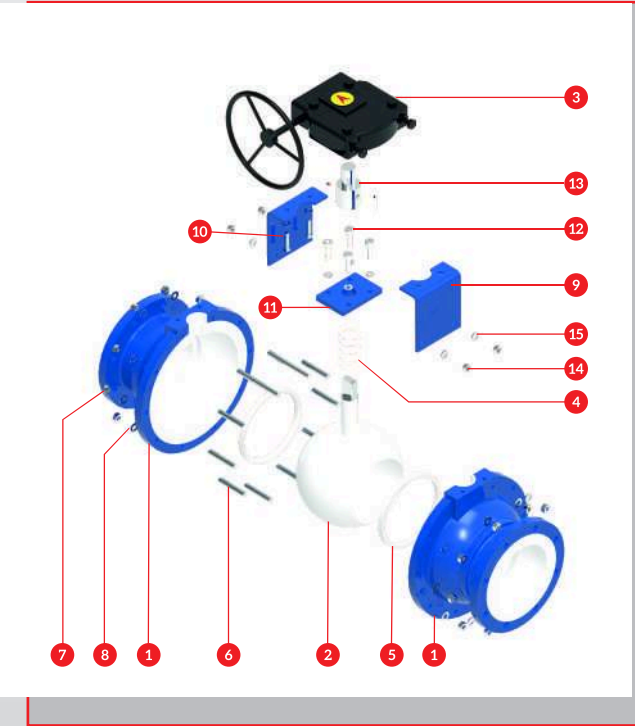

PART NO.	DESCRIPTION	MATERIAL OF CONSTRUCTION	QTY.
1	Body	ASTM A 216 GR. WCB + PFA LINED	2
2	Ball With Integral Stem	CF8 INSERTED PFA LINED	1
3	Gear Box	CAST IRON EPOXY PAINTED	1
4	Chevron	PTFE	5
5	Seat	PTFE	2
6	Studs	ASTM A 193 GR. B7	12-16
7	Nuts	ASTM A 193 GR. 2H	24-32
8	Washers For Studs	STEEL	24-32
9	Gear Box Mounting Clamps	MS GALVANIZED / SS	2
10	Gear Box Clamp Allen Bolts	HT 10.9	4
11	Gland Cover	ASTM A 216 GR.WCB	1
12	Allen Bolt For Glad Cover	HT 10.9	4
13	Coupler Spindle / Gearbox	SS 304	1
14	Clamp Mounting Nuts	HT	4
15	Clamp Mounting Washers	HT	4

SECTIONAL VIEW

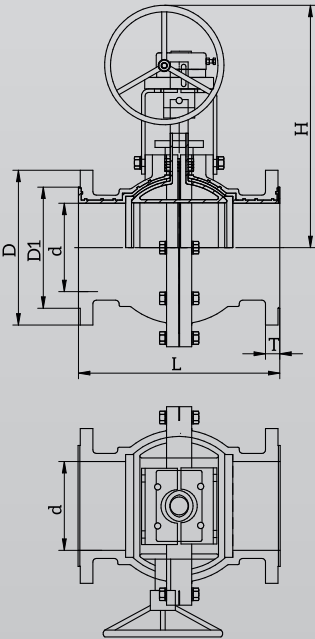

DIMENSIONS


SIZE	L ± .12		d ± .04		D ± 0.04		D1 ± 0.08		H (Approx)		T+0.11/-0.00		PCD ± 0.062		n	Ø ± 0.02	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM		INCH	MM
8"	17.99	457	7.87	200	13.50	343	10.62	270	22.63	575	1.18	30	11.73	298	08	7/8	22
10"	20.98	533	9.84	250	15.98	406	12.75	324	24.60	625	1.29	33	14.25	362	12	1	25
12"	24.01	610	11.81	300	19.09	485	15.00	381	27.95	710	1.37	35	17.00	432	12	1	25

All Dimensions are in Inches & mm unless otherwise specified. Tolerances are given in Inches.

PFA LINED BALL VALVE
SIDE SPLIT - REDUCE PORT LEVER OPERATED



SECTIONAL VIEW

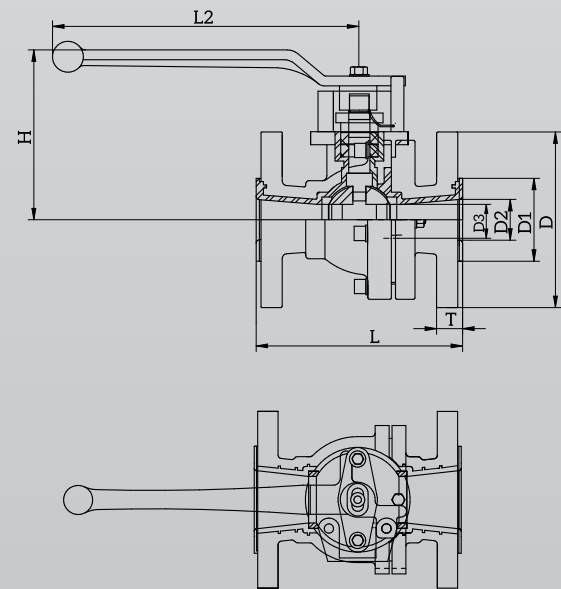

PART NO.	DESCRIPTION	MATERIAL OF CONSTRUCTION	QTY.
1	Body	ASTM A 216 GR. WCB + PFA LINED	1
2	Side Piece	ASTM A 216 GR. WCB + PFA LINED	1
3	Ball	CF8 INSERTED PFA LINED	1
4	Spindle	CF8 INSERTED PFA LINED	1
5	Handle	CS EPOXY PAINTED	1
6	Chevron	PTFE	4-5
7	Seat	PTFE	2
8	Allen Bolt For Body	ASTM A 193 GR. B7	4
9	Plain Washer	HT STEEL	4
10	Locking Clamp	SS 304	1
11	Hex Bolt For Locking Clamp	SS 304	2
12	Stopper Pin	STEEL	1
13	Gland Cover	ASTM A 351 GR. CF8	1
14	Plain Washer for Gland Cover	SS 304	2
15	Allen Bolt for Gland Cover	SS 304	2
16	Hex Bolt For Handle	SS 304	1

DIMENSIONS

SIZE	L ± 0.12		D2 ± 0.04		D1 ± 0.08		D ± 0.04		L2 ± 0.11		H (Approx)		T+0.11/-0.00		PCD ± 0.062		n	Ø ± 0.02	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM		INCH	MM
1"	5.00	127	0.94	25	2.00	51	4.25	108	7.00	178	4.76	121	0.67	17	3.10	79	04	5/8	16
1.5"	6.49	165	1.57	40	2.87	73	5.00	127	10.00	254	5.35	136	0.74	18.8	3.85	98	04	5/8	16
2"	7.00	178	1.96	50	3.62	92	5.98	152	10.00	254	5.47	139	0.81	20.5	4.76	121	04	3/4	19
3"	7.99	203	2.95	75	5.00	127	7.51	191	12.00	305	6.96	177	0.98	24.90	5.98	152	04	3/4	19
4"	9.00	229	3.93	100	6.18	157	9.00	229	12.00	305	8.11	206	0.98	24.90	7.51	191	08	3/4	19

All Dimensions are in Inches & mm unless otherwise specified. Tolerances are given in Inches.

BALL VALVE FEATURES

