


PFA LINED BALL CHECK VALVE

PFA LINED BALL CHECK VALVE

Valve features | 밸브 특징

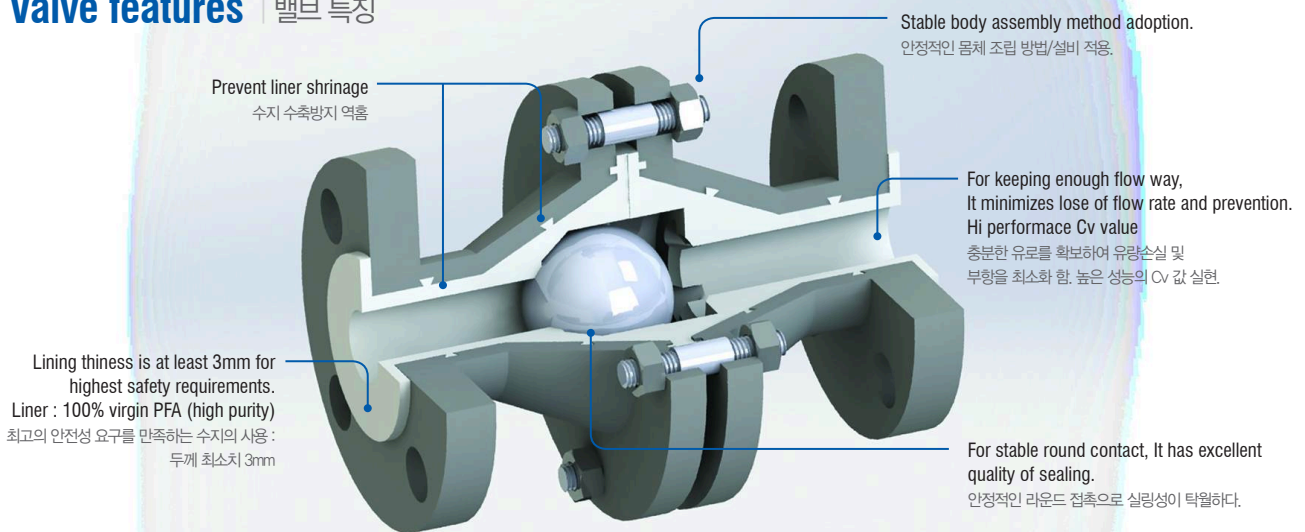


Recommend using condition | 사용 조건

STANDARD DUTY SPEC' 일반 조건


- TEMPERATURE (온도) : UNDER 150° (MAX. 200℃)
- PRESSURE (압력) : UNDER 15Kg/cm²(ANSI 150#)
UNDER 30Kg/cm²(ANSI 300#)

Materials (section view) | 재질 (단면도)

NO	DESCRIPTION	QTY	MATERIAL	
			STAINLESS STEEL (JIS10K)	CARBON STEEL (ANSI 150lbs)
1	Body	1	ASTM A351 CF8 / PFA lined	ASTM A216 WCB / PFA lined
2	Cover	1	ASTM A351 CF8 / PFA lined	ASTM A216 WCB / PFA lined
3	Ball	1	PTFE or RTFE	PTFE or RTFE
4	Stud-Bolt	1set	SUS304	SUS304
5	Hex-Nut	1set	SUS304	SUS304
6	S/Washer	1	SUS304	SUS304
7	Liner	1	PFA	PFA
8	Name plate	1	SUS304	SUS304

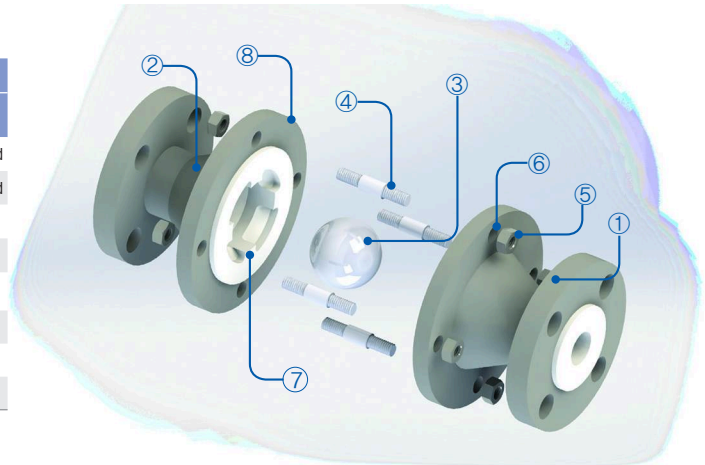

Dimensions & specification table

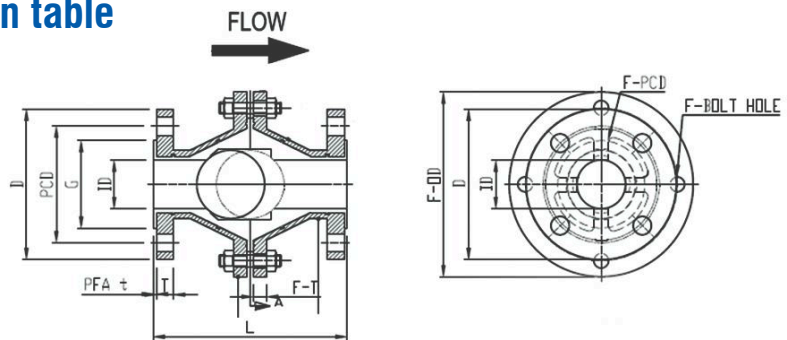

ANSI 150#

unit : mm

SIZE	END FLANGE							CENTER FLANGE GEAR					PFA LINED t	Cv
	L	D	P.C.D	G	ID	F-BOLTHOLE	T	F-OD	F-D	F-PCD	F-BOLTHOLE	F-T		
3/4"	152	98	69.9	43	20	4-Φ16	14	116		96.2	6-Φ10	10	3	12
1"	152	108	79.4	51	25	4-Φ16	14	130		110.2	6-Φ10	10	3	18
1-1/2"	178	125	98.4	73	40	4-Φ16	16	170		145	6-Φ14	12	3	44
2"	203	150	120.7	95	50	4-Φ19	18	190		157	6-Φ14	14	3	115
3"	241	190	152.4	127	80	4-Φ19	22.5	229	206.5	192.9	6-Φ16	19	3.5	265
4"	292	230	190.5	157	100	8-Φ19	22.5	308	294	270	8-Φ16	20	3.5	530

ANSI 300#

unit : mm

SIZE	END FLANGE							CENTER FLANGE GEAR					PFA LINED t	Cv
	L	D	P.C.D	G	ID	F-BOLTHOLE	T	F-OD	F-D	F-PCD	F-BOLTHOLE	F-T		
3/4"	152	115	82.6	43	20	4-Φ19	14.5	116		96.2	6-Φ10	10	3	12
1"	152	125	88.9	51	25	4-Φ19	16	130		110.2	6-Φ10	10	3	18
1-1/2"	178	155	114.3	73	40	4-Φ22	19.5	170		145	6-Φ14	12	3	44
2"	203	165	127	92	50	8-Φ19	21	190		157	6-Φ14	14	3	115
3"	241	210	168.3	127	80	8-Φ22	27.5	229	206.5	192.9	6-Φ16	19	3.5	265
4"	292	255	200	157	100	8-Φ22	30.5	308	294	270	8-Φ16	20	3.5	530

JIS 10K

unit : mm

SIZE	END FLANGE							CENTER FLANGE GEAR					PFA LINED t	Cv
	L	D	P.C.D	G	ID	F-BOLTHOLE	T	F-OD	F-D	F-PCD	F-BOLTHOLE	F-T		
20A	152	100	75	56	20	4-Φ16	14	116		96.2	6-Φ10	10	3	12
25A	152	125	90	67	25	4-Φ16	14	130		110.2	6-Φ10	10	3	18
40A	178	140	105	81	40	4-Φ16	16	170		145	6-Φ14	12	3	44
50A	203	152.4	120	95	50	4-Φ16	18	190		157	6-Φ14	14	3	115
80A	241	185	150	126	80	4-Φ19	25.5	229	206.5	192.9	6-Φ16	19	3.5	265
100A	292	210	175	151	100	8-Φ19	25.5	308	294	270	8-Φ16	20	3.5	530

* Cv = Flow in gallon per minute of 60°F water at 1psi pressure drop. 1psi 압력차에서 60°F의 물이 1분동안 흐른 양

* For other standard such as DIN or larger size than 8", Please contact us separately.

* DIN 규격 제품 및 8"이상의 제품은 별도 문의 바랍니다.


PFA LINED WAFER SWING CHECK VALVE

PFA LINED WAFER SWING CHECK VALVE

Valve features | 밸브 특징

We designed wafer not to have any interaction in piping line. When it assembles with piping or other equipments, It's usefulness is increased.
PPE 라인에 간섭을 받지 않고 사용상 편리성을 고려하여 설계되었다.

Wafer on valve body is prevented from breaking away and increased quality of sealing. : virgin PTFE
WAFER의 이탈을 방지하고 조립시 우수한 SEALING 성능을 실현하기 위한 PTFE SEAL 사용.

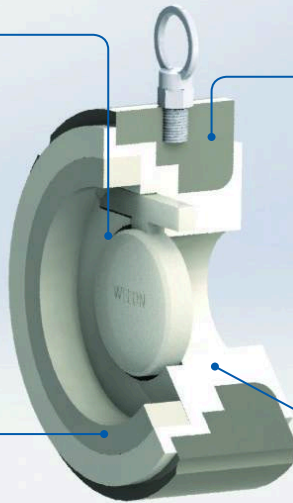

Prevent liner shrinkage
수지 수축 방지 역흡 적용

Lining thickness is at least 3mm for highest safety requirements.
Liner : 100% virgin PFA (high purity)
최고의 안전성 요구를 만족하는 수지의 사용 : 두께 최소치 3mm
고순도 100% PFA 수지를 사용.


Recommend using condition | 사용 조건

STANDARD DUTY SPEC' 일반 조건



- TEMPERATURE (온도) : UNDER 150° (MAX. 200℃)
- PRESSURE (압력) : UNDER 10Kg/cm²

Materials (section view) | 재질 (단면도)

NO	DESCRIPTION	Q'TY	MATERIAL
			CARBON STEEL (ANSI 150lbs)
1	Body	1	ASTM A216 WCB
2	PFA line	1	PFA lined
3	Disc	1	ASTM A331 CF8 / PFA lined
4	Disc-ring(Key Pod)	1set	PTFE
5	I-Bolt/Nut	1set	SUS304

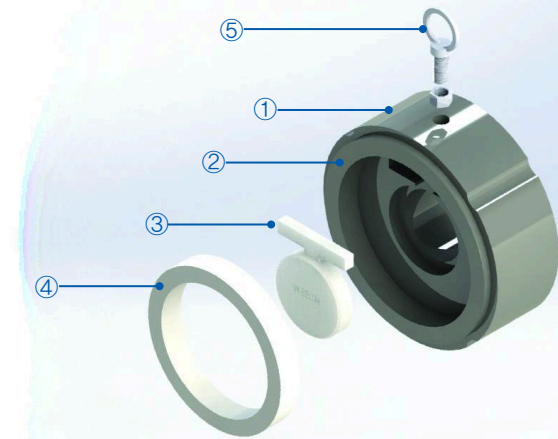

Dimensions & specification table

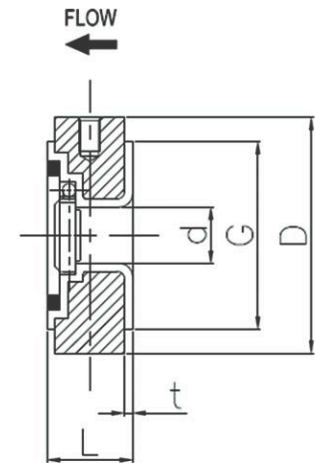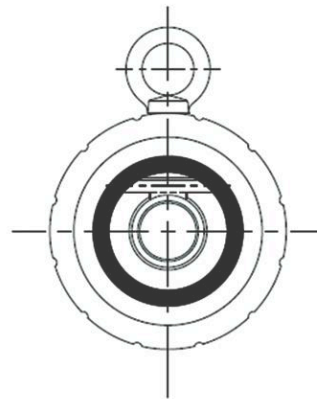

unit : mm

SIZE	WAFER SWING				PFA LINED
	L	d	G	D	t
1-1/2"(40A)	33	22	73	91.5	3.5
2" (50A)	43	30	92.1	112.4	3.5
2-1/2"(65A)	46	55	104.8	131.2	3.5
3"(80A)	46	55	127	143.8	3.5
4"(100A)	52	72	157.2	181.7	3.5
6"(150A)	56	115	215.9	231.1	3.5
8"(200A)	60	155	269.9	288.1	3.5
10"(250A)	68	190	323.8	350.2	4
12"(300A)	78	240	381	419.9	4
14"(350A)	78	275	412.8	462.9	4
16"(400A)	102	305	469.9	526.4	4.5
18"(450A)	114	355	533.4	562.5	4.5
20"(500A)	127	405	584.2	619.6	4.5
24"(600A)	154	450	692.2	732.4	4.5

* Cv = Flow in gallon per minute of 60°F water at 1psi pressure drop. 1psi 압력차에서 60°F의 물이 1분동안 흐른 양

* It can be used by ANSI 150#, JIS 10K, PN10.

* ANSI 150#, JIS 10K 규격 공용사용가능.