




ANSI Class 125 (PN 10)

(Cast Iron Body and Plug) ASTM - A - 126 - Gr.B

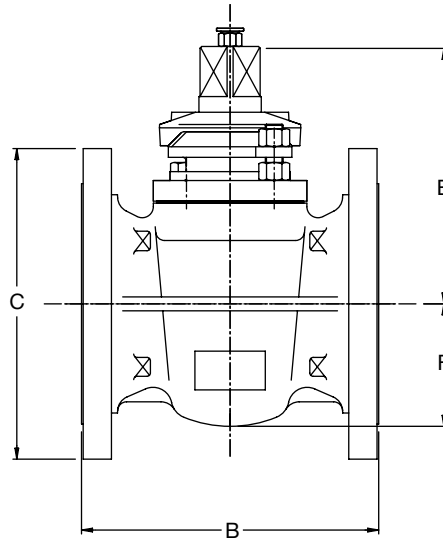


SCC X1R - Short with Wrench

			Short Pattern								
Size	NPS	DN	1 25	1½ 40	2 50	2½ 65	3 80	4 100	5 125	6 150	8 200
FACE TO FACE	B	mm	140	165	178	191	203	229	254	267	292
FLANGE DIAMETER ANSI 125 FF	C	mm	108	127	152	178	191	229	254	279	343
N. TAPPED HOLES UNC THREADED IN FLANGES			-	-	-	-	-	-	2	2	2
CENTER LINE TO TOP OF STEM	E	mm	107	136	152	176	207	230	245	300	330
CENTER LINE TO BOTTOM OF BODY	F	mm	42	62	67	76	100	110	130	160	180
WEIGHT		kg	6	11	13	19	25	38	60	78	100
WRENCH - LENGHT		mm	235	320	320	400	500	570	720	1010	1230



ANSI Class 125 (PN 10)

(Cast Iron Body and Plug) ASTM - A - 126 - Gr.B

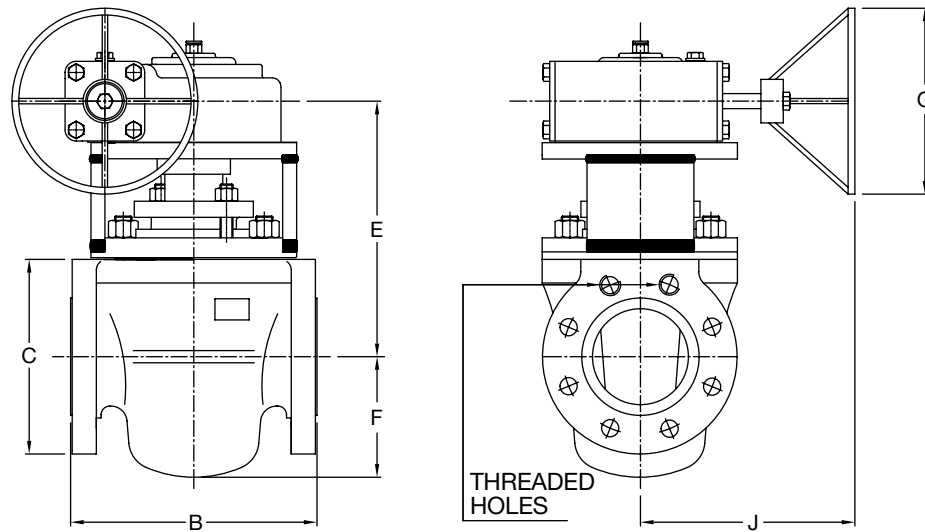


SCR - X1R - Short with Gear

			Short Pattern			
Size		NPS DN	6 150	8 200	10 250	12 300
FACE TO FACE	B	mm	267	292	330	356
FLANGE DIAMETER ANSI 125 FF	C	mm	279	343	406	483
N. TAPPED HOLES UNC THREADED IN FLANGES			2	2	2	4
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	570	600	660	700
CENTER LINE TO BOTTOM OF BODY	F	mm	160	180	220	286
HANDWHEEL DIAMETER	G	mm	560	560	560	560
LONGITUDINAL CENTER LINE TO FACE HANDWHEEL	J	mm	330	330	450	450
WEIGHT		kg	115	140	180	280



ANSI Class 125 (PN 10)

(Cast Iron Body and Plug) ASTM - A - 126 - Gr.B

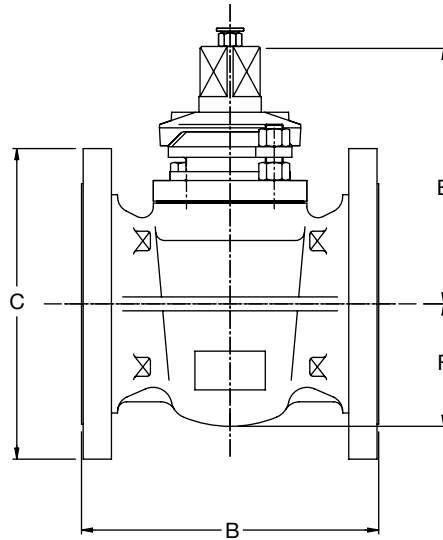


SRC X1R - Regular with Wrench

			Regular Pattern											
Size	NPS	DN	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8
			15	20	25	32	40	50	65	80	100	125	150	200
END TO END THREADED	A	mm	90	95	110	130	135	150	175	200	275	-	-	-
FACE TO FACE	B	mm	110	120	140	150	165	200	220	240	305	356	394	457
FLANGE DIAMETER ANSI 125 FF	C	mm	-	-	108	117	127	152	178	191	229	254	279	343
CENTER LINE TO TOP OF STEM	E	mm	92	115	120	140	152	176	207	230	245	296	330	410
CENTER LINE TO BOTTOM OF BODY	F	mm	35	46	50	60	65	76	93	108	130	155	185	230
WEIGHT THREADED ENDS		kg	1,7	3	4	6	7	12	16	24	41	-	-	-
WEIGHT FLANGED		kg	3	4	6	8	10	14	20	27	40	62	80	110
WRENCH - LENGHT		mm	235	235	235	320	320	400	500	570	720	1010	1010	1230



ANSI Class 125 (PN 10)

(Cast Iron Body and Plug) ASTM - A - 126 - Gr.B

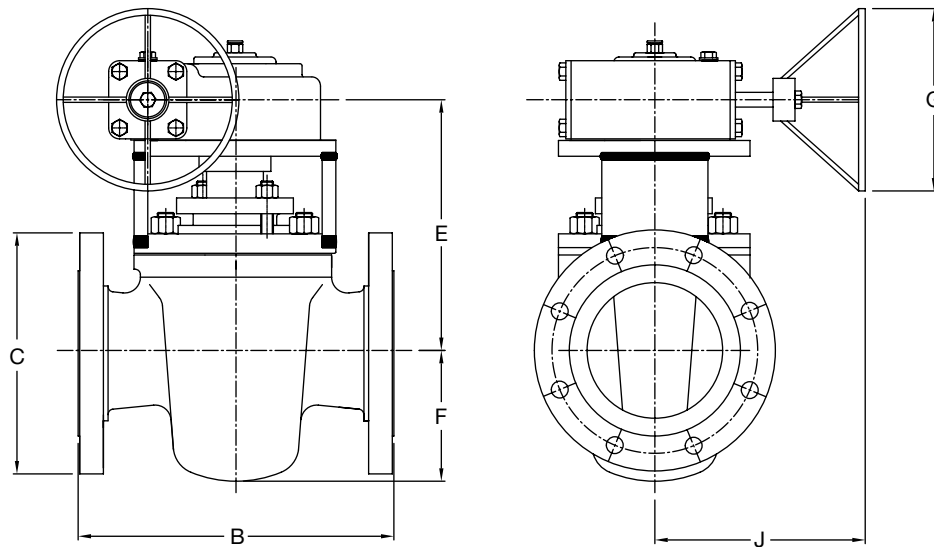


SRR X1R - Regular with Gear
SVR X1R - Venturi with Gear

			Regular Pattern		Venturi Pattern	
Size	NPS DN		6 150	8 200	10 250	12 300
FACE TO FACE	B	mm	394	457	533	610
FLANGE DIAMETER ANSI 125 FF	C	mm	279	343	406	483
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	585	690	770	810
CENTER LINE TO BOTTOM OF BODY	F	mm	185	230	290	330
DIAMETER	G	mm	560	560	560	560
LONGITUDINAL CENTER LINE TO FACE TO HANDWHEEL	J	mm	330	330	450	450
WEIGHT		kg	115	146	210	290



ANSI Class 150 (PN 20)

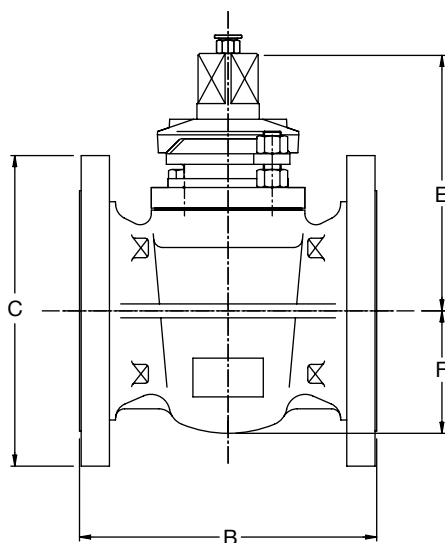


SCC X1R - Short with Wrench

			Short Pattern								
Size	NPS DN		1 25	1½ 40	2 50	2½ 65	3 80	4 100	5 125	6 150	8 200
END TO END THREADED	A	mm	-	-	150	170	180	210	-	-	-
FACE TO FACE	B	mm	140	165	178	191	203	229	254	267	292
FLANGE DIAMETER ANSI 150 RF	C	mm	108	127	152	178	191	229	254	279	343
N. TAPPED HOLES UNC THREADED IN FLANGES			-	-	-	-	-	-	2	2	2
CENTER LINE TO TOP OF STEM	E	mm	107	136	152	176	207	230	245	300	330
CENTER LINE TO BOTTOM OF BODY	F	mm	42	62	67	76	100	110	130	160	180
WEIGHT THREADED ENDS		kg	-	-	9	15	21	31	-	-	-
WEIGHT FLANGED		kg	6	10	14	20	27	40	62	80	110
WRENCH - LENGHT		mm	235	320	320	400	500	570	720	1010	1230



ANSI Class 150 (PN 20)

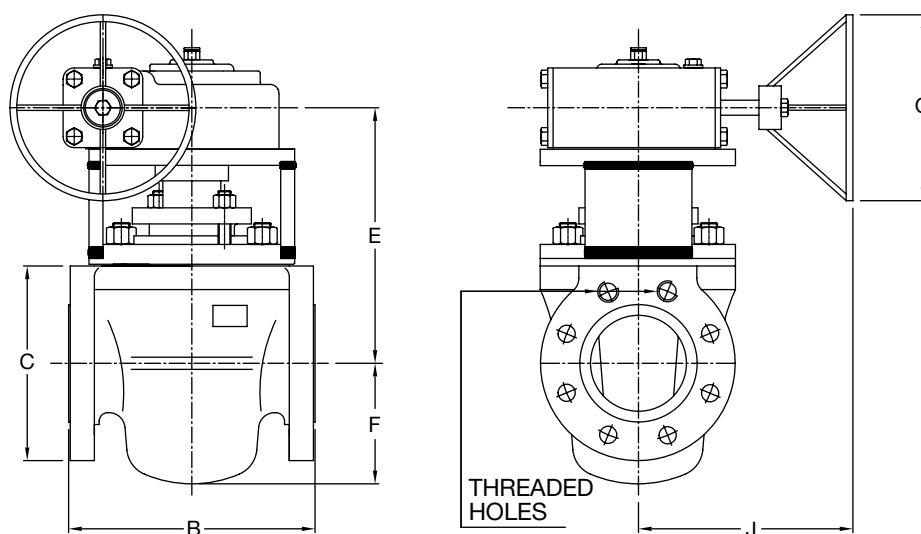


SCR 01R - Short with Gear

			Short Pattern			
Size	NPS DN		6 150	8 200	10 250	12 300
FACE TO FACE	B	mm	267	292	330	356
FLANGE DIAMETER DIN PN 16	C	mm	285	340	405	460
FLANGE DIAMETER ANSI 150	C	mm	279	343	406	483
N. TAPPED HOLES UNC THREADED IN FLANGES			2	2	2	4
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	570	600	630	690
CENTER LINE TO BOTTOM OF BODY	F	mm	160	180	220	286
HANDWHEEL DIAMETER	G	mm	560	560	560	560
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J	mm	330	330	450	450
WEIGHT		kg	115	146	210	270



ANSI Class 150 (PN 20)

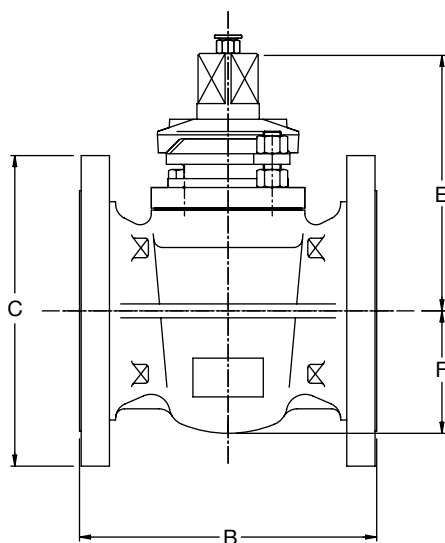


SRC X1R - Regular with Wrench

			Regular Pattern									
Size	NPS DN		1 25	1¼ 32	1½ 40	2 50	2½ 65	3 80	4 100	5 125	6 150	8 200
END TO END THREADED	A	mm	110	130	135	165	190	205	275	-	-	-
FACE TO FACE	B	mm	140	150	165	200	220	240	300	350	394	457
FLANGE DIAMETER DIN PN 16	C	mm	115	140	150	165	185	200	220	250	285	340
FLANGE DIAMETER ANSI 150	C	mm	108	117	127	152	178	191	229	254	279	343
CENTER LINE TO TOP OF STEM	E	mm	120	140	152	176	207	230	245	296	330	410
CENTER LINE TO BOTTOM OF BODY	F	mm	42	60	65	80	102	114	133	156	185	230
WEIGHT THREADED ENDS	kg		3,4	7	8	14	18	26	51	-	-	-
WEIGHT FLANGED	kg		6	9	11	19	27	31	55	74	107	175
WRENCH - LENGHT	mm		235	320	320	400	500	570	720	1010	1010	1230



ANSI Class 150 (PN 20)

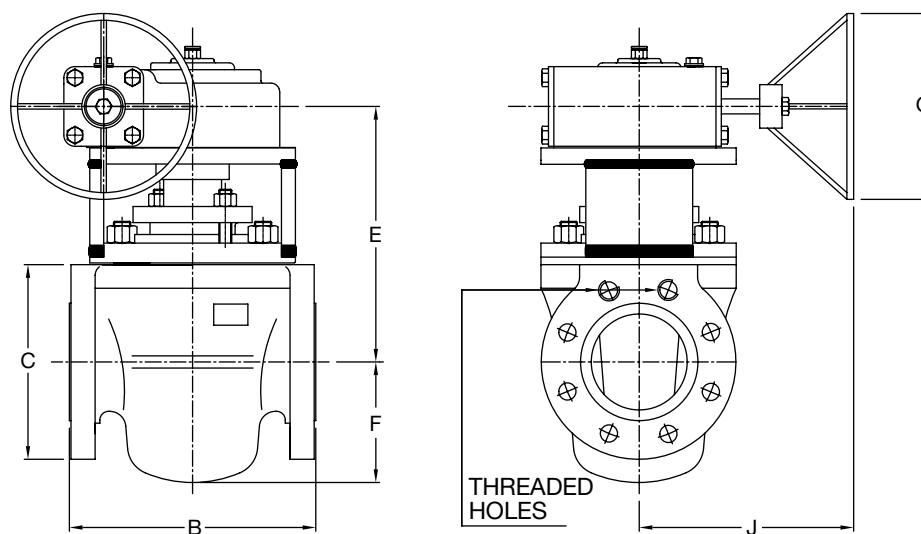


SRR 01R - Regular with Gear
SVR 01R - Venturi with Gear

			Regular Pattern		Venturi Pattern	
Size		NPS DN	6 150	8 200	10 250	12 300
FACE TO FACE	B	mm	394	457	533	610
FLANGE DIAMETER DIN PN 16	C	mm	285	340	405	460
FLANGE DIAMETER ANSI 150	C	mm	279	343	406	483
CENTER LINE TO TOP OF HANDWHEEL	E	mm	585	690	770	810
CENTER LINE TO BOTTOM OF BODY	F	mm	185	230	290	330
HANDWHEEL DIAMETER	G	mm	560	560	560	560
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J	mm	330	330	450	450
WEIGHT		kg	135	215	240	280



ANSI Class 300 (PN 50)

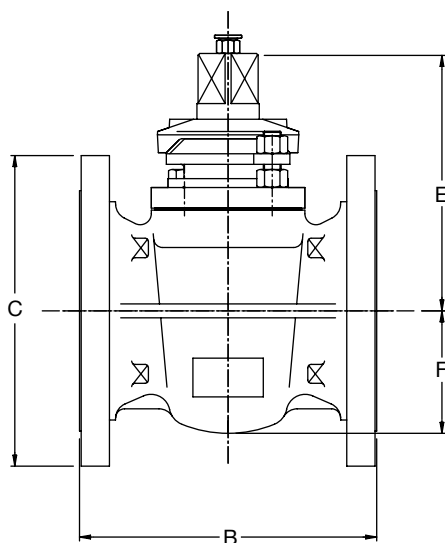


SCC X1R - Short with Wrench

		Short Pattern										
Size	NPS DN	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50	2 1/2 65	3 80	4 100	5 125	6 150
END TO END THREADED	A mm	90	95	110	130	135	165	190	205	275	-	-
FACE TO FACE	B mm	130	150	159	-	190	216	241	283	305	-	403
FLANGE DIAMETER DIN PN 40	C mm	95	105	115	140	150	165	185	200	235	270	300
FLANGE DIAMETER ANSI 300 RF	C mm	95	117	124	-	156	165	191	210	254	279	318
CENTER LINE TO TOP OF STEM	E mm	92	115	120	140	152	176	207	230	245	296	300
CENTER LINE TO BOTTOM OF BODY	F mm	30	38	42	60	68	80	102	114	133	155	160
WEIGHT THREADED ENDS	kg	1,8	3	3,4	7	8	14	18	26	51	-	-
WEIGHT FLANGED	kg	3	4,5	6,5	10	13	20	30	38	69	95	130
WRENCH - LENGHT	mm	235	235	235	320	320	400	500	570	720	1010	1010



ANSI Class 300 (PN 50)

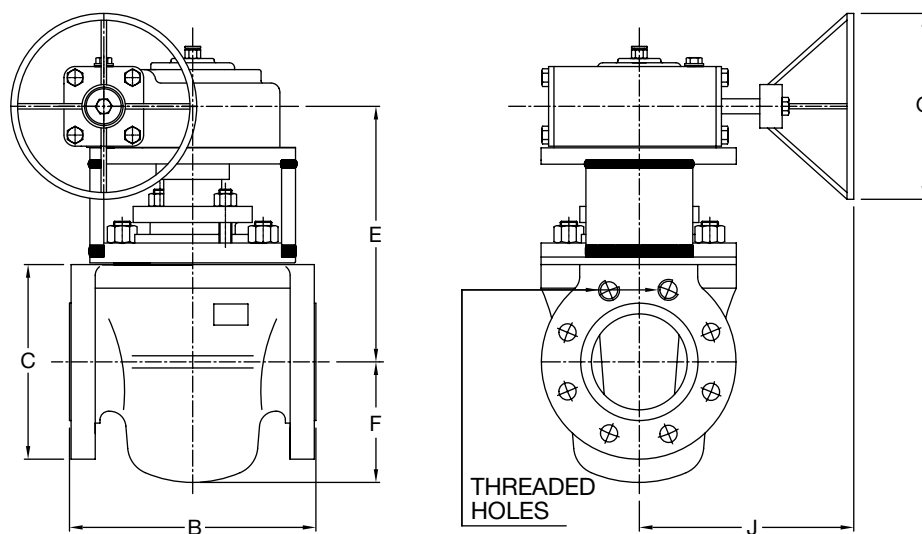

SCR 03R - Short with Gear


			Short Pattern				
Size	NPS DN		5 125	6 150	8 200	10 250	12 300
FACE TO FACE	B	mm	254	403	419	457	502
FLANGE DIAMETER DIN PN 40	C	mm	270	300	375	450	515
FLANGE DIAMETER ANSI 300 RF	C	mm	280	318	381	445	521
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	550	575	600	630	690
CENTER LINE TO BOTTOM OF BODY	F	mm	155	160	194	240	260
HANDWHEEL DIAMETER	G	mm	560	560	560	560	560
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J	mm	330	330	330	450	450
WEIGHT PN 40		kg	110	145	210	240	320
WEIGHT ANSI 300		kg	118	155	225	255	340



Section 2 - Two Way Full Jacketed (Oversized Flanges)




Full Bore Type Jacketed (Oversized Flanges)

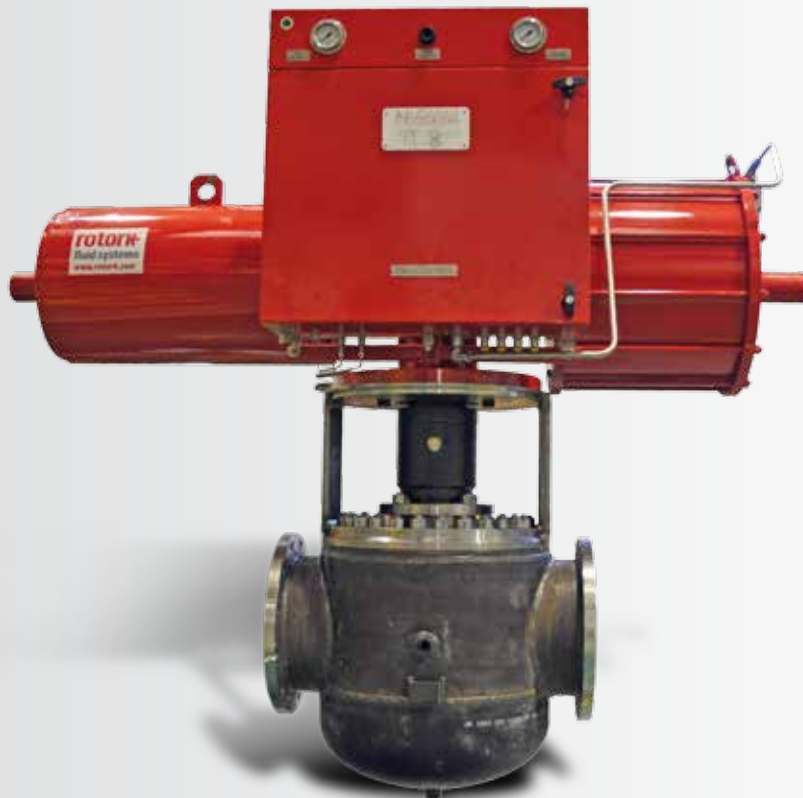



ANSI Class 150 (PN 20)

Steam Jacketed Body

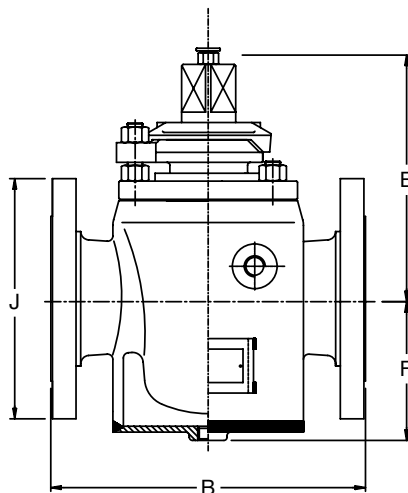


VCC 01R - Short with Wrench

			Short Pattern				
Size	NPS DN		2 50	2½ 65	3 80	4 100	6 150
FACE TO FACE ANSI 150 RF	B	mm	178	191	203	229	267
FLANGE DIAMETER PN 16	C	mm	165	185	200	220	285
FLANGE DIAMETER ANSI 150	C	mm	152	178	191	229	279
N. TAPPED HOLES UNC THREADED IN FLANGES			-	-	-	-	2
CENTER LINE TO TOP OF STEM	E	mm	152	176	207	230	300
CENTER LINE TO BOTTOM OF BODY	F	mm	103	115	136	151	210
STEAM/CONDENSATE N. HOLES ¾" N.P.T.	P		3	3	3	3	3
WEIGHT		kg	16	24	31	43	105
WRENCH - LENGHT		mm	320	400	500	570	1010



ANSI Class 150 (PN 20)

Steam Jacketed Body

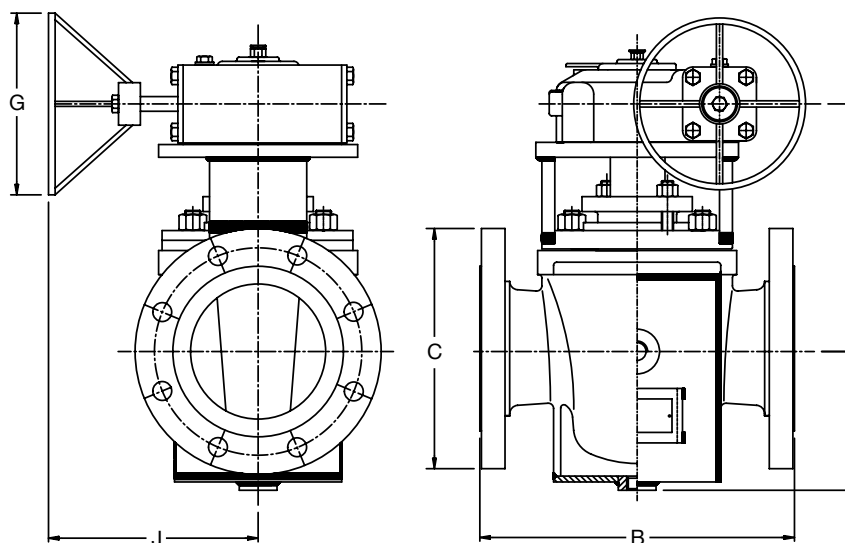


VCR 01R - Short with Gear

		Short Pattern			
Size	NPS DN	6 150	8 200	10 250	12 300
FACE TO FACE	B mm	267	292	330	356
FLANGE DIAMETER DIN PN 16	C mm	285	340	405	460
FLANGE DIAMETER ANSI 150 RF	C mm	279	343	406	483
N. TAPPED HOLES UNC THREADED IN FLANGES		2	2	2	4
CENTER LINE TO CENTER OF HANDWHEEL	E mm	570	600	630	690
CENTER LINE TO BOTTOM OF BODY	F mm	200	235	270	334
HANDWHEEL DIAMETER	G mm	560	560	560	560
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J mm	330	330	450	450
STEAM/CONDENSATE N. HOLES $\frac{3}{4}$ " N.P.T.	P	3	3	3	3
WEIGHT	kg	140	180	230	325



ANSI Class 150 (PN 20)

Steam Jacketed Body

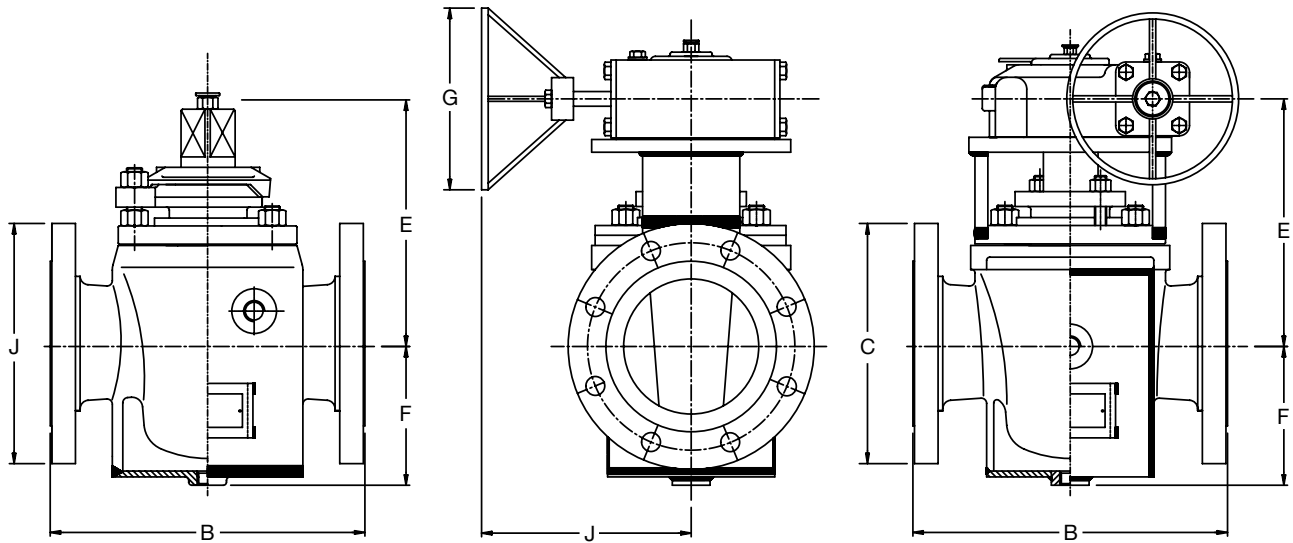

VRC 01R - Regular with Wrench


VRR 01R - Regular with Gear

			Regular Pattern						
Size	NPS DN		1½ 40	2 50	2½ 65	3 80	4 100	6 150	8 200
FACE TO FACE	B	mm	165	200	220	240	350	450	450
FLANGE DIAMETER DIN PN 16	C	mm	150	165	185	200	220	285	285
FLANGE DIAMETER ANSI 150	C	mm	127	152	178	191	229	279	279
CENTER LINE TO TOP OF STEM	E	mm	156	175	208	230	250	330	-
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	-	-	-	-	-	-	650
CENTER LINE TO BOTTOM OF BODY	F	mm	97	115	130	145	180	245	245
HANDWHEEL DIAMETER	G	mm	-	-	-	-	-	560	560
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J	mm	-	-	-	-	-	330	330
STEAM/CONDENSATE N. HOLES ¾" N.P.T.	P		3	3	3	3	3	3	3
WEIGHT	kg		14	22	30	36	80	154	175
WRENCH - LENGHT	mm		320	400	500	570	720	-	-



ANSI Class 300 (PN 50)

Steam Jacketed Body

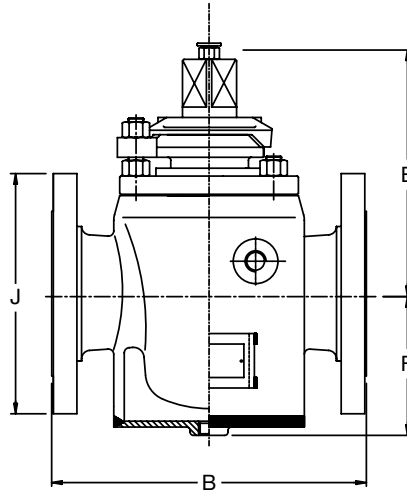


VCC 03R - Short with Wrench

			Short Pattern				
Size	NPS DN		1½ 40	2 50	2½ 65	3 80	4 100
FACE TO FACE	B	mm	190	216	241	283	305
FLANGE DIAMETER DIN PN 40	C	mm	150	165	185	200	235
FLANGE DIAMETER ANSI 300 RF	C	mm	156	165	191	210	254
CENTER LINE TO TOP OF STEAM	E	mm	156	175	208	230	250
CENTER LINE TO BOTTOM OF BODY	F	mm	97	115	130	145	180
STEAM/CONDENSATE N. HOLES ¾" N.P.T.	P		3	3	3	3	3
WEIGHT PN 40		kg	14	22	30	36	86
WEIGHT ANSI 300		kg	17	23	32	42	95
WRENCH - LENGHT		mm	320	400	500	570	720



ANSI Class 300 (PN 50)

Steam Jacketed Body

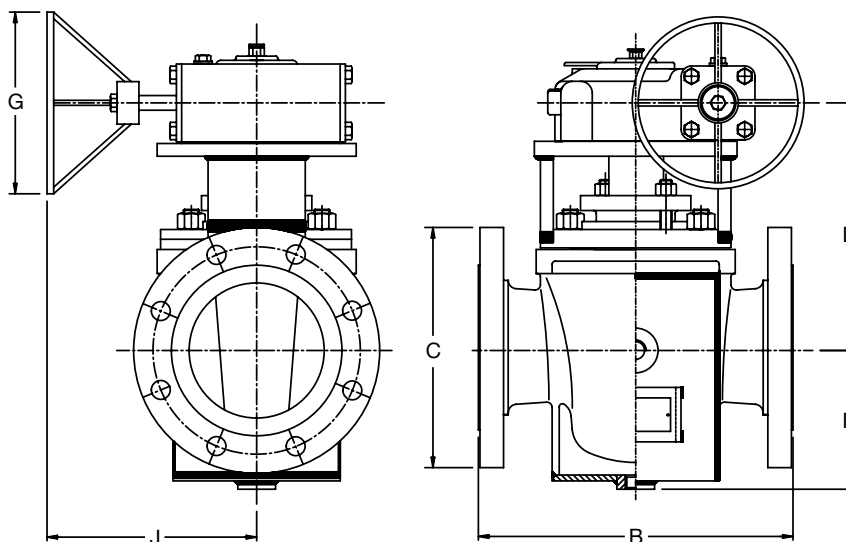


VCR 03R - Regular with Gear

			Short Pattern			
Size	NPS DN		6 150	8 200	10 250	12 300
FACE TO FACE	B	mm	403	419	457	502
FLANGE DIAMETER DIN PN 40	C	mm	300	375	450	515
FLANGE DIAMETER ANSI 300 RF	C	mm	318	381	445	521
CENTER LINE TO TOP OF HANDWHEEL	E	mm	575	615	645	700
CENTER LINE TO BOTTOM OF BODY	F	mm	220	255	295	310
HANDWHEEL DIAMETER	G	mm	560	560	560	560
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J	mm	330	330	450	450
STEAM/CONDENSATE N. HOLES $\frac{3}{4}$ " N.P.T.	P		3	3	33	
WEIGHT PN 40		kg	180	250	320	445
WEIGHT ANSI 300		kg	190	260	330	460




ANSI Class 150 (PN 20)


Full Jacketed Body

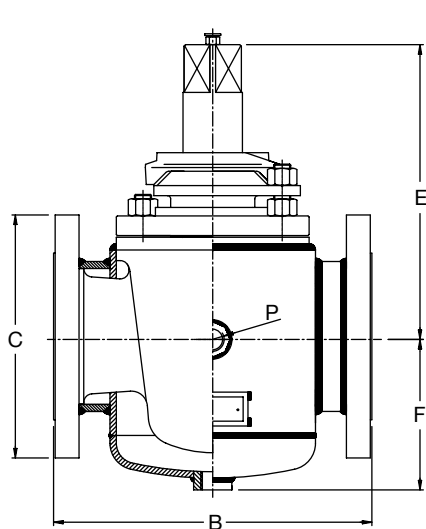

ZRC 01R - Regular with Wrench

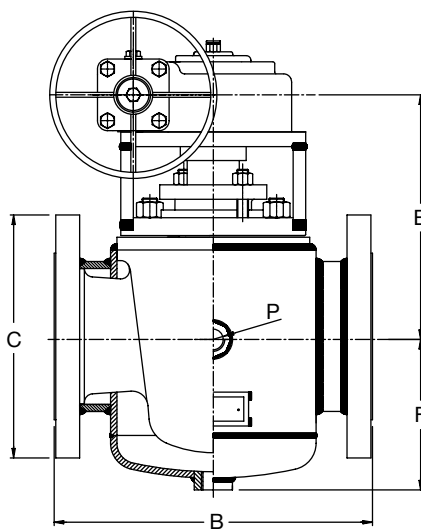

ZRR 01R - Regular with Gear

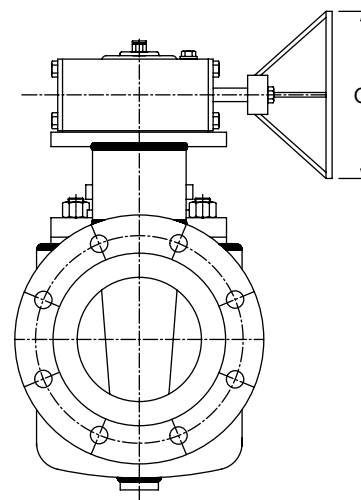


			Regular Pattern						
Size	NPS DN		1x2 25x50	1½ x 2½ 40x65	2x3 50x80	3x4 80x100	4x6 100x150	6x8 150x200	8x10 200x250
FACE TO FACE	B	mm	200	220	240	300	390	419	457
FLANGE DIAMETER PN 16	C	mm	165	185	200	220	285	340	405
FLANGE DIAMETER ANSI 150	C	mm	152	178	191	229	279	343	406
CENTER LINE TO TOP OF STEM	E	mm	120	156	175	230	245	--	
CENTER LINE TO BOTTOM OF BODY	F	mm	75	97	115	145	175	220	260
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	-	-	-	-	-	500	615
HANDWHEEL DIAMETER		mm	-	-	-	-	-	560	560
STEAM/INLET N. 2 HOLES N.P.T.	P₁ or P	in.	½ - ¾	¾ - 1	¾ - 1	¾ - 1	¾ - 1	¾ - 1	¾ - 1
CONDENSATE OUTLET N. 1 HOLE N.P.T.	P₂	in.	¾	1	1	1	1	1	1
WRENCH - LENGHT		mm	235	320	400	570	720	-	-
WEIGHT		kg	13	20	27	45	115	210	270



ANSI Class 150 (PN 20)

Full Jacketed Body

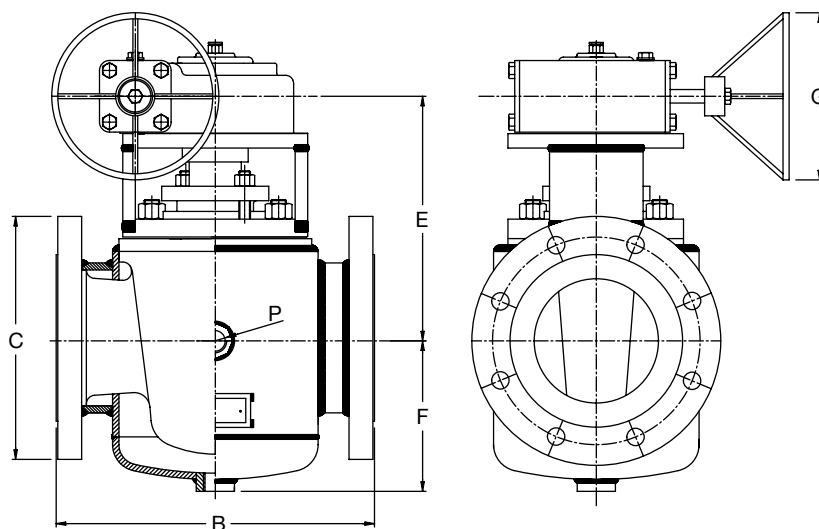

ZRR 01R - Regular with Gear


			Regular Pattern						
Size	NPS	DN	10x12 250x300	12x14 300x350	14x16 350x400	16x18 400x450	18x20 450x500	20x24 500x600	24x26 600x650
FACE TO FACE	B	mm	502	762	762	838	914	991	1143
FLANGE DIAMETER DIN PN 16	C	mm	460	520	580	640	715	840	★
FLANGE DIAMETER ANSI 150	C	mm	483	533	597	635	699	813	870
CENTER LINE TO BOTTOM OF BODY	F	mm	380	400	445	465	525	590	675
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	530	660	660	660	745	835	910
HANDWHEEL DIAMETER		mm	800	1000	1000	1000	1000	1000	1000
STEAM/INLET N. 2 HOLES N.P.T.	P ₁ or P	in.	¾ - 1	¾ - 1	¾ - 1	¾ - 1	¾ - 1	¾ - 1	¾ - 1
CONDENSATE OUTLET N. 1 HOLE N.P.T.	P ₂	in.	1	1	1	1	1	1	1
WEIGHT		kg	360	525	690	965	1240	1480	2160

* **Note:** To be confirmed.




ANSI Class 300 (PN 50)


Full Jacketed Body

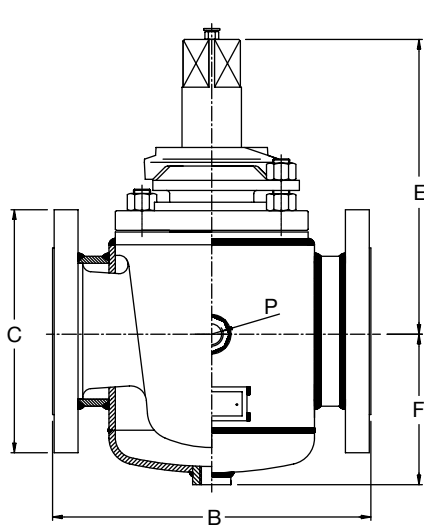

ZRC 03R - Regular with Wrench

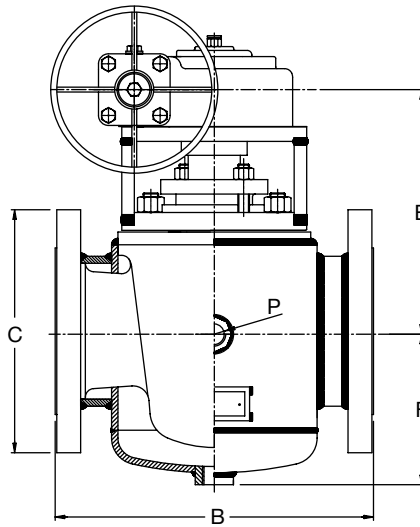

ZRR 03R - Regular with Gear

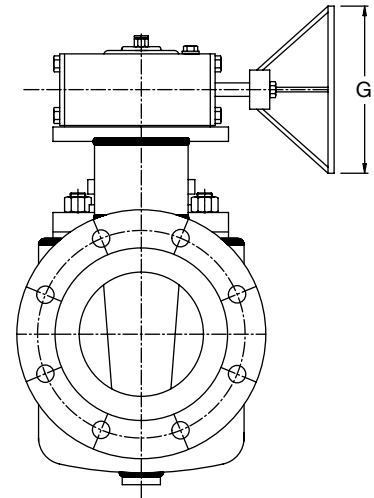


			Regular Pattern						
Size	NPS DN		1x2 25x50	1½x2½ 40x65	2x3 50x80	3x4 80x100	4x6 100x150	6x8 150x200	8x10 200x250
FACE TO FACE	B	mm	200	240	260	300	403	419	457
FLANGE DIAMETER DIN PN 40	C	mm	165	185	200	235	300	375	450
FLANGE DIAMETER ANSI 300	C	mm	165	191	210	254	318	381	445
CENTER LINE TO TOP OF STEM	E	mm	110	156	175	230	245	-	-
CENTER LINE TO BOTTOM OF BODY	F	mm	70	97	115	145	175	220	260
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	-	-	-	-	-	500	615
HANDWHEEL DIAMETER		mm	-	-	-	-	-	700	800
STEAM/INLET N. 2 HOLES N.P.T.	P₁ or P	in.	½ - ¾	¾ - 1	¾ - 1	¾ - 1	¾ - 1	¾ - 1	¾ - 1
CONDENSATE OUTLET N. 1 HOLE N.P.T.	P₂	in.	¾	1	1	1	1	1	1
WEIGHT		kg	18	28	38	63	160	290	370
WRENCH - LENGHT		mm	300	300	400	570	720	-	-



ANSI Class 300 (PN 50)

Full Jacketed Body

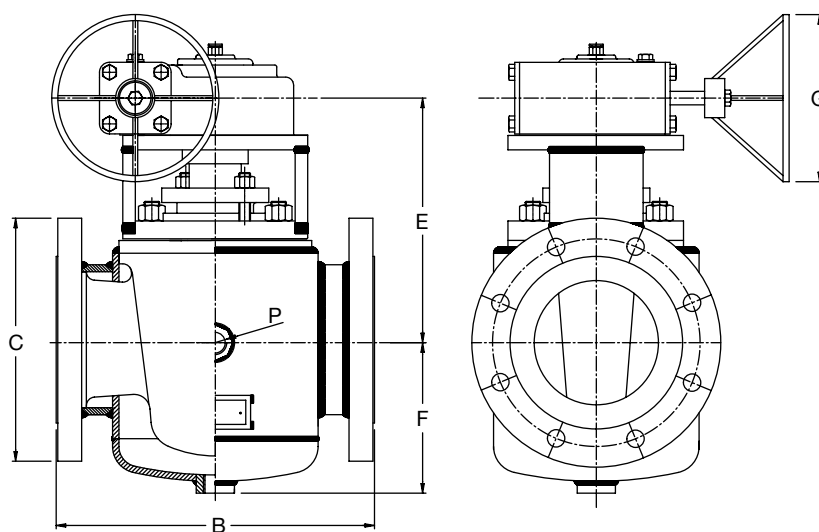

ZRR 03R - Regular with Gear


			Regular Pattern						
Size	NPS DN		10x12 250x300	12x14 300x350	14x16 350x400	16x18 450x500	18x20 450x500	20x24 500x600	24x26 600x650
FACE TO FACE	B	mm	502	762	762	838	914	991	1143
FLANGE DIAMETER DIN PN 40	C	mm	515	580	660	685	755	890	★
FLANGE DIAMETER ANSI 300	C	mm	521	584	648	711	775	914	972
CENTER LINE TO BOTTOM OF BODY	F	mm	380	400	445	465	525	590	675
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	521	660	660	660	745	835	915
HANDWHEEL DIAMETER		mm	800	800	1000	1000	1000	1000	1000
STEAM/INLET N. 2 HOLES N.P.T.	P₁ or P	in.	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1
CONDENSATE OUTLET N. 1 HOLE N.P.T.	P₂	in.	1	1	1	1	1	1	1
WEIGHT		kg	420	570	720	985	1260	1780	2590

* **Note:** To be confirmed.



ANSI Class 150 (PN 20)

Full Jacketed - Full Bore

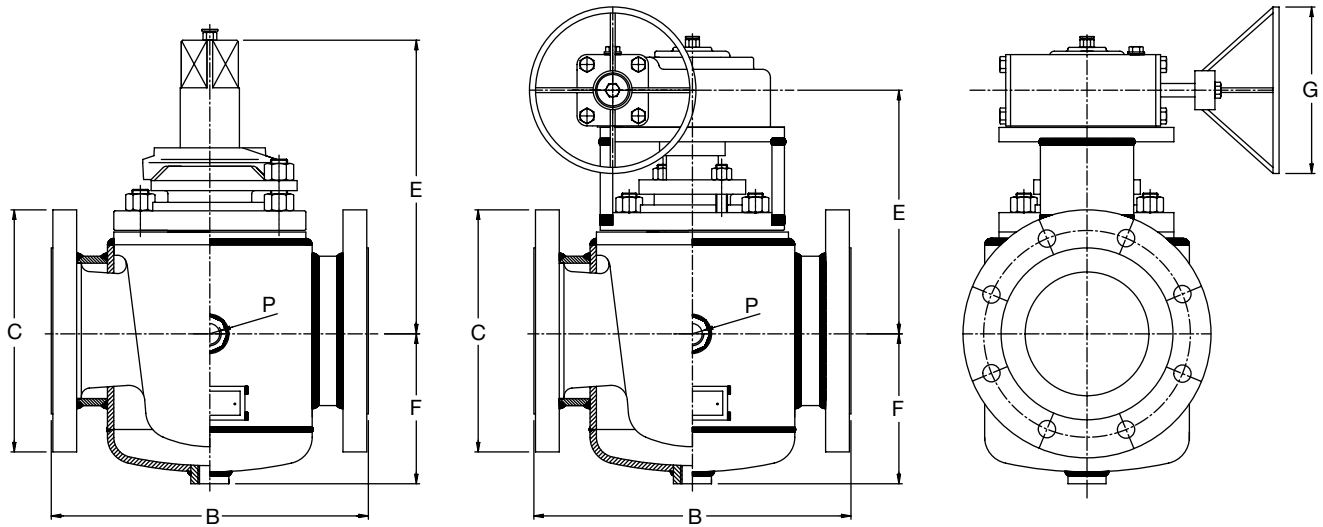

ZFC 01R - Full with Wrench


ZFR 01R - Full with Gear

			Full Bore						
Size		NPS DN	1x2 25x50	2x3 50x80	3x4 80x100	4x6 100x150	6x8 150x200	8x10 200x250	10x12 250x300
FACE TO FACE	B	mm	178	267	343	432	546	622	826
FLANGE DIAMETER DIN PN 16	C	mm	165	200	220	285	340	405	460
FLANGE DIAMETER ANSI 150	C	mm	153	191	229	280	343	406	483
CENTER LINE TO TOP OF STEM	E	mm	110	185	205	240	-	-	-
CENTER LINE TO BOTTOM OF BODY	F	mm	70	120	140	178	220	235	526
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	-	-	-	-	340	390	504
HANDWHEEL DIAMETER		mm	-	-	-	-	-	800	800
STEAM/INLET N. 2 HOLES N.P.T.	P₁ or P	in.	1/2 - 3/4	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1
CONDENSATE OUTLET N. 1 HOLE N.P.T.	P₂	in.	3/4	1	1	1	1	1	1
WRENCH - LENGHT		mm	300	500	500	550	-	-	-




ANSI Class 300 (PN 50)


Full Jacketed - Full Bore

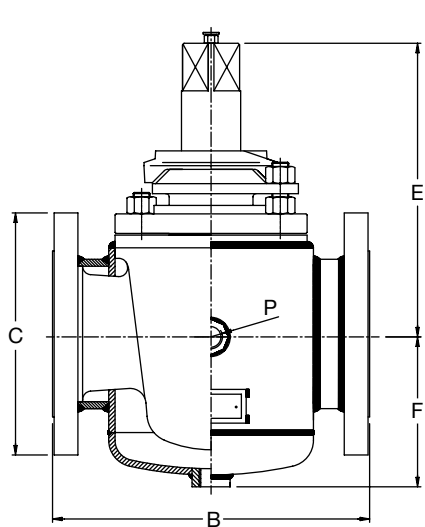

ZFC 03R - Full with Wrench

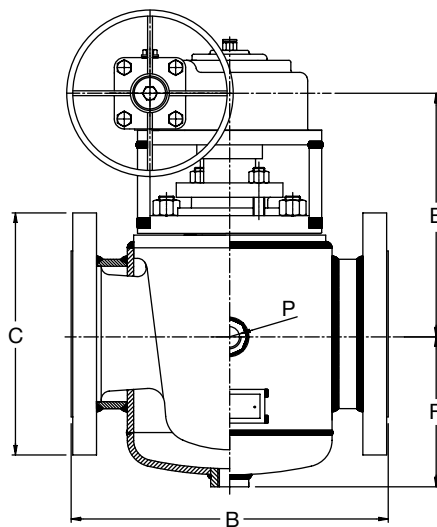

ZFR 03R - Full with Gear

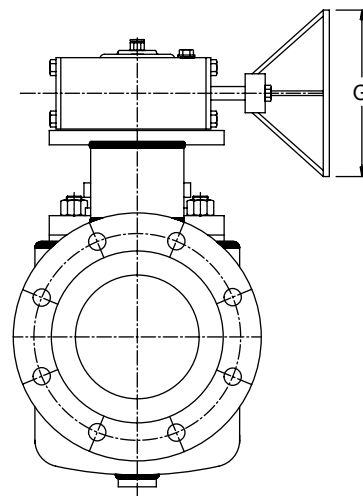

Size	NPS DN	Full Bore						
		1x2 25x50	2x3 50x80	3x4 80x100	4x6 100x150	6x8 150x200	8x10 200x250	10x12 250x300
FACE TO FACE	B mm	191	283	387	457	559	686	826
FLANGE DIAMETER DIN PN 40	C mm	165	200	235	300	375	450	515
FLANGE DIAMETER ANSI 300	C mm	165	210	254	318	381	445	521
CENTER LINE TO TOP OF STEM	E mm	110	185	205	240	-	-	-
CENTER LINE TO BOTTOM OF BODY	F mm	70	120	140	178	220	235	526
CENTER LINE TO CENTER OF HANDWHEEL	E mm	-	-	-	-	340	390	504
HANDWHEEL DIAMETER	mm	-	-	-	-	-	800	800
STEAM/INLET N. 2 HOLES N.P.T.	P₁ or P in.	1/2 - 3/4	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1	3/4 - 1
CONDENSATE OUTLET N. 1 HOLE N.P.T.	P₂ in.	3/4	1	1	1	1	1	1
WRENCH - LENGHT	mm	300	500	500	550	-	-	-



Section 3 - Multiport Three-Four Way Valves

Multiport plug valves are built with the same characteristics such as the two way standard valves or inverted


plug valves. Application of multiport plug valve gives more advantages than two way valves.

In fact it can simplify the loop in diverting or mixing flow systems, reducing the cost of other components in the plant

such as flanges, pipes and fittings. Three way plug valves can be made regular and transflow pattern.



Regular Pattern

This design avoids mixture of the fluids in the body, in fact when the plug is turned from one position A to another B, the fluid in B starts to open in B as soon as the first fluid A is insulated.




Transflow Pattern


This design is the right solution when temporary shutt off of the flow is not allowed. Therefore when the plug is turned from one position A to another B, the fluid in B starts to open before the first one is completely insulated.

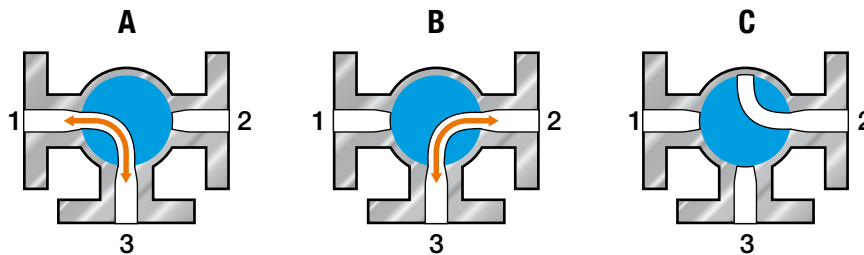

3 Way - L Ported Valves

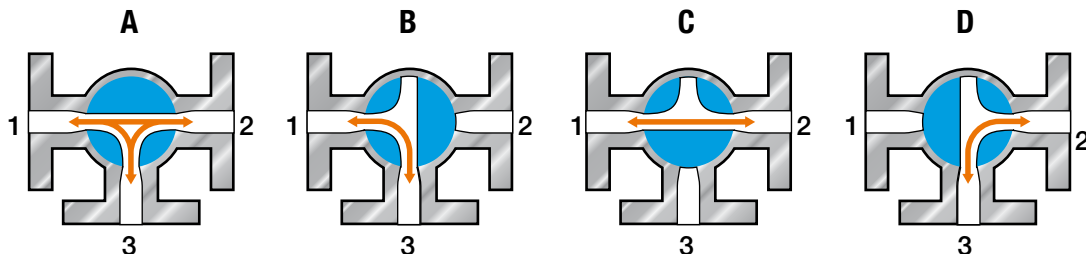

3 Way - T Ported Valves

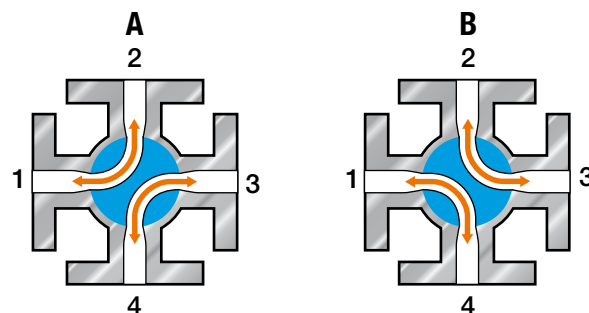

4 Way - Double Ported Valves

Four way valves can only be used as distributor,

they cannot be expected to guarantee tightness under


high differential pressure without some leakage from

one side of the valve to the other.



ANSI Class 150 (PN 20)

3 and 4 Way - Type - (Transflow/Regular)

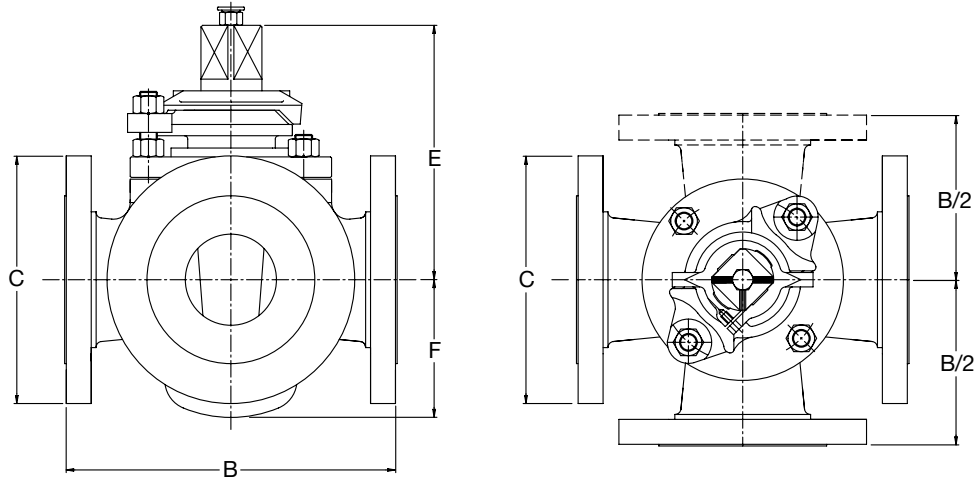


MRC 01R - 3 way T port with Wrench
LRC 01R - 3 way L port with Wrench
URC 01R - 4 way with Wrench

			Long Pattern							
Size		NPS DN	1 25	1¼ 32	1½ 40	2 50	2½ 65	3 80	4 100	5 125
FACE TO FACE	B	mm	165	200	220	267	267	300	350	390
FLANGE DIAMETER DIN PN 16	C	mm	115	140	150	165	185	200	220	250
FLANGE DIAMETER ANSI 150	C	mm	108	117	127	152	178	191	229	254
CENTER LINE TO TOP OF STEM	E	mm	140	157	177	200	230	250	265	305
CENTER LINE TO BOTTOM OF BODY	F	mm	60	65	76	92	108	136	147	165
WEIGHT THREE WAY		kg	10	16	18	25	36	55	80	100
WEIGHT FOUR WAY		kg	14	20	22	30	42	65	95	120
WRENCH - LENGHT		mm	320	320	400	500	570	720	1010	1030



ANSI Class 150 (PN 20)

3 and 4 Way - Type - (Transflow)

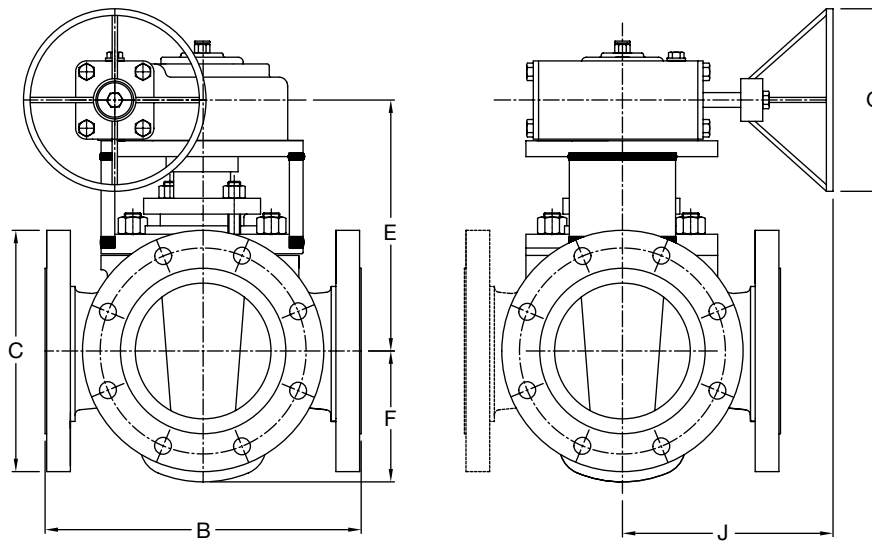


MRR 01R - 3 way T port with Wrench
LRR 01R - 3 way L port with Wrench
URR 01R - 4 way with Gear (Not Shown)

			Long Pattern			
Size	NPS DN		4 100	5 125	6 150	8 200
FACE TO FACE	B	mm	350	413	457	508
FLANGE DIAMETER DIN PN 16	C	mm	220	250	285	340
FLANGE DIAMETER ANSI 150	C	mm	229	254	279	343
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	550	586	656	686
CENTER LINE TO BOTTOM OF BODY	F	mm	147	165	215	270
HANDWHEEL DIAMETER	G	mm	560	560	700	700
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J		260	330	330	450
WEIGHT THREE WAY	kg		110	140	220	290
WEIGHT FOUR WAY	kg		125	160	260	320



ANSI Class 300 (PN 50)

3 and 4 Way (Regular)

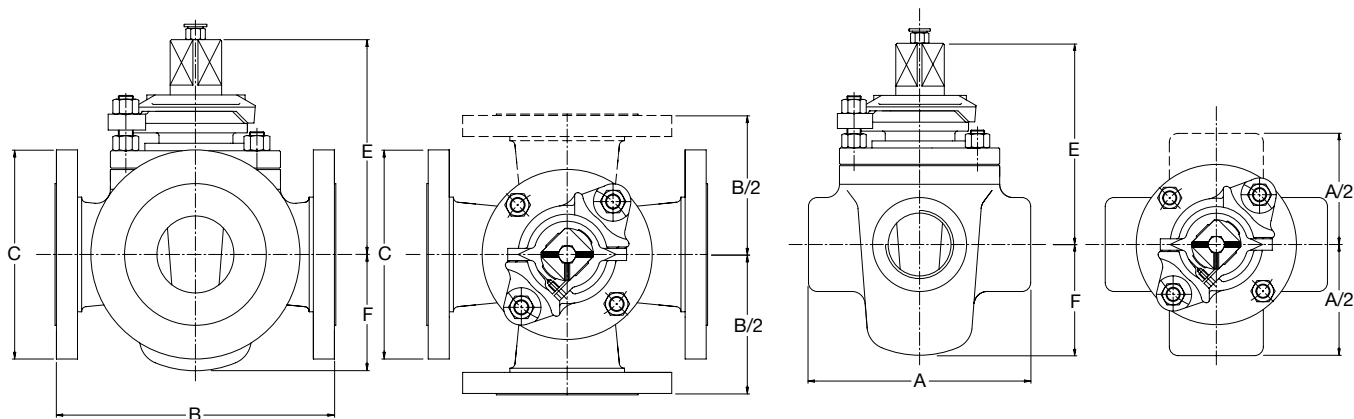

MRC 03T - 3 way T port with Wrench
LRC 03T - 3 way L port with Wrench
URC 03T - 4 way with Wrench


MRC 03R - 3 way T port with Wrench
LRC 03R - 3 way L port with Wrench
URC 03R - 4 way with Wrench

			Long Pattern						
Size	NPS DN		1/2 15	3/4 20	1 25	1 1/2 40	2 50	3 80	4 100
FACE TO END	A	mm	110	110	135	145	170	-	-
FACE TO FACE	B	mm	150	170	190	240	283	335	410
FLANGE DIAMETER DIN PN 40	C	mm	95	105	115	150	165	200	235
FLANGE DIAMETER ANSI 300	C	mm	95	117	124	156	165	210	254
CENTER LINE TO TOP OF STEM	E	mm	107	107	140	177	200	243	292
CENTER LINE TO BOTTOM OF BODY	F	mm	42	42	60	77	92	128	150
WEIGHT 3 WAY THREADED ENDS	kg		4	4	6	15	20	-	-
WEIGHT 4 WAY THREADED ENDS	kg		4,5	5	7,5	16	22	-	-
WEIGHT 3 WAY FLANGED	kg		6,5	6	10	20	28	67	103
WEIGHT 4 WAY FLANGED	kg		-	8,5	12	24	35	82	120
WRENCH - LENGTH	mm		235	235	320	400	500	720	1010



ANSI Class 300 (PN 50)

3 and 4 Way - Type - (Transflow)

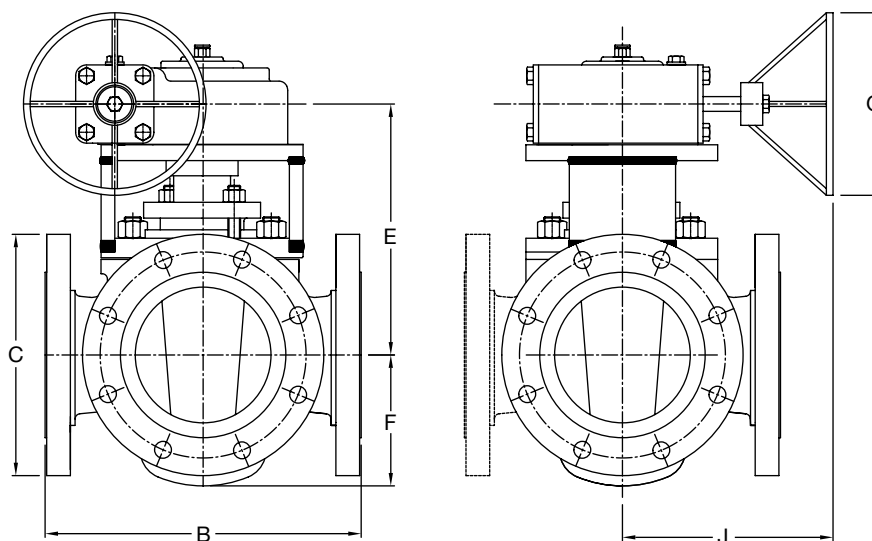

MRR 03R - 3 way T port with Gear
LRR 03R - 3 way L port with Gear
URR 03R - 4 way with Gear (Not Shown)

			Long Pattern			
Size	NPS DN		4 100	5 125	6 150	8 200
FACE TO FACE	B	mm	410	450	502	568
FLANGE DIAMETER DIN PN 40	C	mm	235	270	300	375
FLANGE DIAMETER ANSI 300	C	mm	254	279	318	381
CENTER LINE TO CENTER OF HANDWHEEL	E	mm	550	586	656	686
CENTER LINE TO BOTTOM OF BODY	F	mm	147	165	215	270
HANDWHEEL DIAMETER	G	mm	560	560	700	700
LONGITUDINAL CENTER LINE TO FACE OF HANDWHEEL	J		260	330	330	450
WEIGHT THREE WAY	kg		132	168	260	350
WEIGHT FOUR WAY	kg		150	190	312	385