


COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 150

(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel

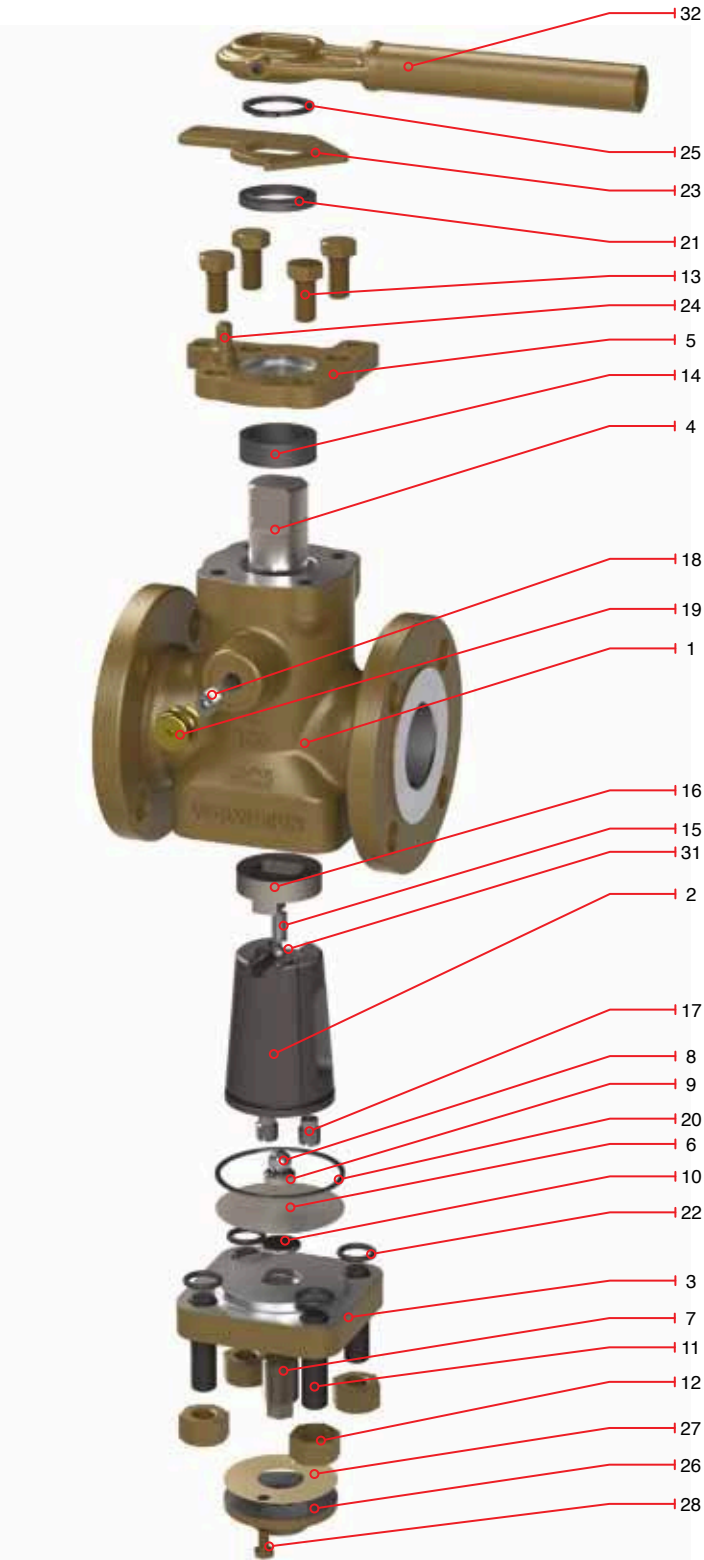

*Not Shown
(1) Valves from 1/2" to 1 1/2" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB



COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 150

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
1412	Wrench	RF
1414	Wrench	WE

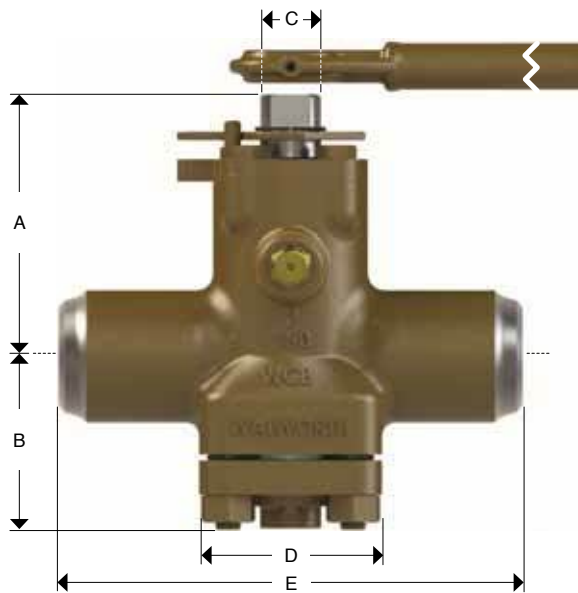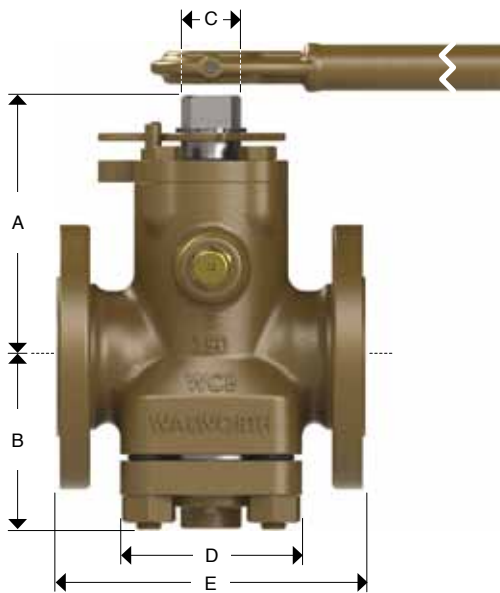

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ		WE						
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
2	50	5.9	150	3.78	96	1.37	35	4.125	105	7	178	7.5	191	10.5	267	16	35	-	-	IB-2
3	76	6.84	174	4.53	115	1.37	35	4.62	117	8	203	8.5	216	13	330	30	66	-	-	IB-2
4	100	7.37	187	5.05	128	1.37	35	5.25	133	9	229	9.5	241	14	356	35	77	31	68	IB-2
6	150	9.51	242	6.25	159	1.99	51	8.12	206	10.5	267	11	279	18	457	64	141	45	99	IB-3
8	200	11.75	298	9	229	1.99	51	9.75	248	11.5	292	12	305	20.5	521	89	196	70	154	IB-3

COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 150


(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

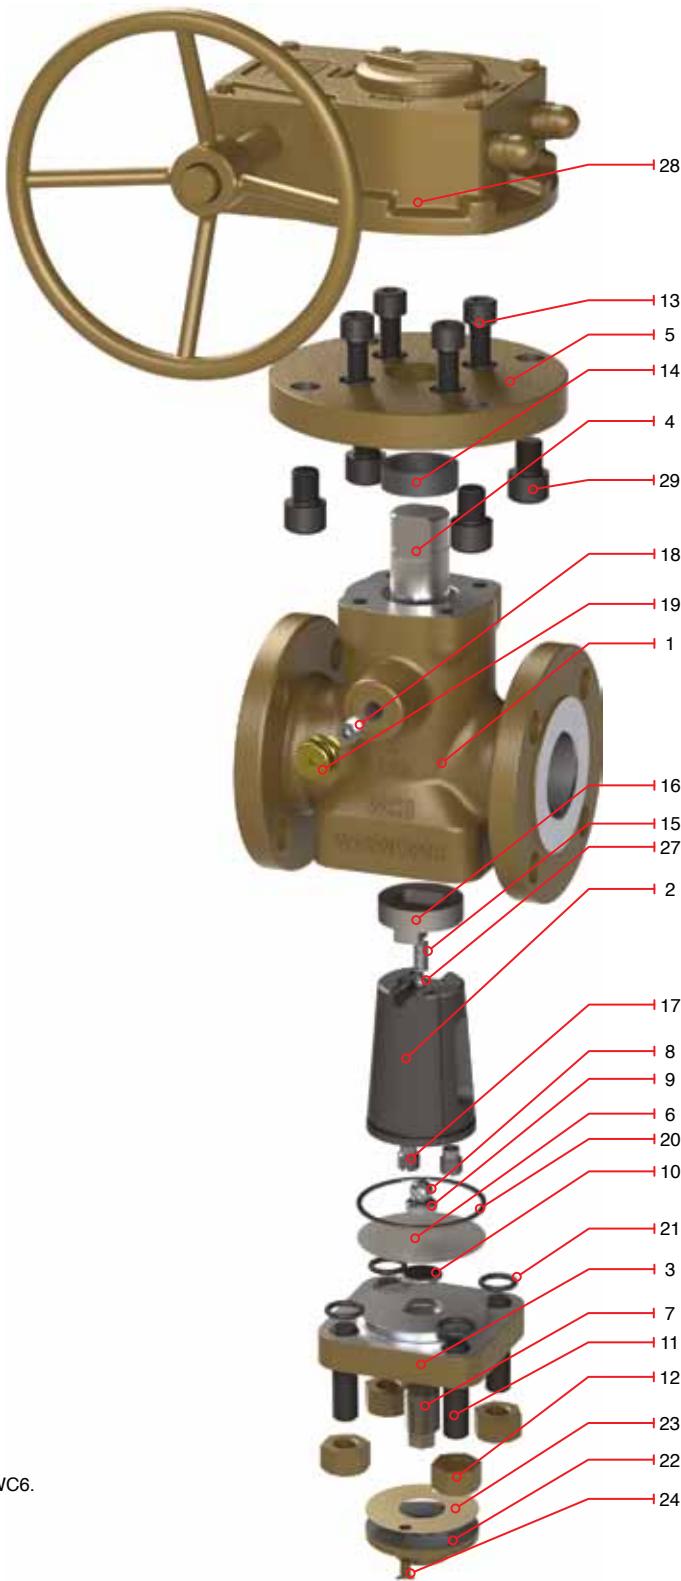



COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 150

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
1422	Gear operator	RF
1424	Gear operator	WE

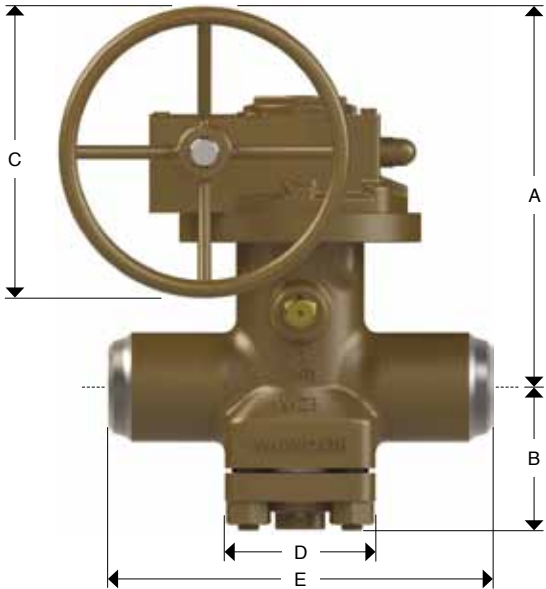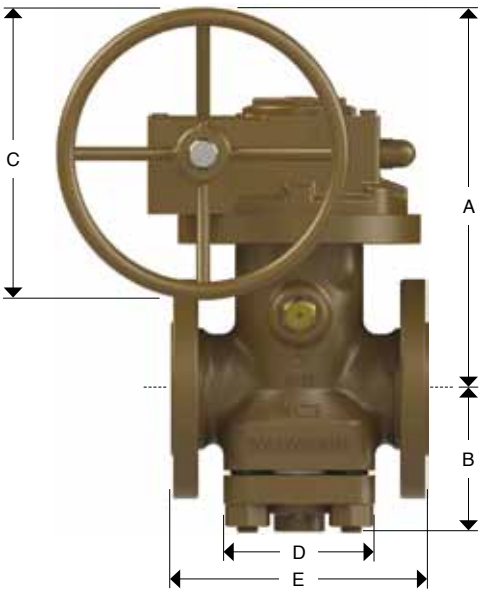

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
4	100	10.18	259	5.05	128	12	305	5.25	133	9	229	9.5	241	14	356	62	136	54	119
6	150	11.4	290	6.38	162	20	508	8.12	206	10.5	267	11	279	18	457	87	191	65	143
8	200	13.11	333	9	229	20	508	9.75	248	11.5	292	12	305	20.5	521	116	255	87	191
10	250	14.83	377	9.5	241	20	508	11.5	292	13	330	13.5	343	22	559	205	451	170	374
12	300	16.5	419	11.69	297	20	508	12	305	14	356	14.5	368	25	635	272	598	190	418


COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 300

(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel

*Not Shown

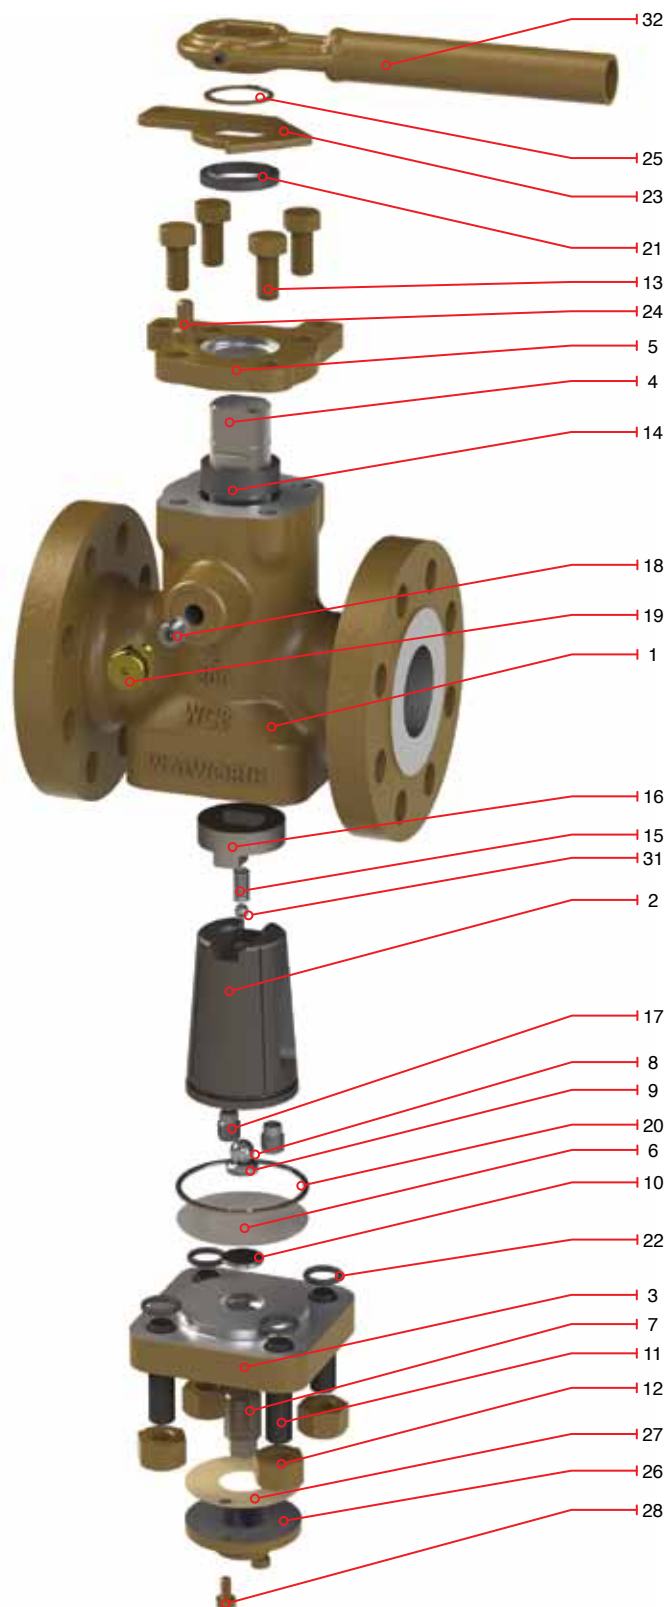



COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 300

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
3412	Wrench	RF
3413	Wrench	RTJ
3414	Wrench	WE

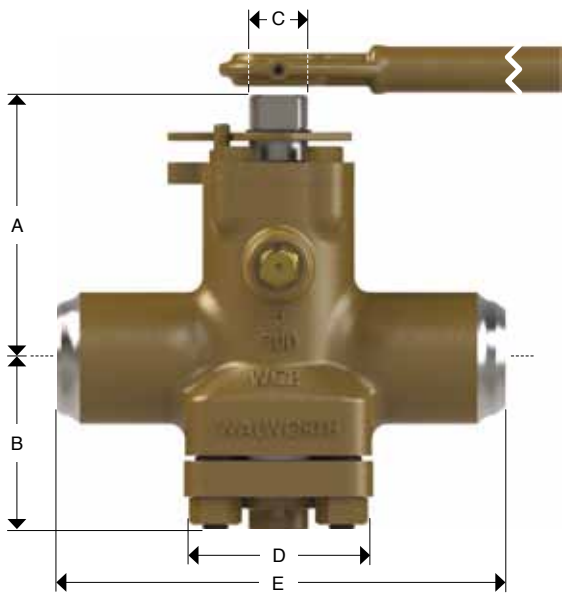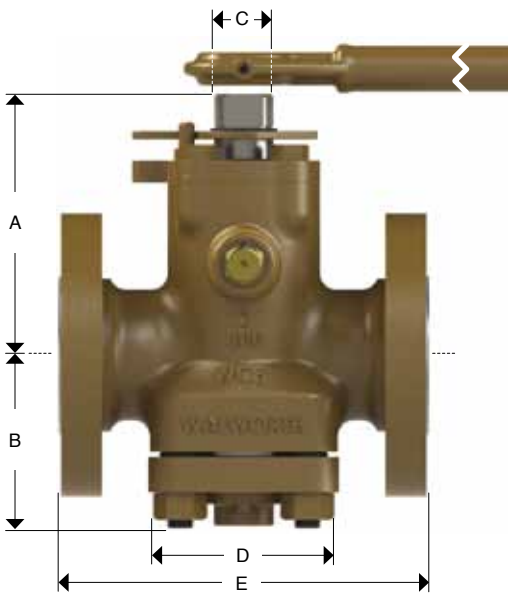

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ								
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
2	50	4.5	114	3.78	96	1.37	35	4.37	111	8.5	216	9.12	232	10.5	267	20	44	13	29	IB-2
3	76	6.84	174	4.41	112	1.37	35	4.62	117	11.12	283	11.75	298	13	330	35	77	26	57	IB-2
4	100	7.37	187	5.05	128	1.37	35	5.25	133	12	305	12.62	321	14	356	41	90	36	79	IB-2
6	150	9.51	242	6.38	162	1.99	51	8.12	206	15.87	403	16.50	419	18	457	91	200	73	161	IB-3
8	200	11.72	298	9.19	233	1.99	51	9.75	248	16.5	419	17.12	435	20.5	521	150	330	115	253	IB-3

COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 300


(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

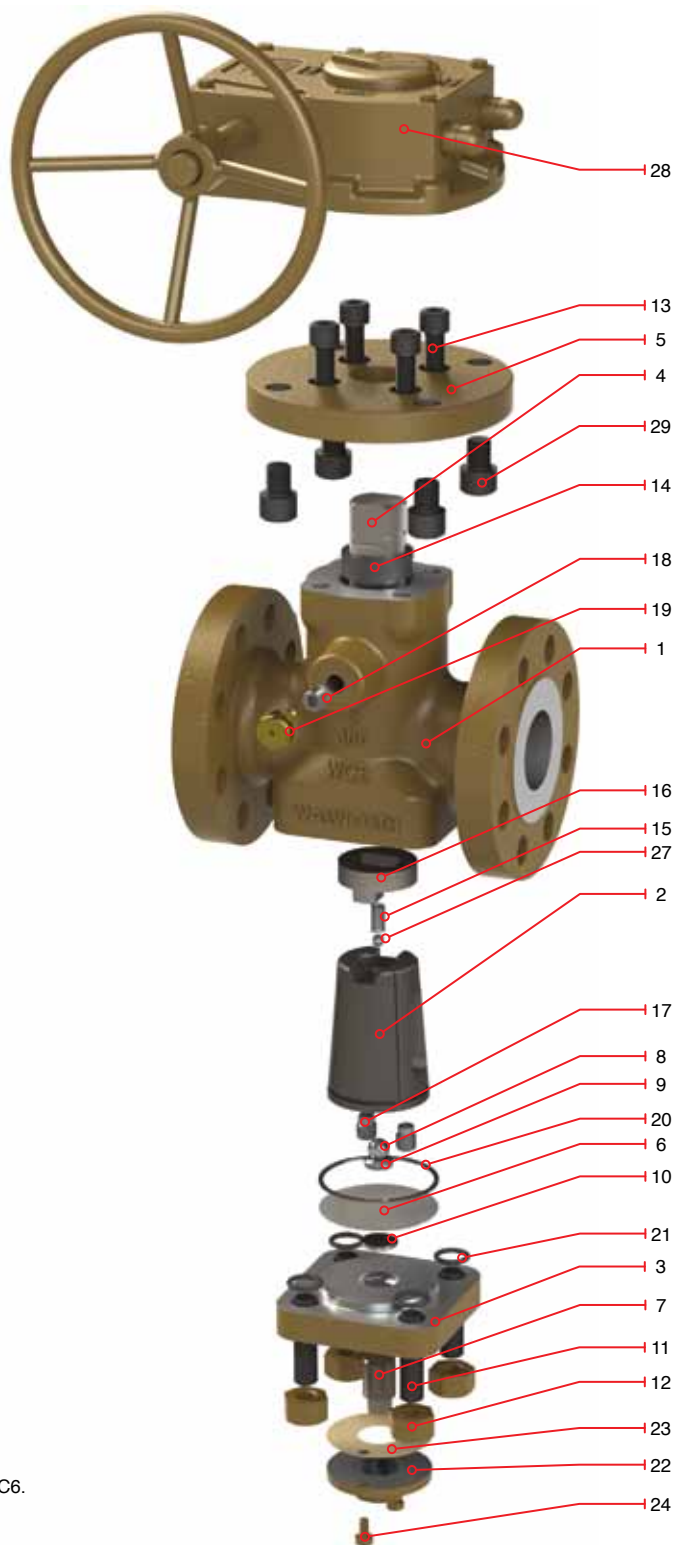



COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 300

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA


Figure no.	Operation	Type of ends
3422	Gear operator	RF
3423	Gear operator	RTJ
3424	Gear operator	WE

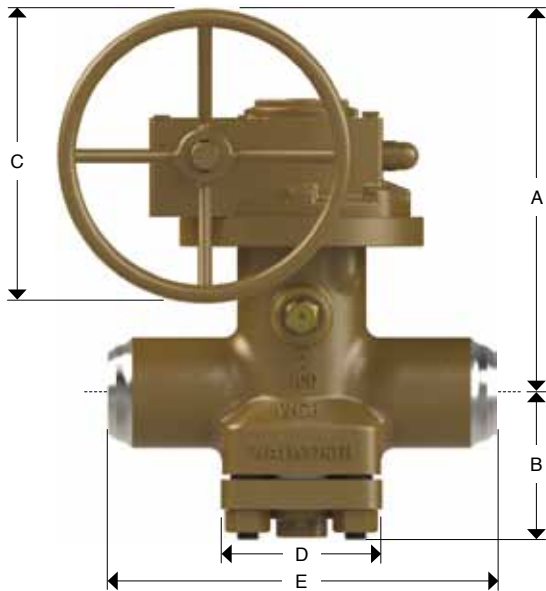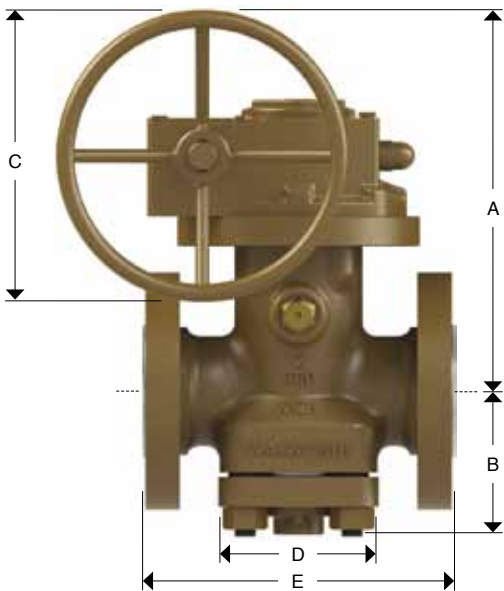

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
3	76	11.3	287	4.41	112	12	305	4.62	117	11.12	283	11.75	298	13	330	62	136	50	110
4	100	10.1	257	5.05	128	12	305	5.25	133	12	305	12.62	321	14	356	68	150	52	114
6	150	11.4	290	6.38	162	20	508	8.12	206	15.87	403	16.5	419	18	457	118	260	89	196
8	200	13.11	333	9.14	232	20	508	9.75	248	16.5	419	17.12	435	20.5	521	181	398	140	308
10	250	16.53	420	10.4	264	30	762	?	?	18	457	18.62	473	22	559	340	748	300	660

COMPENSATOR PLUG VALVE REGULAR PATTERN

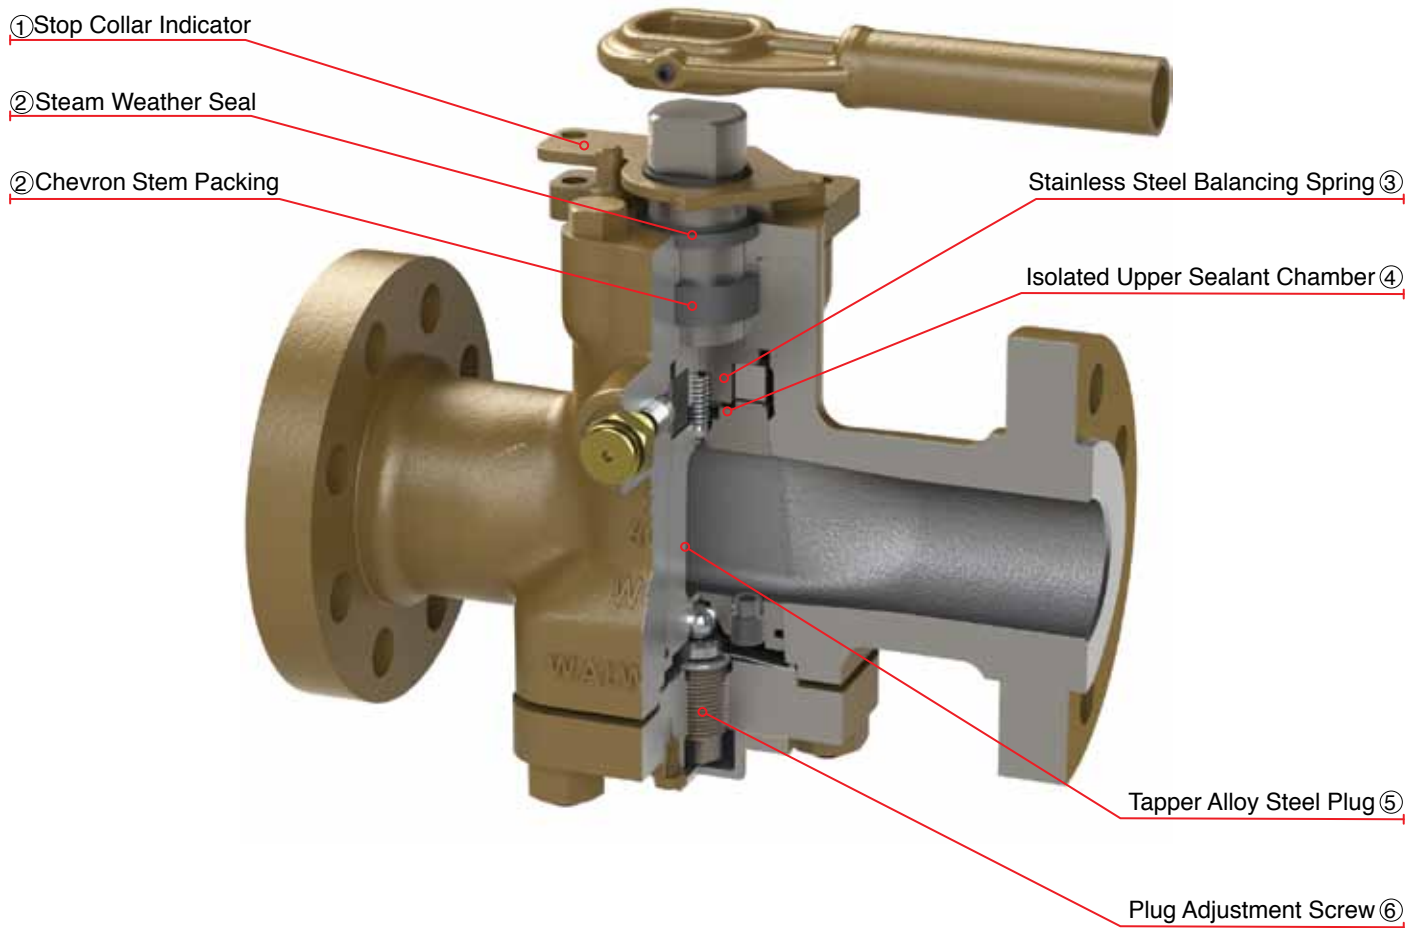

Design Features

- ① Open/Close Indicator - quarter turn stop collar also functions as an indicator of the plug's position.
- ② Stem Sealing System - the stem is protected two ways. The weather seal protects it from external attack. High temperature soft packing protects the stem against internal leakage.
- ③ Balancing Spring - the mechanical spring type Stainless steel 304 is under compression and holds the plug in an equalized pressure position, thus eliminating the possibility of plug taper lock.
- ④ Isolated Sealant Chamber - the sealant's function is to provide a backup to the positively biased surface between the plug and the body.
- ⑤ Plug - the mechanically balanced plug has a permanently bonded PERFLO coating for a very low coefficient of friction. Operating torque remains low over the 4,000 cycle test life of the valve.
- ⑥ Plug Adjustment - the steel plug is mechanically loaded into the body to put tension on the balance spring and is then adjusted for optimum balance and performance. The adjustment screw is covered to prevent tampering and possible misadjustment.

*End to End Dimension as per ASME B16.10 to meet Regular Pattern Length


COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 150 (WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel

*Not Shown

(1) Valves from 1/2" to 1 1/2" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6

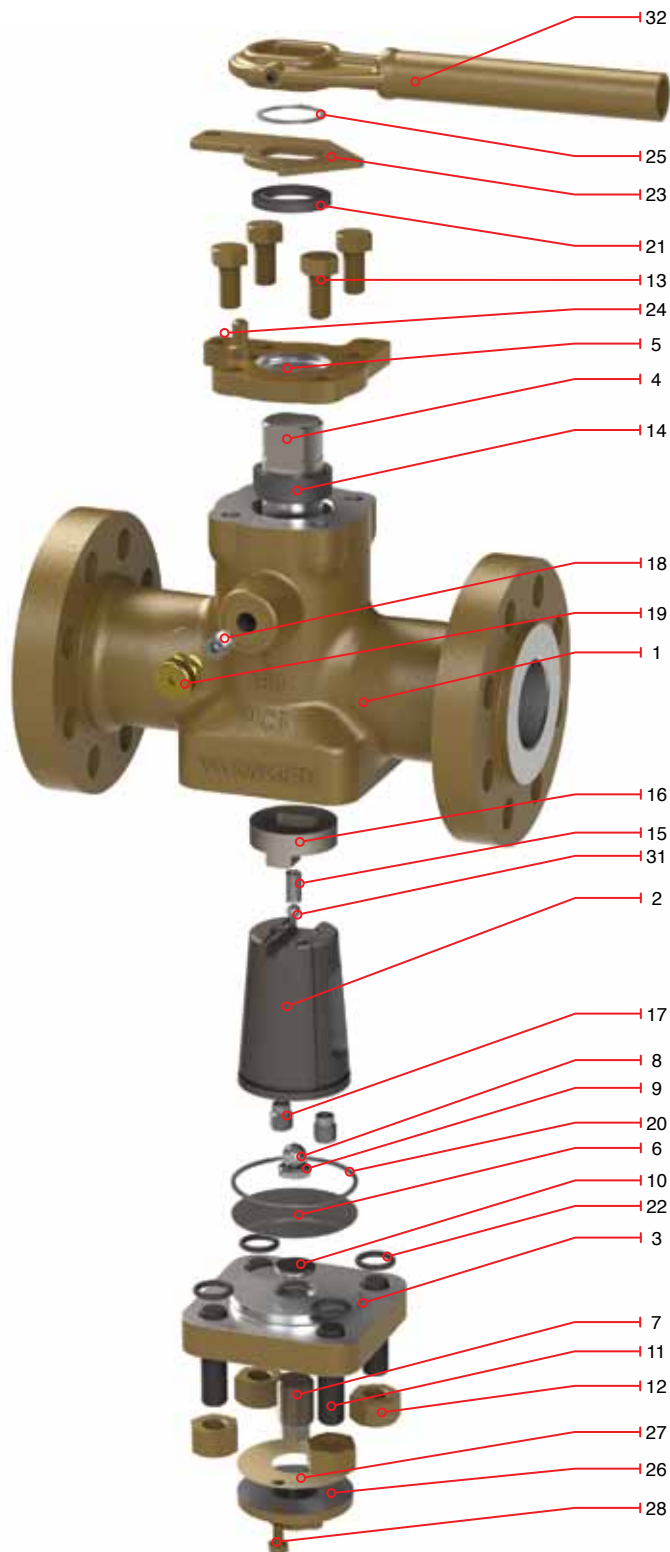



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 150

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
1512	Wrench	RF
1514	Wrench	WE

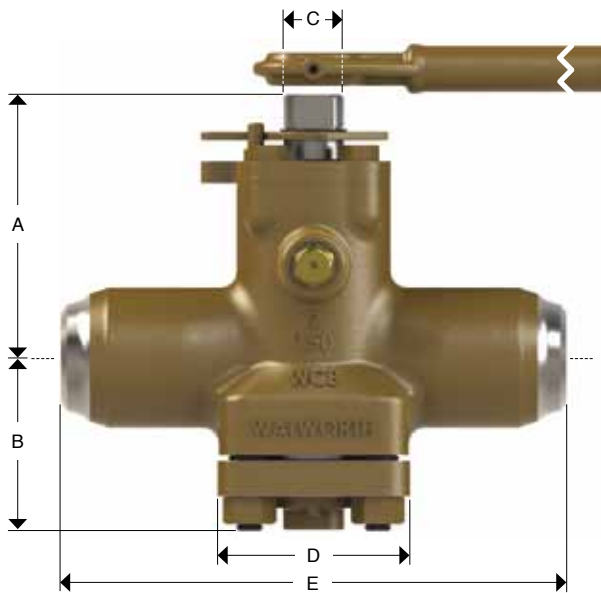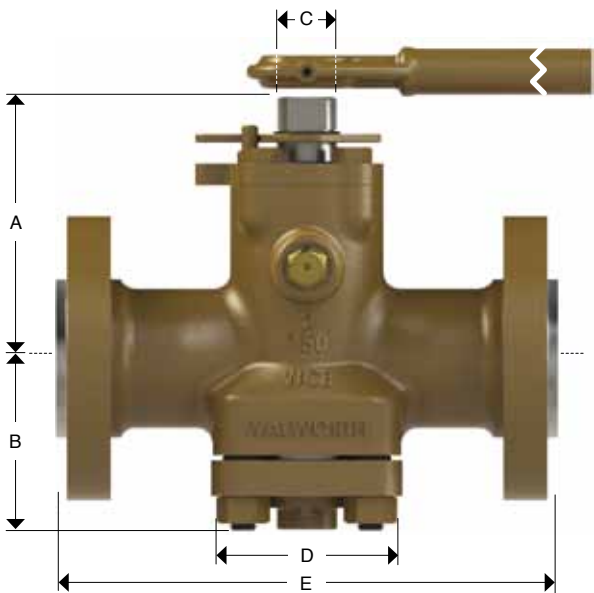

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ								
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
2	50	5.9	150	3.78	96	1.37	35	4.125	105	-	-	-	-	-	-	19	42	-	-	IB-2
3	76	6.84	174	4.53	115	1.37	35	4.62	117	-	-	-	-	-	-	30	66	-	-	IB-2
4	100	7.37	187	5.05	128	1.37	35	5.25	133	-	-	-	-	-	-	35	77	31	68	IB-2
6	150	9.51	242	6.25	159	1.99	51	8.12	206	15.5	394	16	406	-	-	64	141	45	99	IB-3
8	200	11.75	298	9	229	1.99	51	9.75	248	18	457	18.5	470	-	-	89	196	70	154	IB-3


COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 150 (GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB.

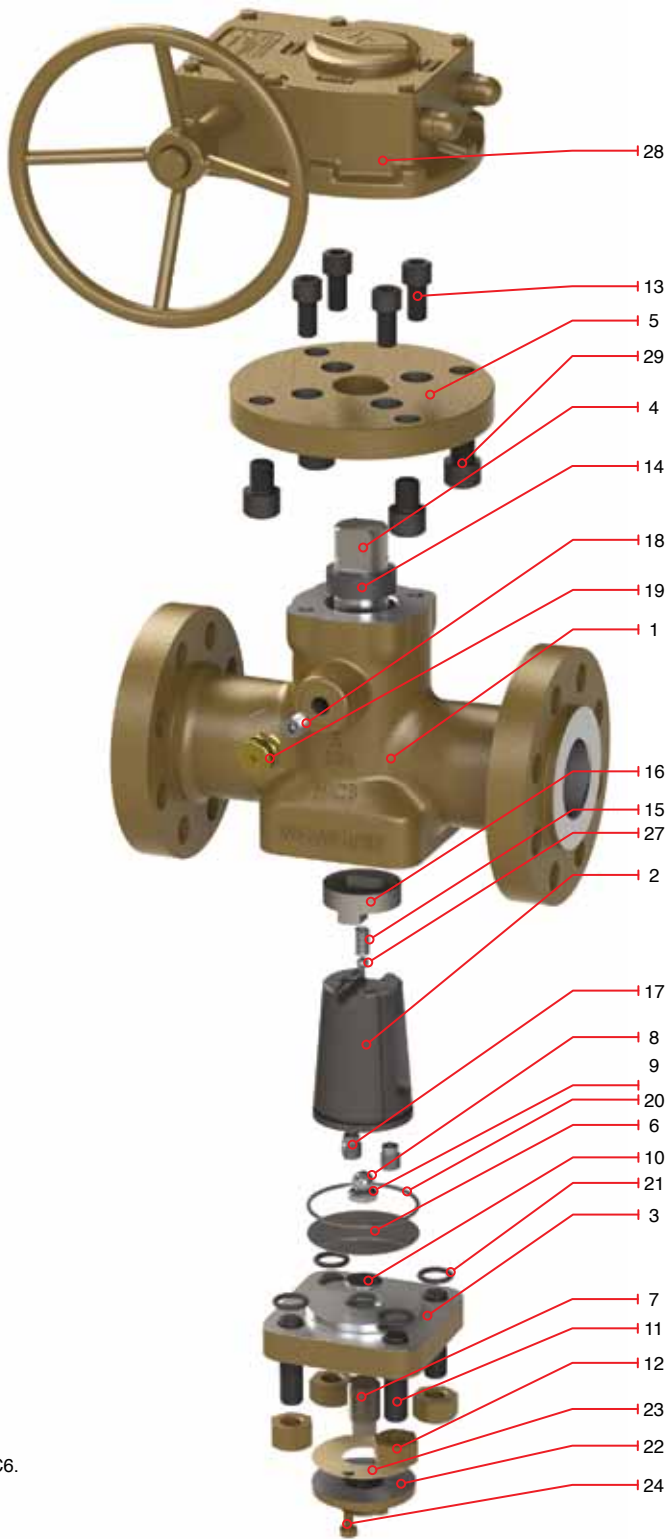



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 150

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
1522	Gear operator	RF
1524	Gear operator	WE

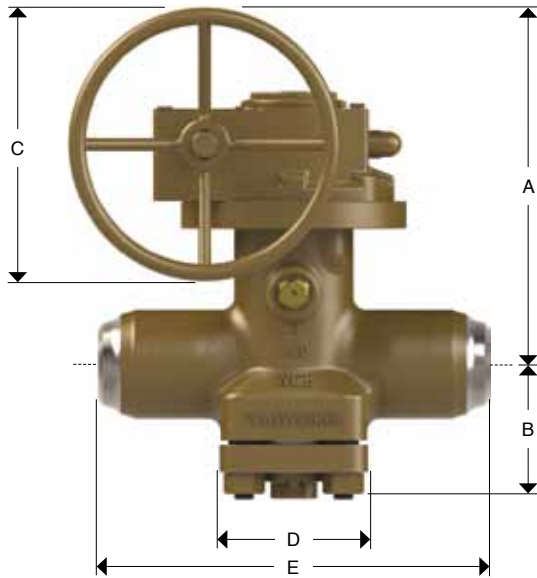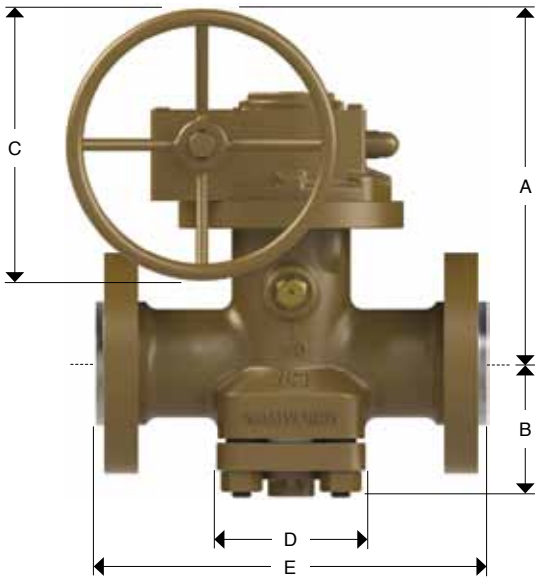


Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
4	100	10.18	259	5.05	128	12	305	5.25	133	-	-	-	-	-	-	77	169	54	119
6	150	11.4	290	6.38	162	20	508	8.12	206	15.5	394	16	406	-	-	101	222	65	143
8	200	13.11	333	9	229	20	508	9.75	248	18	457	15.5	475	-	-	133	293	87	191
10	250	14.83	377	9.5	241	20	508	11.5	292	21	533	21.5	546	-	-	209	460	170	374
12	300	16.5	419	11.69	297	20	508	12	305	24	610	24.3	622	-	-	314	691	190	418

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 300 (WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel

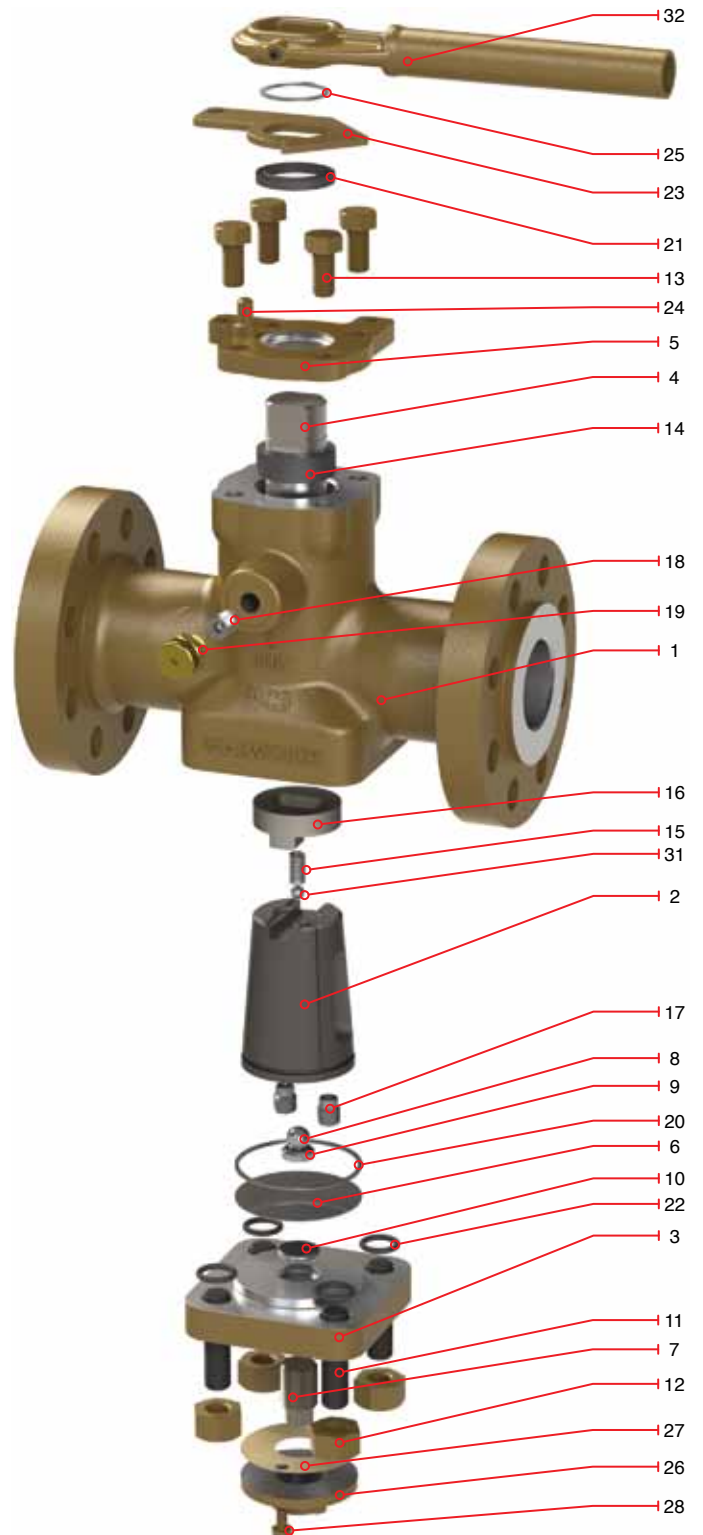

*Not Shown

(1) Valves from 1/4" to 1 1/4" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 300

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
3512	Wrench	RF
3513	Wrench	RTJ
3514	Wrench	WE

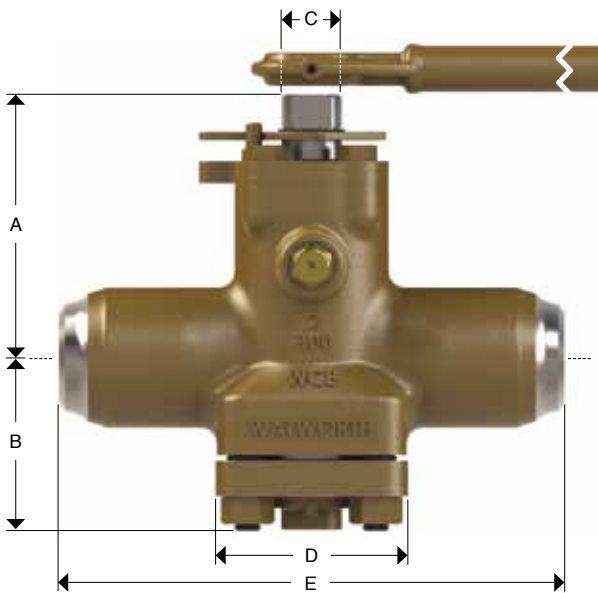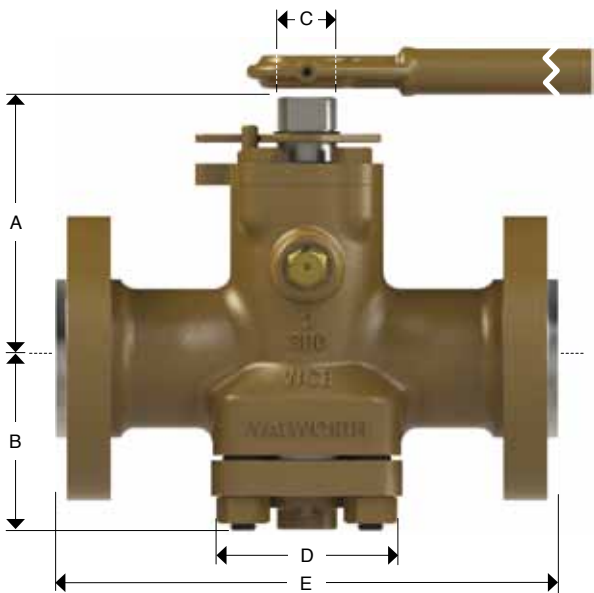

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ								
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
2	50	4.5	114	3.78	96	1.37	35	4.37	111	-	-	-	-	-	-	26	57	21	46	IB-2
3	76	6.84	174	4.41	112	1.37	35	4.62	117	-	-	-	-	-	-	46	101	38	84	IB-2
4	100	7.37	187	5.05	128	1.37	35	5.25	133	-	-	-	-	-	-	54	119	45	99	IB-2
6	150	9.51	242	6.38	162	1.99	51	8.12	206	15.87	403	16.5	419	-	-	119	262	99	218	IB-3
8	200	11.72	298	9.19	233	1.99	51	9.75	248	19.75	502	20.37	518	-	-	195	429	162	356	IB-3

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 300


(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB.

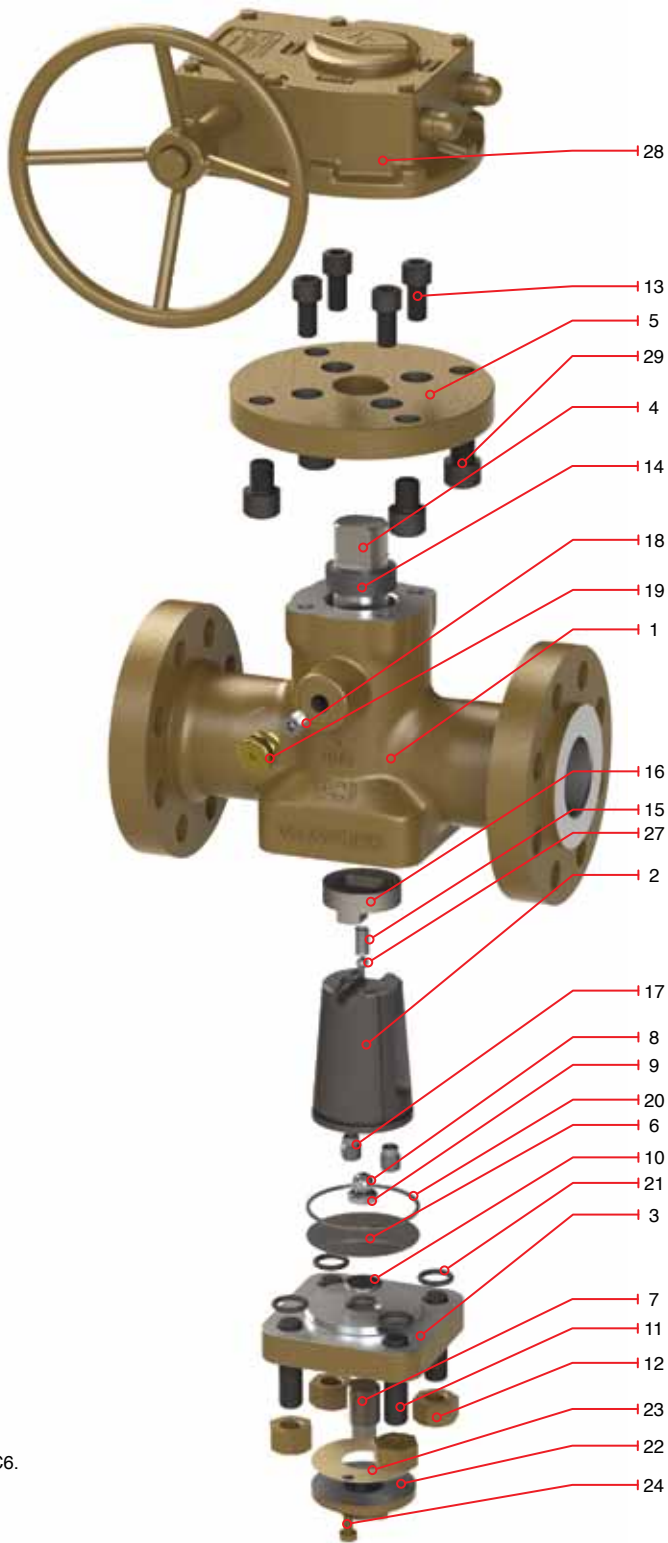



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 300

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
3522	Gear operator	RF
3523	Gear operator	RTJ
3524	Gear operator	WE

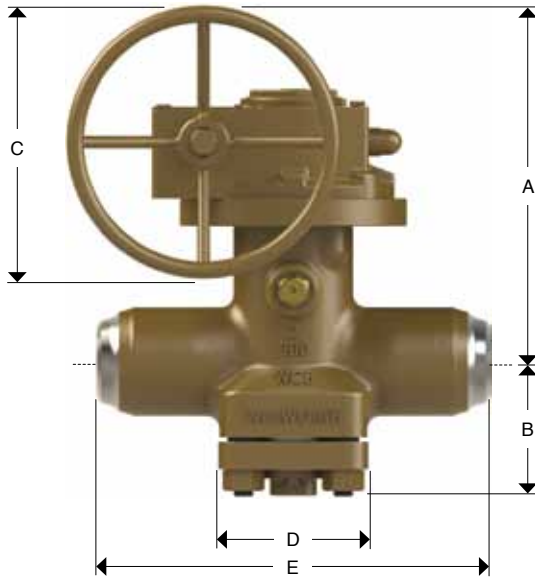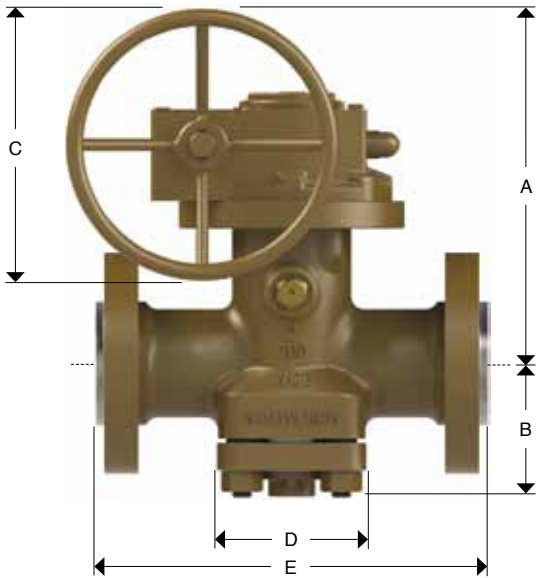

Dimensions and Weights


Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
2	50	8.43	214	3.78	96	12	305	4.37	111	-	-	-	-	-	-	33	73	27	59
3	76	9.84	250	5.09	129	12	305	5	127	-	-	-	-	-	-	69	152	59	130
4	100	10.01	254	5.06	129	12	305	5.75	146	-	-	-	-	-	-	100	220	75	165
6	150	11.6	295	7.63	194	20	508	9.63	245	-	-	-	-	-	-	200	440	150	330
8	200	14.62	371	9.82	249	30	762	10.75	273	15.87	403	16.5	419	-	-	321	706	255	561
10	250	17.03	433	12.31	313	30	762	15.62	397	19.75	502	20.37	518	-	-	545	1199	410	902
12	300	18.04	458	14.19	360	30	762	15	381	22.37	568	23	584	-	-	820	1804	615	1353

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 600

(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel

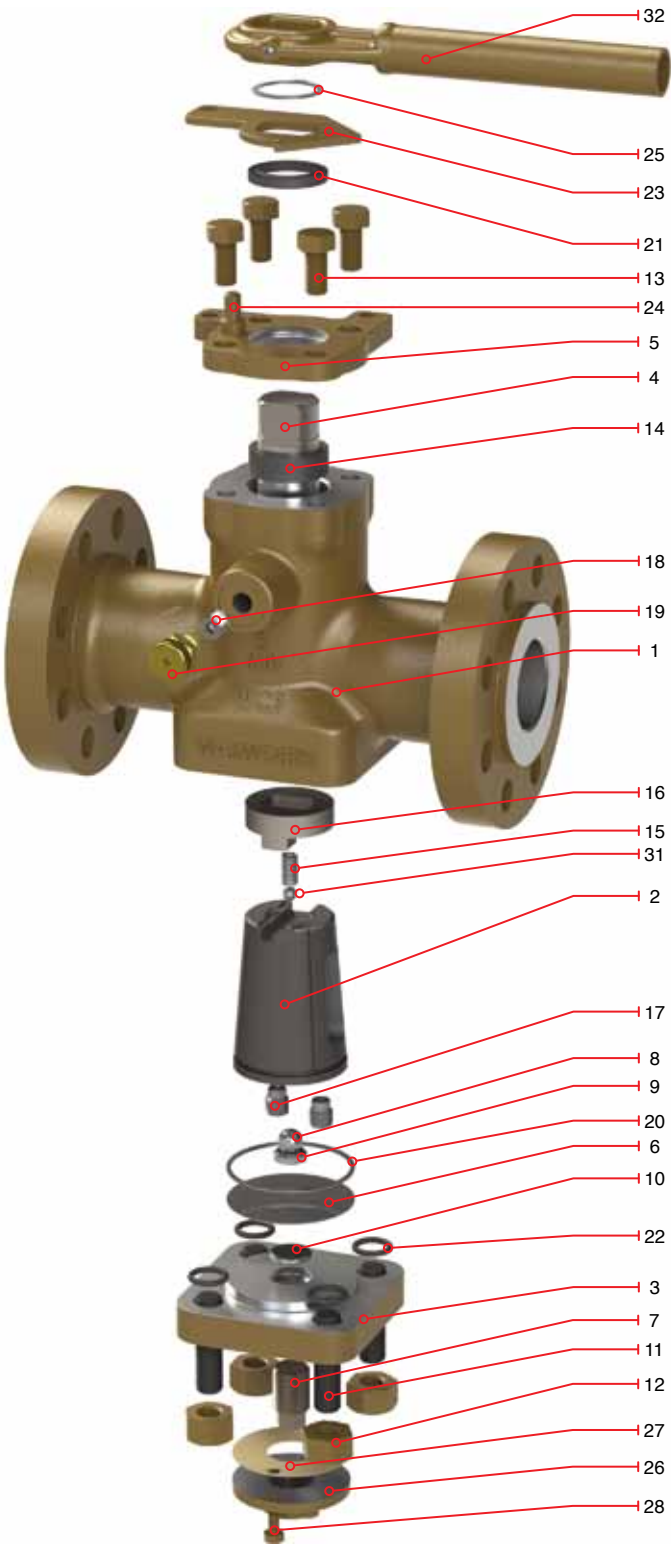

*Not Shown
(1) Valves from 1/2" to 1 1/2" classes from 150 to 1500 with A216 Gr. 60-40-18 or A395 Gr. WCB



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 600

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions conform to ANSI/ASME B1.20.1
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
6511	Wrench	THREADED
6512	Wrench	RF
6513	Wrench	RTJ
6514	Wrench	WE

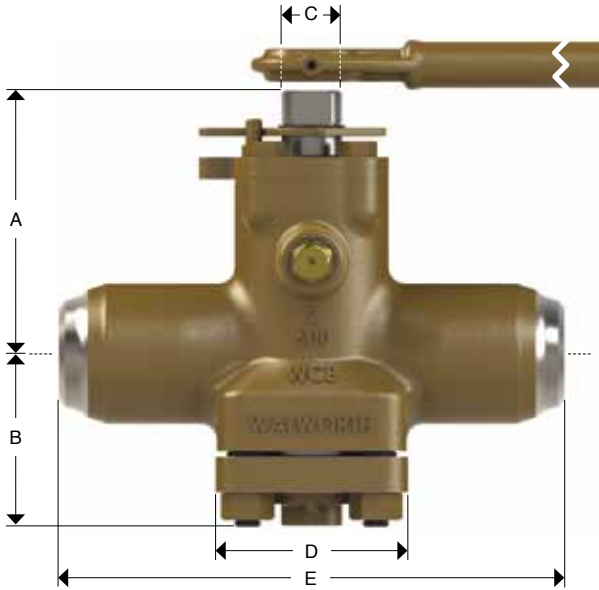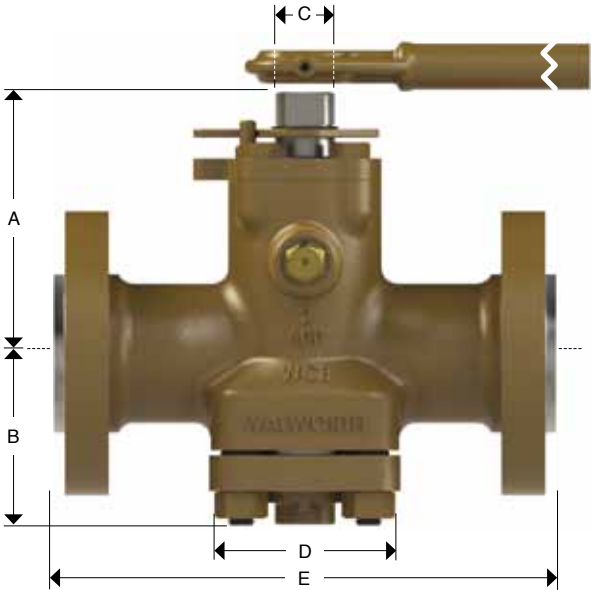

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions								Approx Weight						Wrench No.
										E								RF/RTJ		WE		THREDADED		
		A		B		C		D		RF		RTJ		THREDADED		WE								
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	Kg	lb	
1	25	4.5	114	2.78	71	0.74	19	3.62	92	-	-	-	-	-	-	-	-	10	22	7	15	7	15	IB-0
1 1/2	40	5.06	129	3.37	86	1	25	4	102	-	-	-	-	-	-	-	-	17	37	12	26	12	26	IB-1
2	50	5.98	152	3.78	96	1.37	35	4.37	111	11.5	292	11.62	295	7.75	197	11.5	292	24	53	18	40	18	40	IB-2
3	76	6.84	174	5.09	129	1.37	35	5	127	14	356	14.12	359	10	254	14	356	40	88	29	64	29	64	IB-2
4	100	7.37	187	5.88	149	1.37	35	5.75	146	17	432	17.12	435	11.5	292	17	432	70	154	50	110	50	110	IB-2
6	150	9.65	245	7.63	194	1.99	51	9.62	244	22	559	22.12	562	-	-	22	559	172	378	-	-	118	260	IB-3

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 600


(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB.

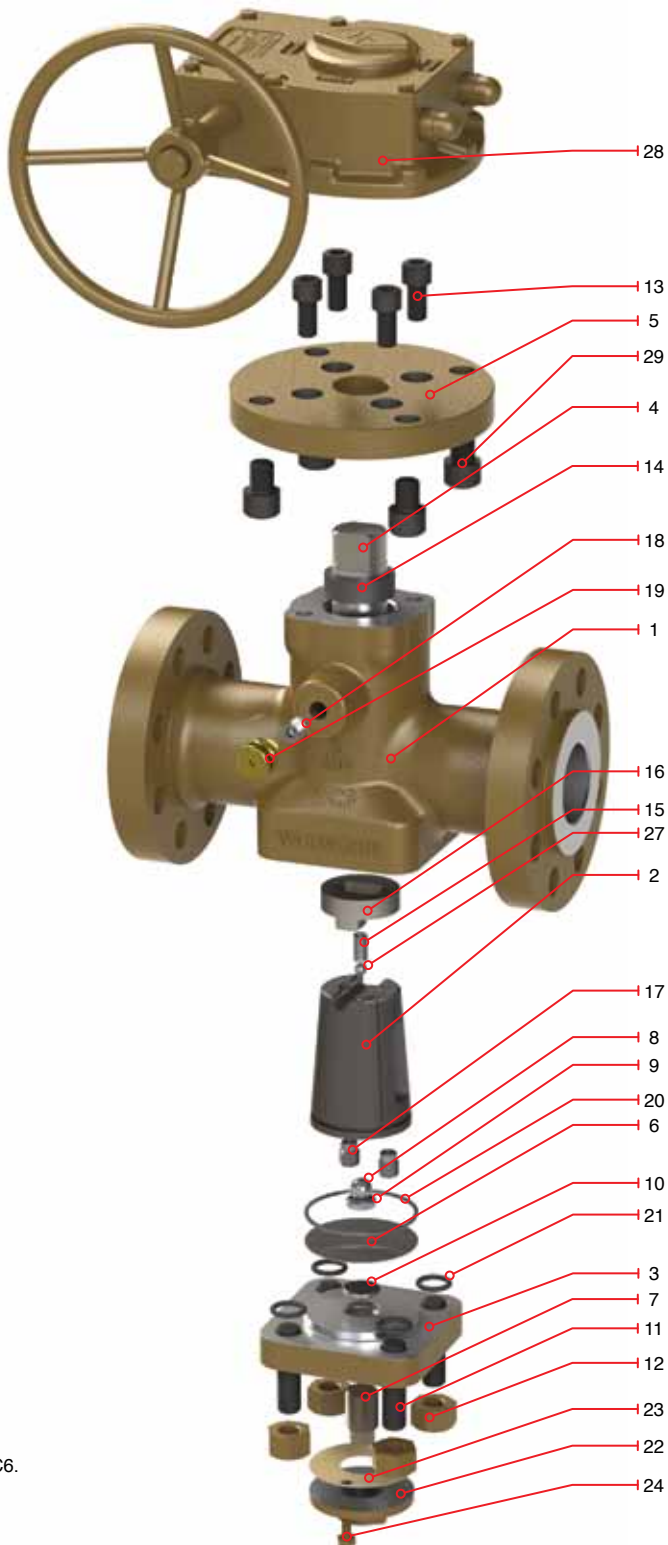



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 600

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
6522	Gear operator	RF
6523	Gear operator	RTJ
6524	Gear operator	WE

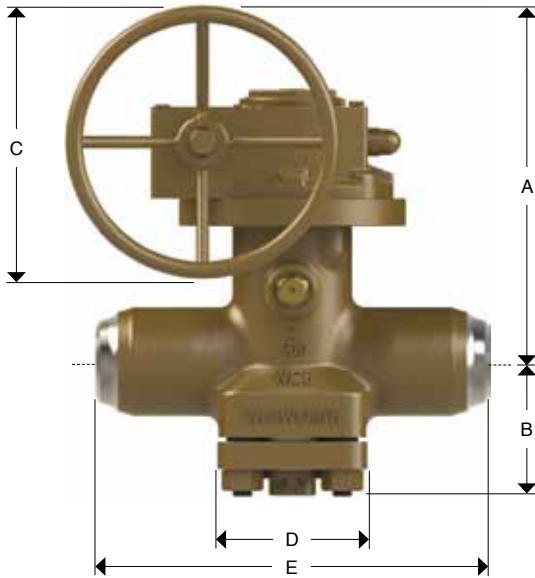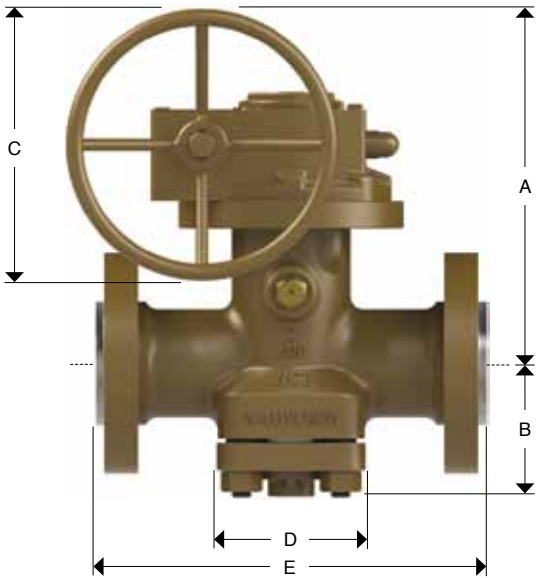


Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
2	50	8.43	214	3.78	96	12	305	4.37	111	11.5	292	11.62	295	11.5	292	33	73	27	59
3	76	9.84	250	5.09	129	12	305	5	127	14	356	14.12	359	14	356	69	152	59	130
4	100	10.01	254	5.06	129	12	305	5.75	146	17	432	17.12	435	17	432	100	220	75	165
6	150	11.6	295	7.63	194	20	508	9.63	245	22	559	22.12	562	22	559	200	440	150	330
8	200	14.62	371	9.82	249	30	762	10.75	273	26	660	26.12	664	26	660	321	706	255	561
10	250	17.03	433	12.31	313	30	762	15.62	397	31	787	31.12	791	31	787	545	1199	410	902
12	300	18.04	458	14.19	360	30	762	15	381	-	-	-	-	-	-	820	1804	615	1353

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 900 (WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel

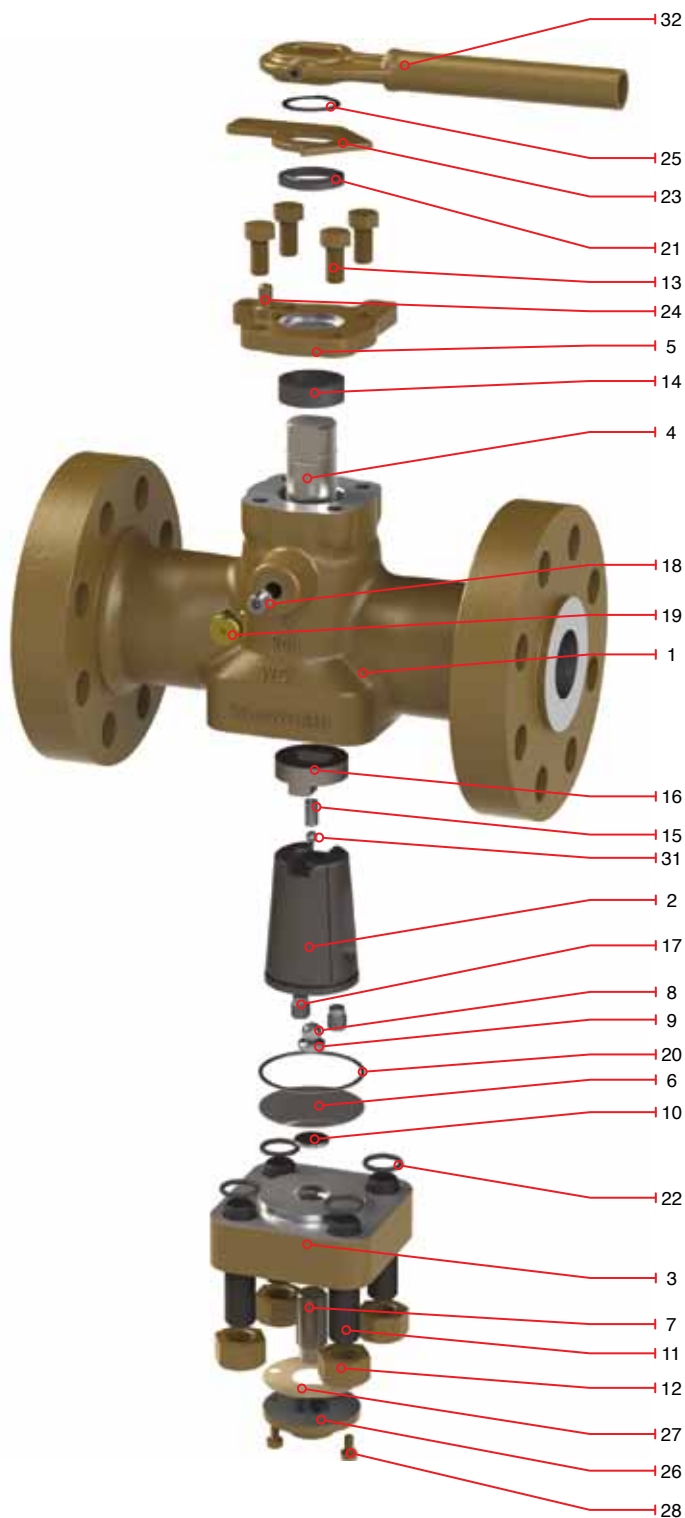

*Not Shown



(1) Valves from 1/2" to 1 1/2" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 900 (WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions to conform to ANSI/ASME B 1.20.1
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
9511	Wrench	THREADED
9512	Wrench	RF
9513	Wrench	RTJ
9514	Wrench	WE

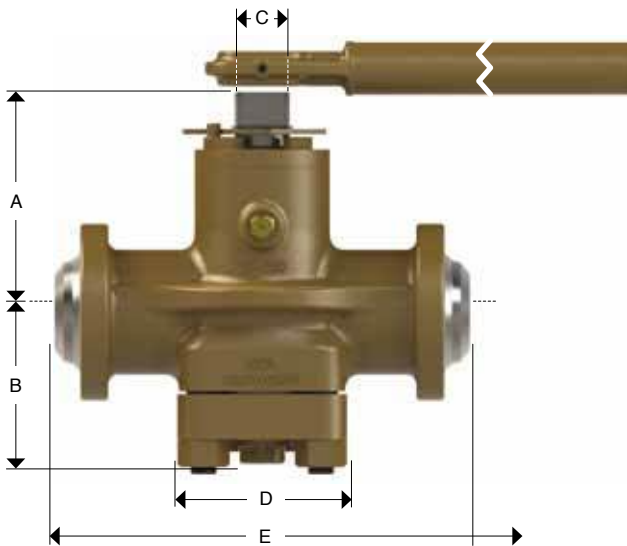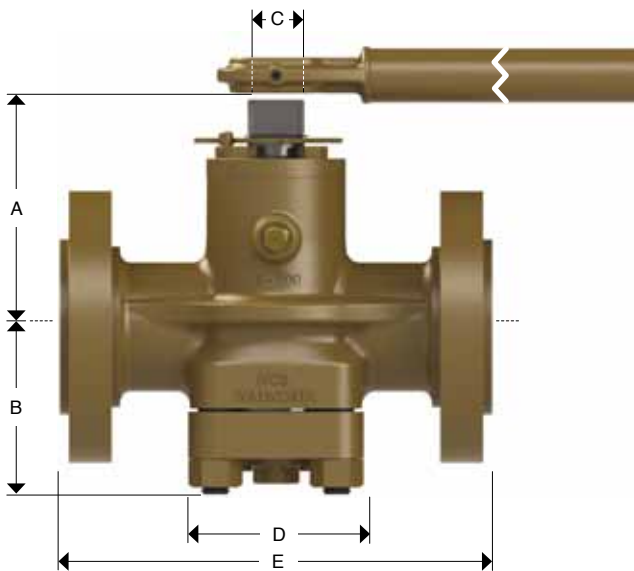

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions								Approx Weight						Wrench No.
										E								RF/RTJ		WE		THREDADED		
		A		B		C		D		RF		RTJ		THREDADED		WE								
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	Kg	lb	
2	50	6	152	3.91	99	1.37	35	4.75	121	14.5	368	14.62	371	7.75	197	-	-	41	90	31	68	31	68	IB-2
3	76	7.93	201	5.09	129	2	51	6.12	155	15	381	15.12	384	10	254	15	381	65	143	55	121	55	121	IB-3
4	100	8.65	220	6.19	157	2	51	8.5	216	18	457	18.12	460	11.5	292	18	457	104	229	90	198	90	198	IB-3

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 900


(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB.

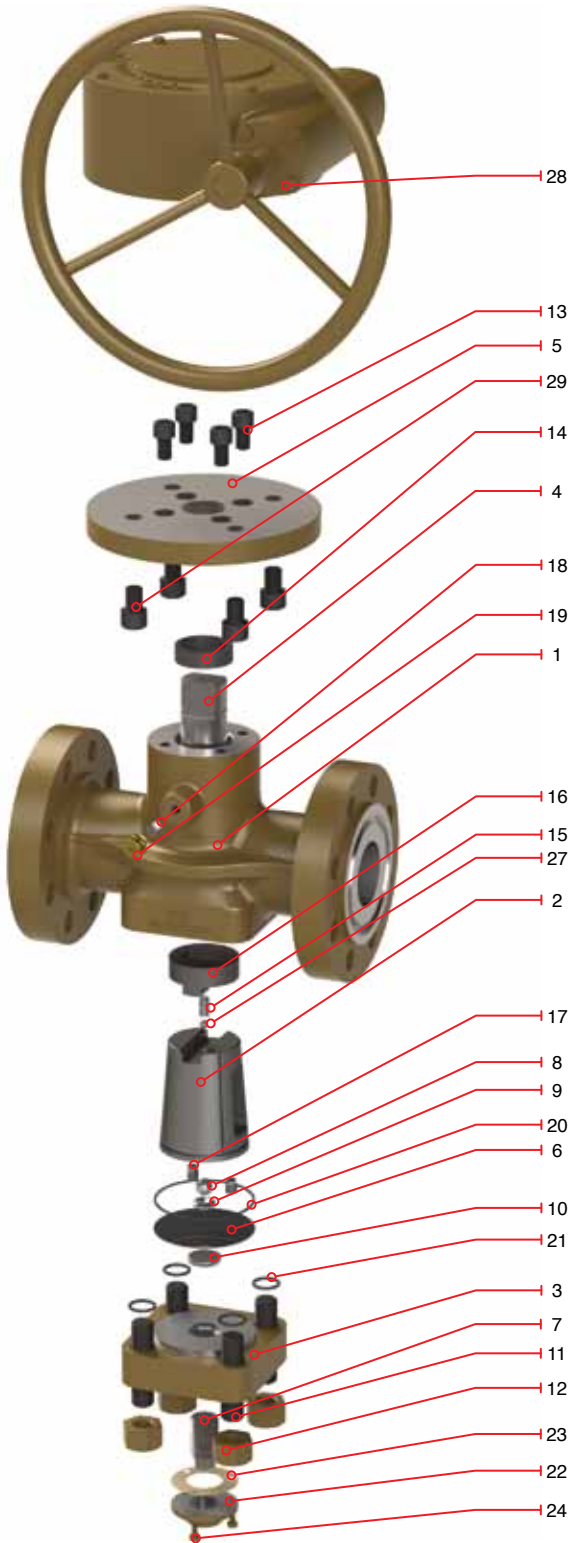



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 900

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
9522	Gear operator	RF
9523	Gear operator	RTJ
9524	Gear operator	WE

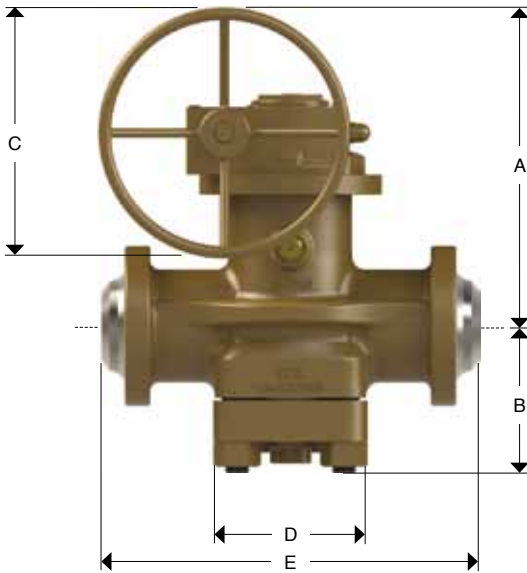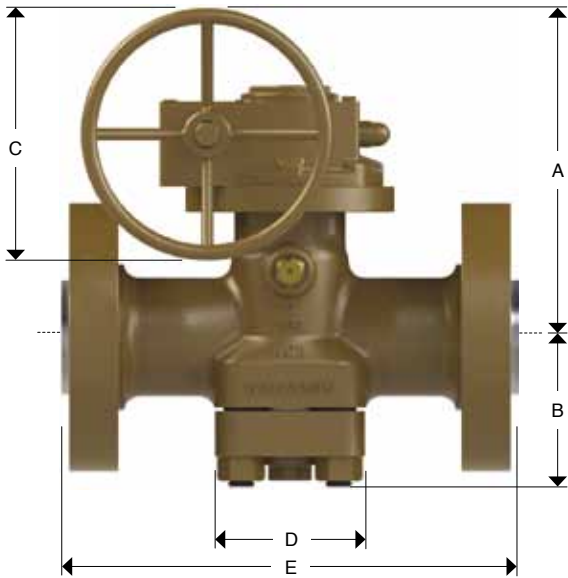

Dimensions and Weights


Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
3	76	11.69	297	5.09	129	20	508	6.13	156	15	381	15.12	384	15	381	92	202	70	154
4	100	12.44	316	6.19	157	20	508	8.5	216	18	457	18.12	460	18	457	132	290	100	220
6	150	15.15	385	9	229	20	508	10	254	24	610	24.12	613	24	610	150	330	190	418
8	200	16.37	416	9.75	248	30	762	13	330	29	737	29.12	740	29	737	464	1021	350	770
10	254	19.37	492	11.37	289	20	508	15.62	397	33	838	33.12	841	33	838	625	1375	470	1034

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 1500

(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel

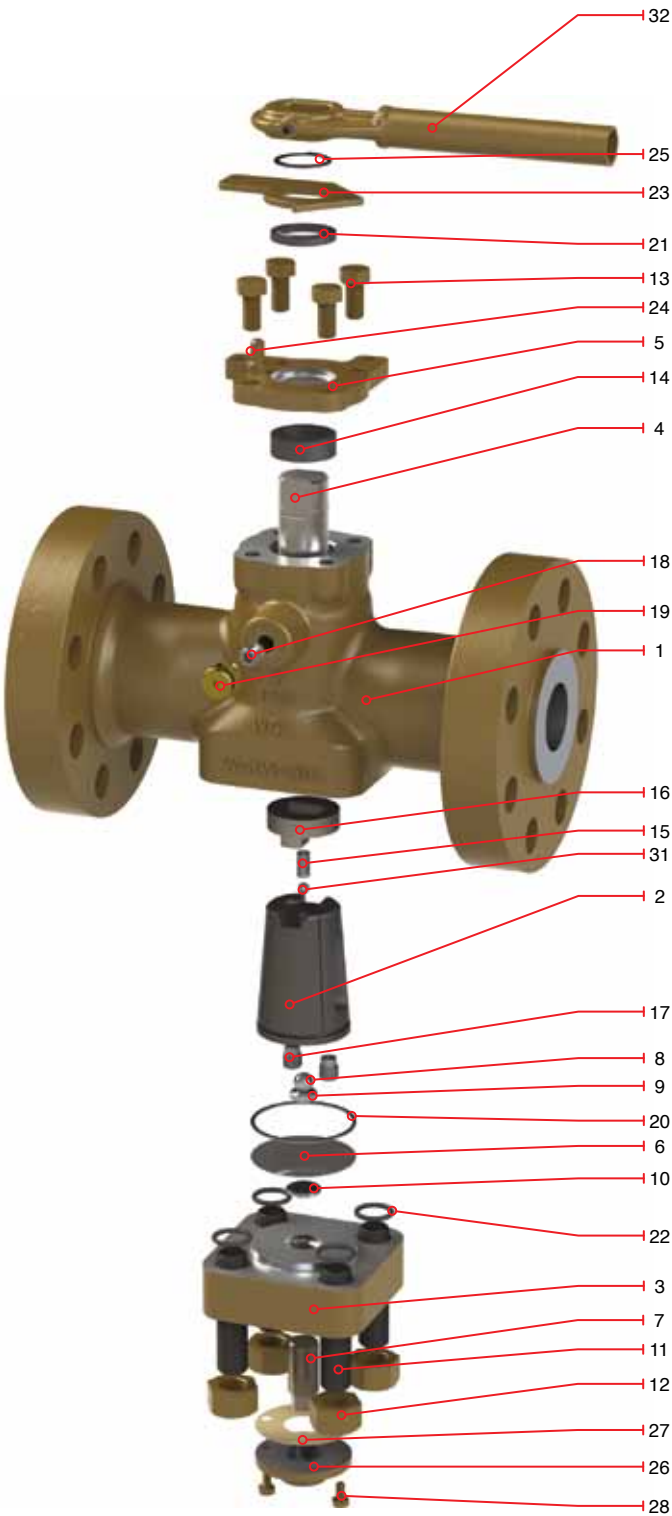

*Not Shown
(1) Valves from 1/2" to 1 1/2" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 1500

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions conform to ANSI/ASME B1.20.1
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
5511	Wrench	THREADED
5512	Wrench	RF
5513	Wrench	RTJ
5514	Wrench	WE

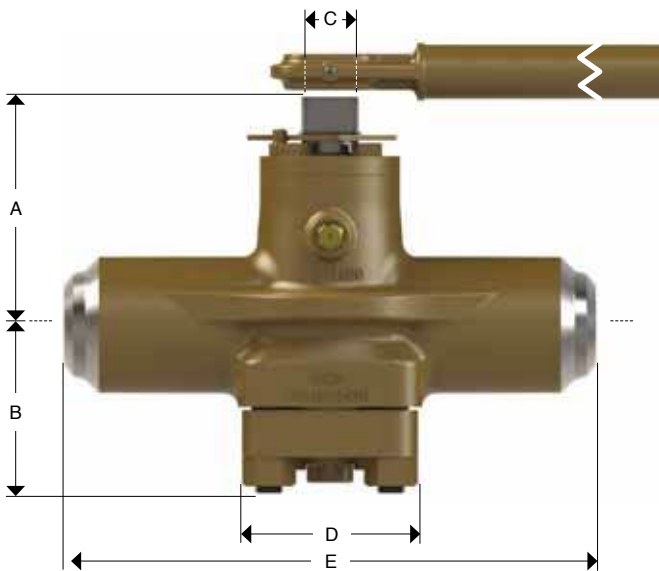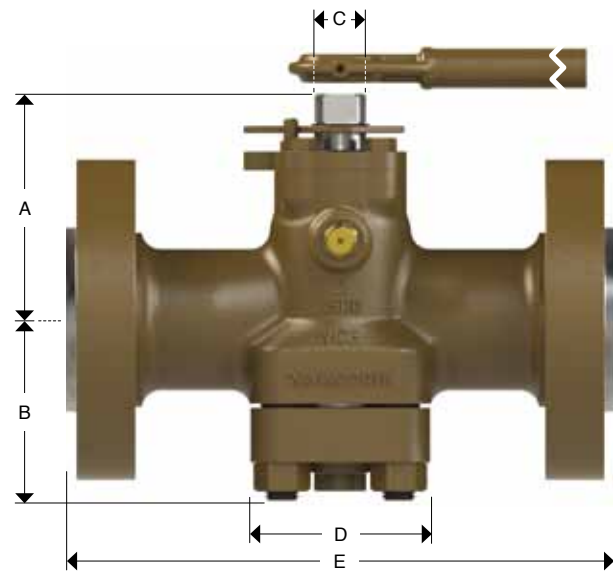

Dimensions and Weights


Nominal Size		General Dimensions								End to End Dimensions								Approx Weight						Wrench No.
										E								RF/RTJ		WE		THREADED		
		A		B		C		D		RF		RTJ		THREADED										
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	Kg	lb	
1/2	15	4.24	108	2.42	61	0.74	19	3.43	87	-	-	-	-	4.5	114	-	-	-	-	5	11	-	-	IB-0
3/4	20	4.24	108	2.42	61	0.74	19	3.43	87	-	-	-	-	4.5	114	-	-	-	-	5	11	-	-	IB-0
1	25	4.5	114	2.78	71	0.74	19	3.87	98	-	-	-	-	5	127	-	-	14	10	10	22	-	-	IB-0
2	50	5.06	129	3.5	89	1	25	4.25	108	14.5	368	14.62	371	6.69	170	14.5	368	25	17	17	37	-	-	IB-1
3	76	5.98	152	3.91	99	1.37	35	4.75	121	18.5	470	18.62	473	7.75	197	18.5	470	41	31	31	68	31	68	IB-2
4	100	7.93	201	5.09	129	1.99	51	6.37	162	21.5	546	21.62	549	10	254	21.5	546	89	67	67	147	67	147	IB-3
6	150	8.56	217	6.19	157	1.99	51	8.5	216	27.75	705	30	711	11.5	292	27.75	705	133	100	100	220	100	220	IB-3

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 1500

(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5
30	Packing Injector	Carbon Steel

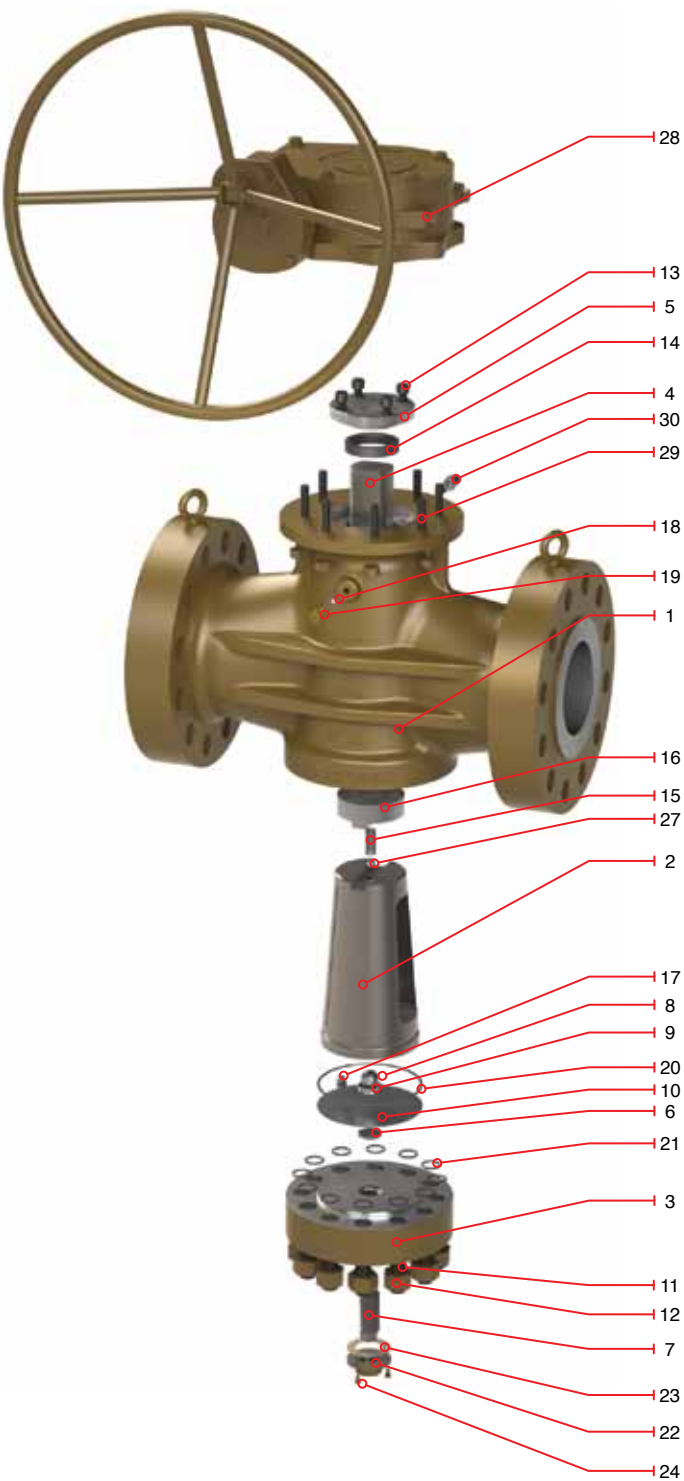

*Not Shown
(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WCB.



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 1500

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
5522	Gear operator	RF
5523	Gear operator	RTJ
5524	Gear operator	WE

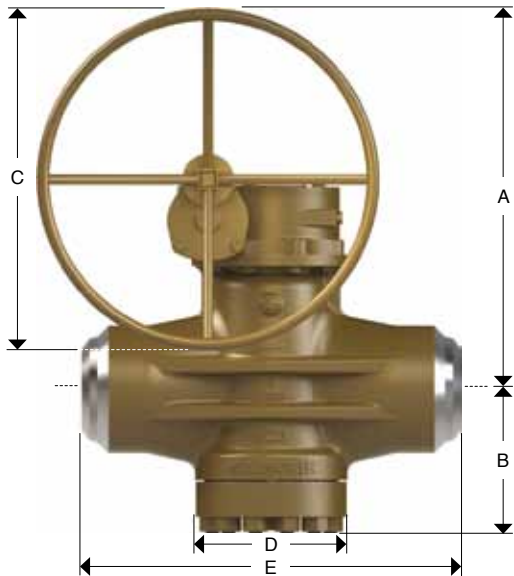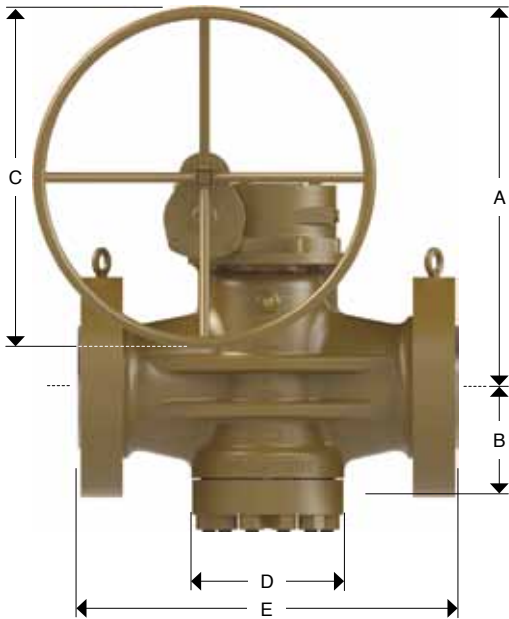

Dimensions and Weights


Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
2	50	10.41	264	3.91	99	12	305	4.75	121	14.5	368	14.62	371	-	-	69	152	52	114
3	76	13.96	355	8.71	221	20	508	6.37	162	18.5	470	18.62	473	18.5	470	110	242	80	176
4	100	12.44	316	6.19	157	20	508	8.5	216	21.5	546	21.62	549	21.5	546	160	352	127	279
6	150	15.29	388	8.25	210	30	762	10.75	273	27.75	705	28	711	27.75	705	384	845	290	638
8	200	21.62	549	11.5	292	20	508	13	330	32.75	832	33.12	841	32.75	832	755	1661	565	1243
10	250	20.53	521	15.56	395	30	762	13	330	39	991	39.37	1000	39	991	1682	3700	1465	3223

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 2500

(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Spring Ball	A295 Type 52100
32	Wrench	Carbon Steel
33	Packing Injector	Carbon Steel

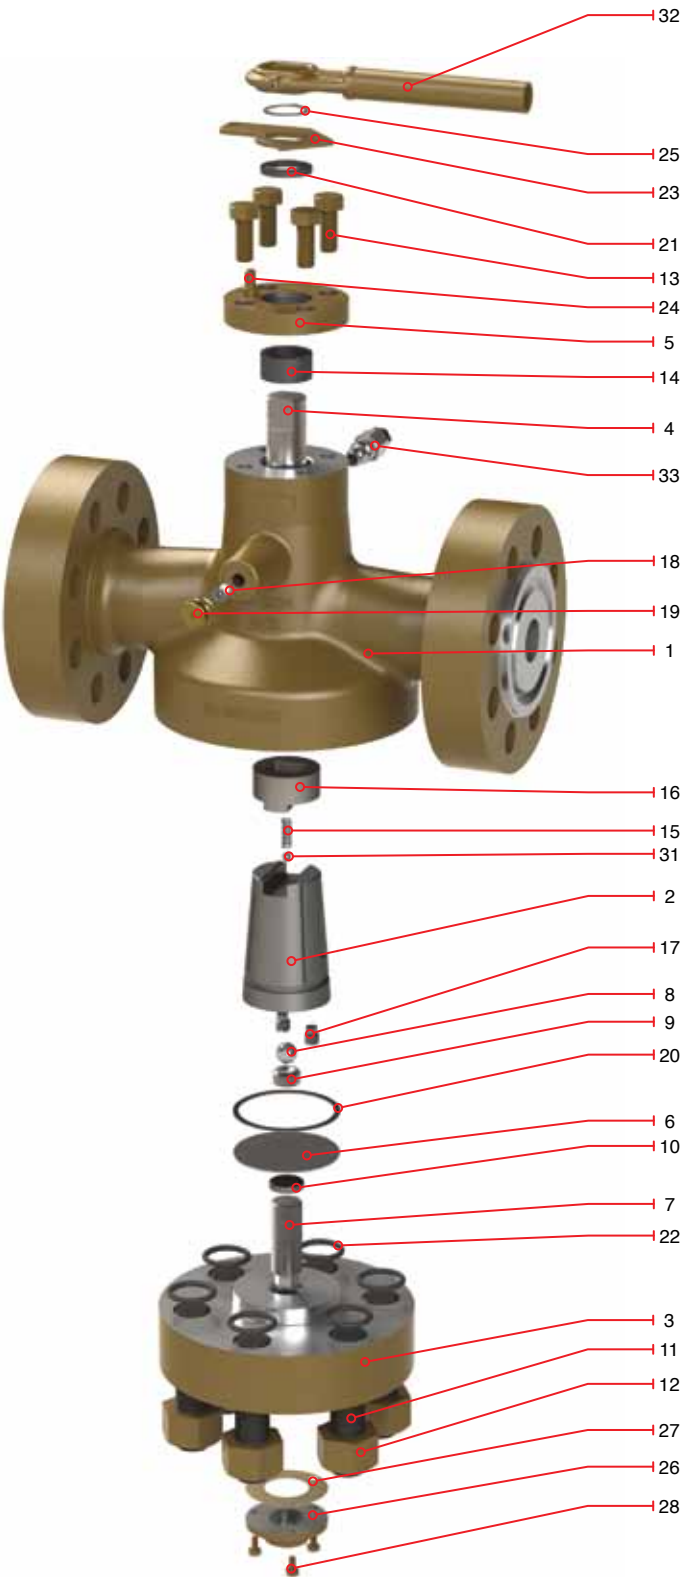



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 2500

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions conform to ANSI/ASME B 1.20.1
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
2511	Wrench	THREADED
2512	Wrench	RF
2513	Wrench	RTJ
2514	Wrench	WE

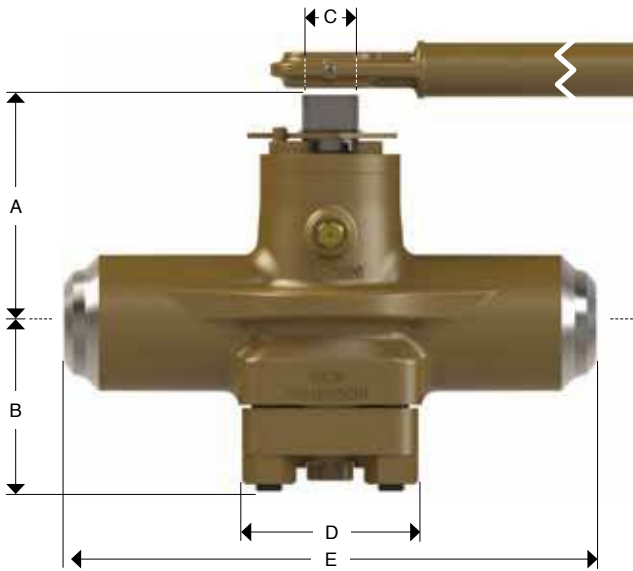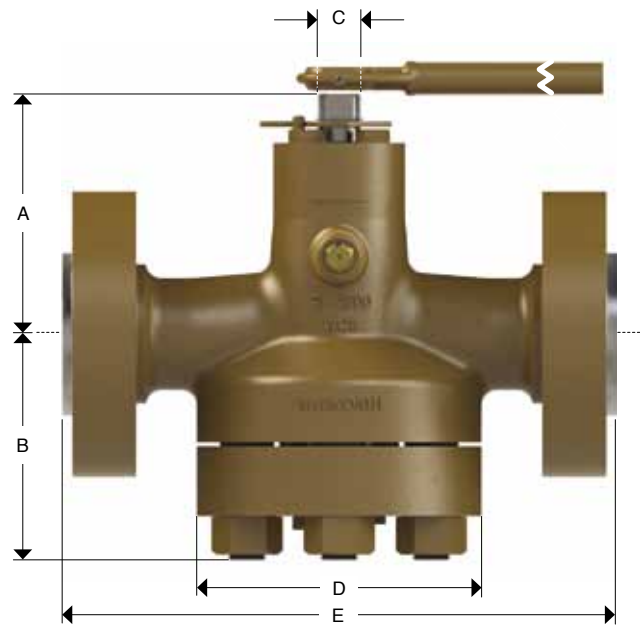

Dimensions and Weights


Nominal Size		General Dimensions								End to End Dimensions								Approx Weight						Wrench No.
										E								RF/RTJ		WE		THREADED		
		A		B		C		D		RF		RTJ												
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	Kg	lb	
1/2	15	5.7	145	3.9	99	0.85	22	4.6	117	-	-	-	-	5.04	128	-	-	-	-	10	22	-	-	IB-0
3/4	20	5.7	145	3.9	99	0.85	22	4.6	117	-	-	-	-	5.04	128	-	-	-	-	10	22	-	-	IB-0
1	25	5.7	145	3.9	99	0.85	22	4.6	117	-	-	-	-	5.04	128	-	-	23	51	10	22	-	-	IB-0
1 1/2	40	6.6	168	4.8	122	1.09	28	7.15	182	-	-	-	-	-	-	-	-	40	88	-	-	30	66	IB-1
2	50	6.6	168	4.8	122	1.09	28	7.15	182	17.75	451	17.88	454	-	-	-	-	70	154	-	-	53	116	IB-2
3	76	8	203	5.7	145	1.41	36	8.6	218	22.75	578	23	584	-	-	-	-	150	330	-	-	113	248	IB-3
4	100	9.1	231	6.7	170	2.31	59	9.98	253	26.5	673	26.88	683	-	-	-	-	230	506	-	-	173	380	IB-3

COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 2500 (GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Ball	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Ball Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Spring Ball	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5
30	Packing Injector	Carbon Steel

*Not Shown

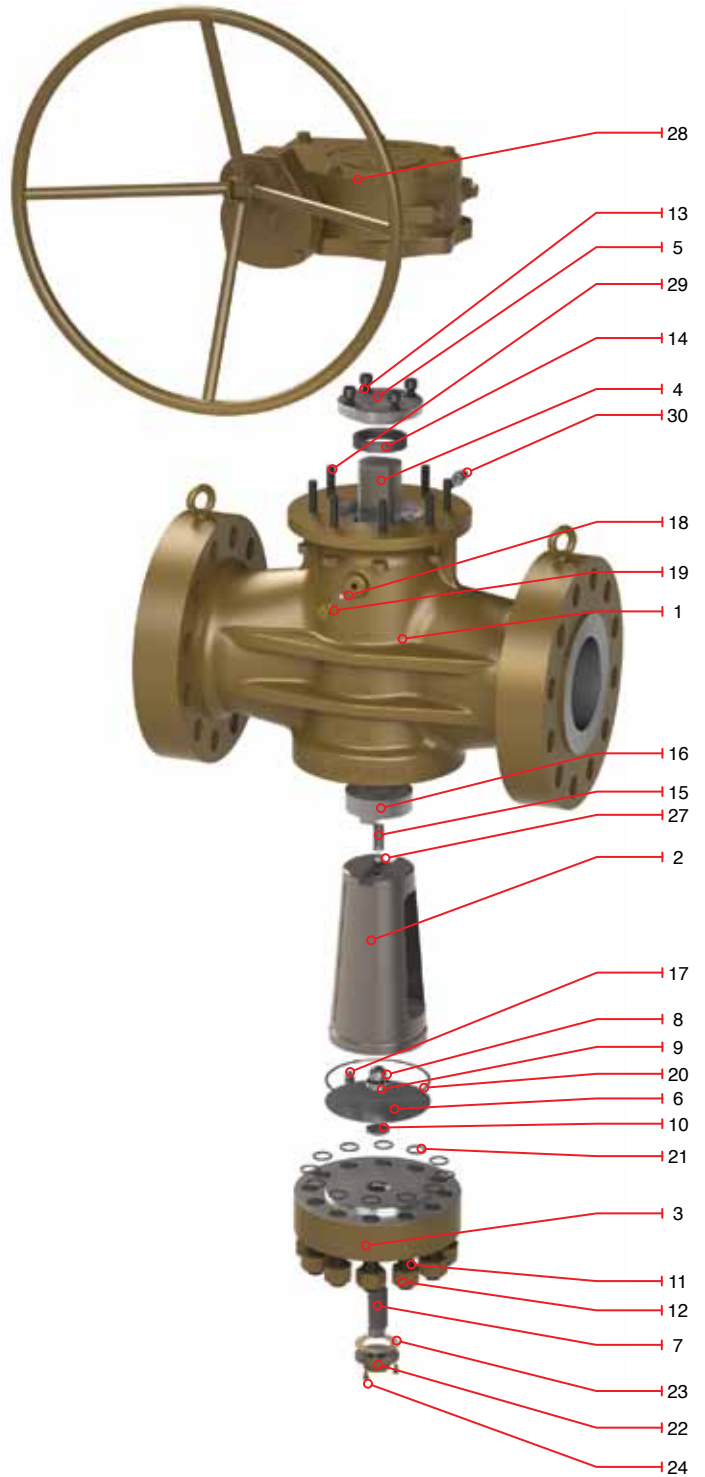



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 2500

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
2522	Gear operator	RF
2523	Gear operator	RTJ
2524	Gear operator	WE

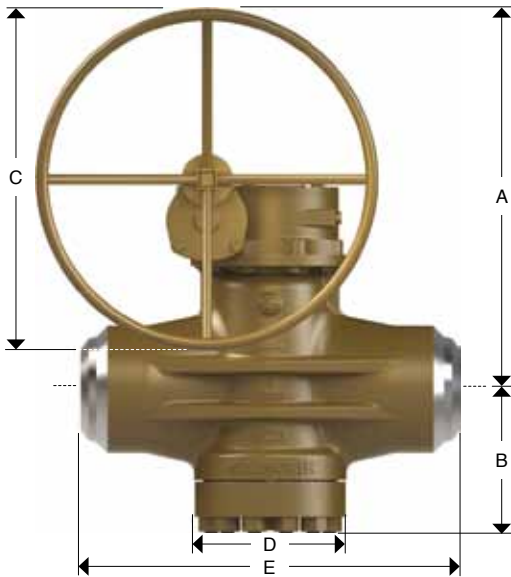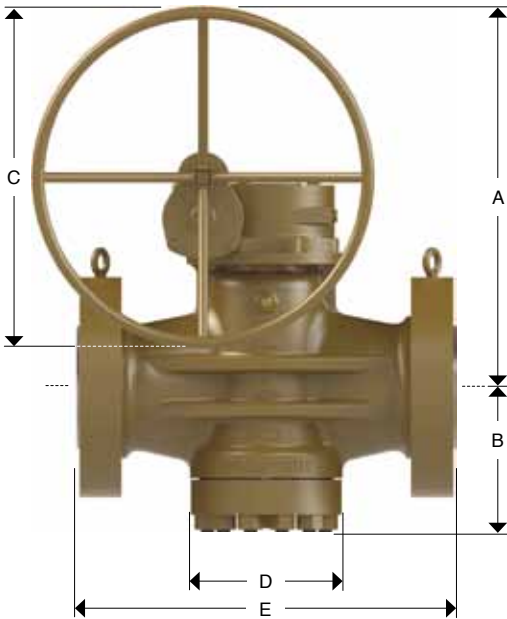

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
6	152	17	432	9.6	244	20	508	13.5	343	36	914	36.5	927	-	-	770	1694	578	1271
8	203	19.5	495	11.8	300	30	762	17.8	452	40.25	1022	40.88	1038	-	-	1013	2229	760	1671