

TOP ENTRY PLUG VALVE SHORT PATTERN CLASS 150


(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	STM A 216 Gr. WCB/ A395 Gr.60-40-18
3	Retainer	Carbon Steel A216 Gr. WCB
4	Gland	Carbon Steel A216 Gr. WCB
5	Retainer Bolting	B7 Alloy Steel Studs
6	Gland Bolting	B7 Alloy Steel Studs
7	Diaphragm	Stainless Steel Type 410
8	Diaphragm Gasket	Non-asbestos composite
9	Packing	Alloy Steel O'ring Retainer Sleeve with Buna-N O'ring
10	Packing Retainer	Steel
11	Plug Check Valve	Steel
12	Sealant Fitting	Steel
13	Stop Collar	Steel
14	Collar Retainer	Steel
15	Wrench	Carbon Steel
16	Spring	Stainless Steel
17	Spring Washer	Steel
18	Seal	Nitrile (Buna-N)
19	Stop Post	Steel
20	Identification Plate*	Stainless Steel 304

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

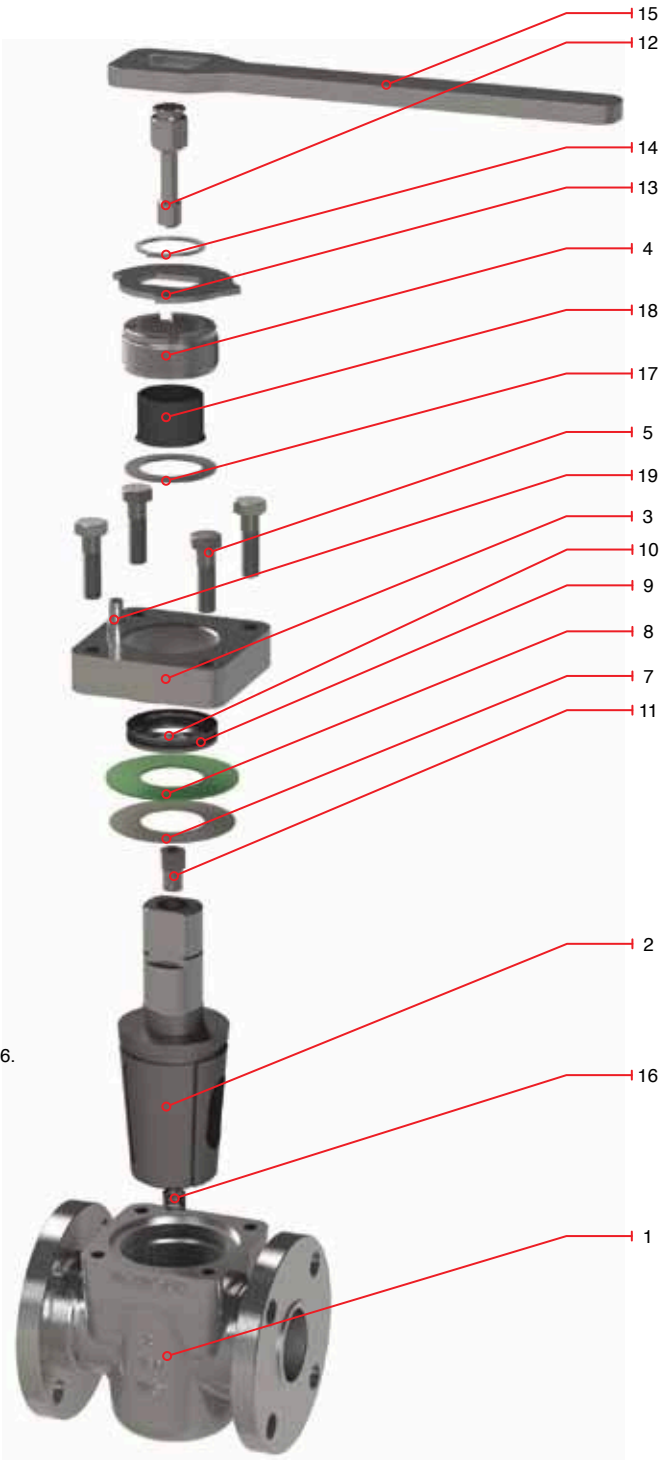



TOP ENTRY PLUG VALVE SHORT PATTERN CLASS 150

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions conform to ANSI/ASME B1.20.1
- Design as per API 6D

Figure no.	Operation	Type of ends
1749F	Wrench	RF
1750	Wrench	THREADED

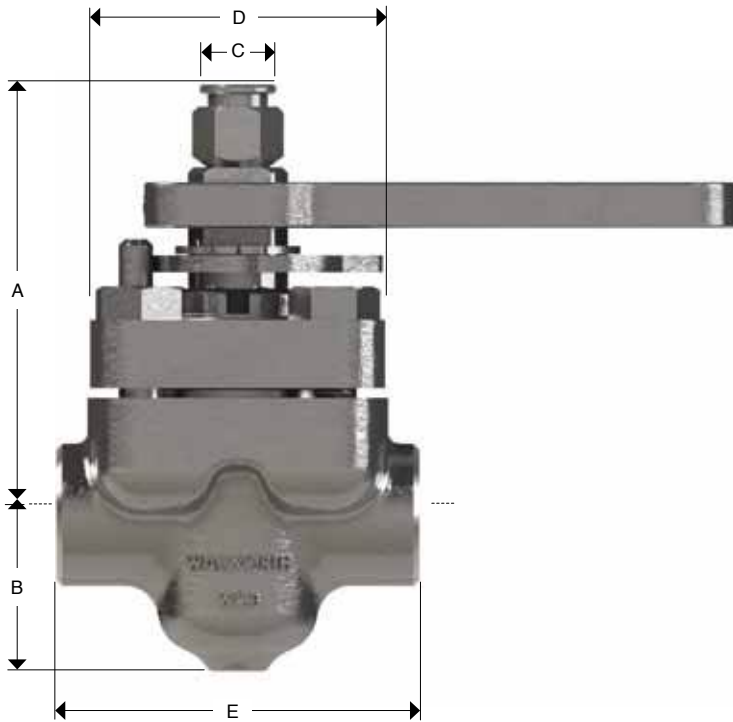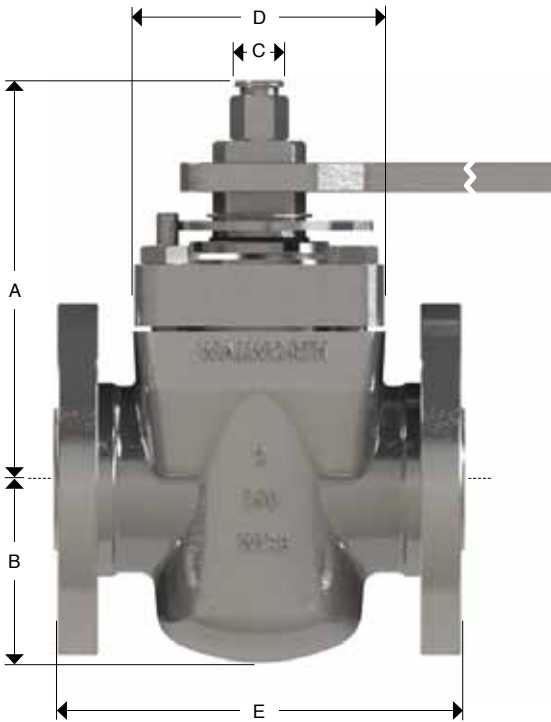

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions				Approx Weight				Wrench No.
										E				RF/RTJ		THREADED		
		A		B		C		D		RF		THREADED						
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
1	25	6.87	174	2.12	54	1.22	31	3.12	79	-	-	-	-	6	13	4	9	IH-2
1 1/2	38	7.62	194	2.5	64	1.41	36	3.75	95	-	-	-	-	11	24	8	18	IH-3
2	50	9	229	3	76	1.6	41	4.25	108	7	178	7.75	197	16	35	12	26	IH-4
2 1/2	63	9.87	251	3.75	95	1.6	41	4.25	108	7.5	191	10	254	22	48	16	35	IH-4
3	80	10.87	276	4.37	111	1.94	49	5.25	133	8	203	10	254	32	70	25	55	IH-6
4	100	10.87	276	4.87	124	1.94	49	7	178	9	229	11.5	292	44	97	34	75	IA-1
6	150	14.62	371	5.62	143	2.31	59	8.5	216	10.5	267	-	-	63	139	-	-	IA-2
8	200	16.75	425	7.12	181	2.62	67	10	254	11.5	292	-	-	104	229	-	-	IA-3


TOP ENTRY PLUG VALVE SHORT PATTERN CLASS 300

(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	STM A 216 Gr. WCB/ A395 Gr.60-40-18
3	Retainer	Carbon Steel A216 Gr. WCB
4	Gland	Carbon Steel A216 Gr. WCB
5	Retainer Bolting	B7 Alloy Steel Studs
6	Gland Bolting	B7 Alloy Steel Studs
7	Diaphragm	Stainless Steel Type 410
8	Diaphragm Gasket	Non-asbestos composite
9	Packing	Alloy Steel O'ring Retainer Sleeve with Buna-N O'ring
10	Packing Retainer	Steel
11	Plug Check Valve	Steel
12	Sealant Fitting	Steel
13	Stop Collar	Steel
14	Collar Retainer	Steel
15	Wrench	Carbon Steel
16	Spring	Stainless Steel
17	Spring Washer	Steel
18	Seal	Nitrile (Buna-N)
19	Stop Post	Steel
20	Identification Plate*	Stainless Steel 304

*Not Shown
(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

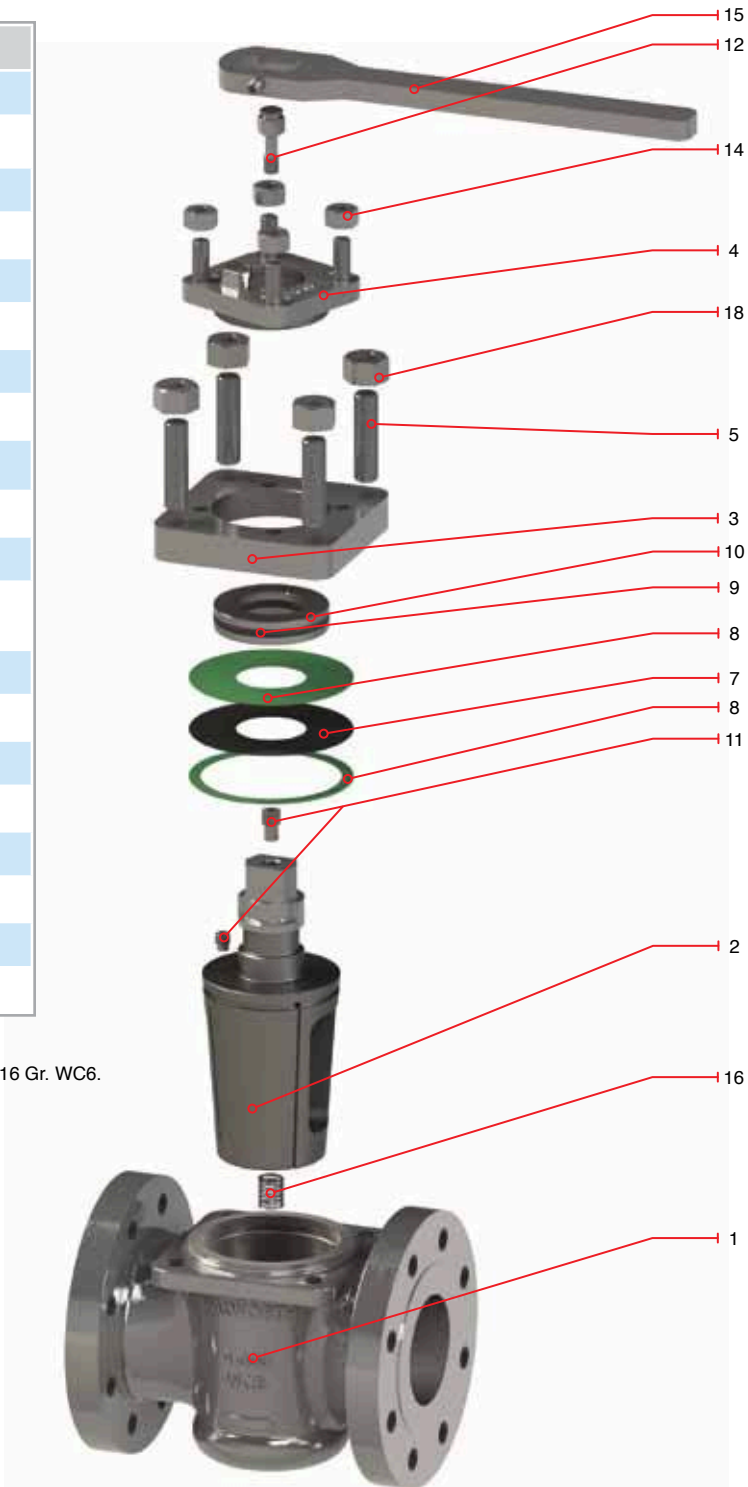



TOP ENTRY PLUG VALVE SHORT PATTERN CLASS 300

(WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions conform to ANSI/ASME B1.20.1
- Design as per API 6D

Figure no.	Operation	Type of ends
1760	Wrench	THREADED
1760F	Wrench	RF

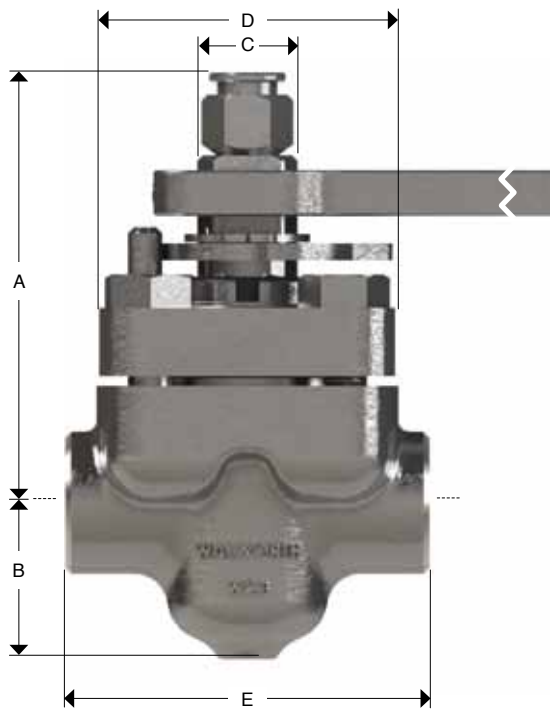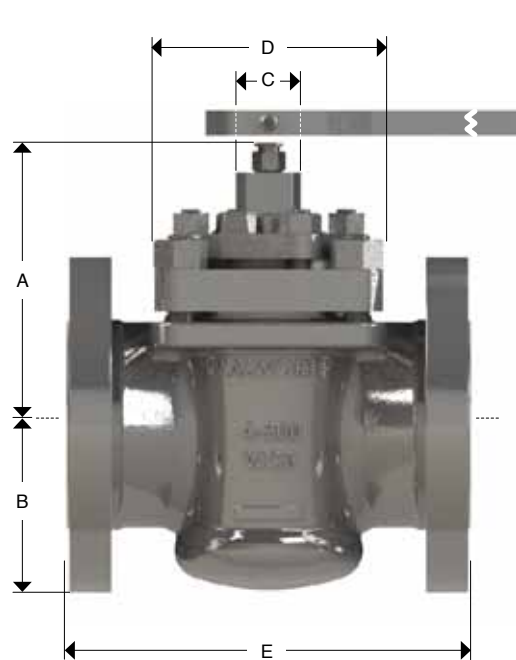

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions				Approx Weight				Wrench No.
										E				RF/RTJ		THREADED		
		A		B		C		D		RF		THREADED						
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
1/2	13	6.25	159	1.75	44	1.1	28	3.12	79	-	-	-	-	-	-	4	9	IH-1
3/4	19	6.25	159	1.75	44	1.1	28	3.12	79	-	-	-	-	-	-	4	9	IH-1
1	25	6.87	174	2	51	1.22	31	3.12	79	6.25	159	4.5	114	10	22	6	13	IH-2
1 1/2	38	7.62	194	2.5	64	1.41	36	3.75	95	7.5	190	6.69	170	14	31	8	18	IH-3
2	50	9	229	3	76	1.6	41	4.25	108	8.5	216	7.75	197	19	42	12	26	IH-4
2 1/2	63	9.62	244	3.75	95	1.6	41	4.25	108	9.5	241	10	254	26	57	17	37	IH-4
3	80	10.87	276	4.37	111	1.94	49	5.25	133	11.12	283	10	-	48	106	15	33	IH-6
4	100	11.12	282	4.87	124	1.94	49	7	178	12	305	-	-	57	125	-	-	IA-1