


COMPENSATOR PLUG VALVE VENTURI PATTERN

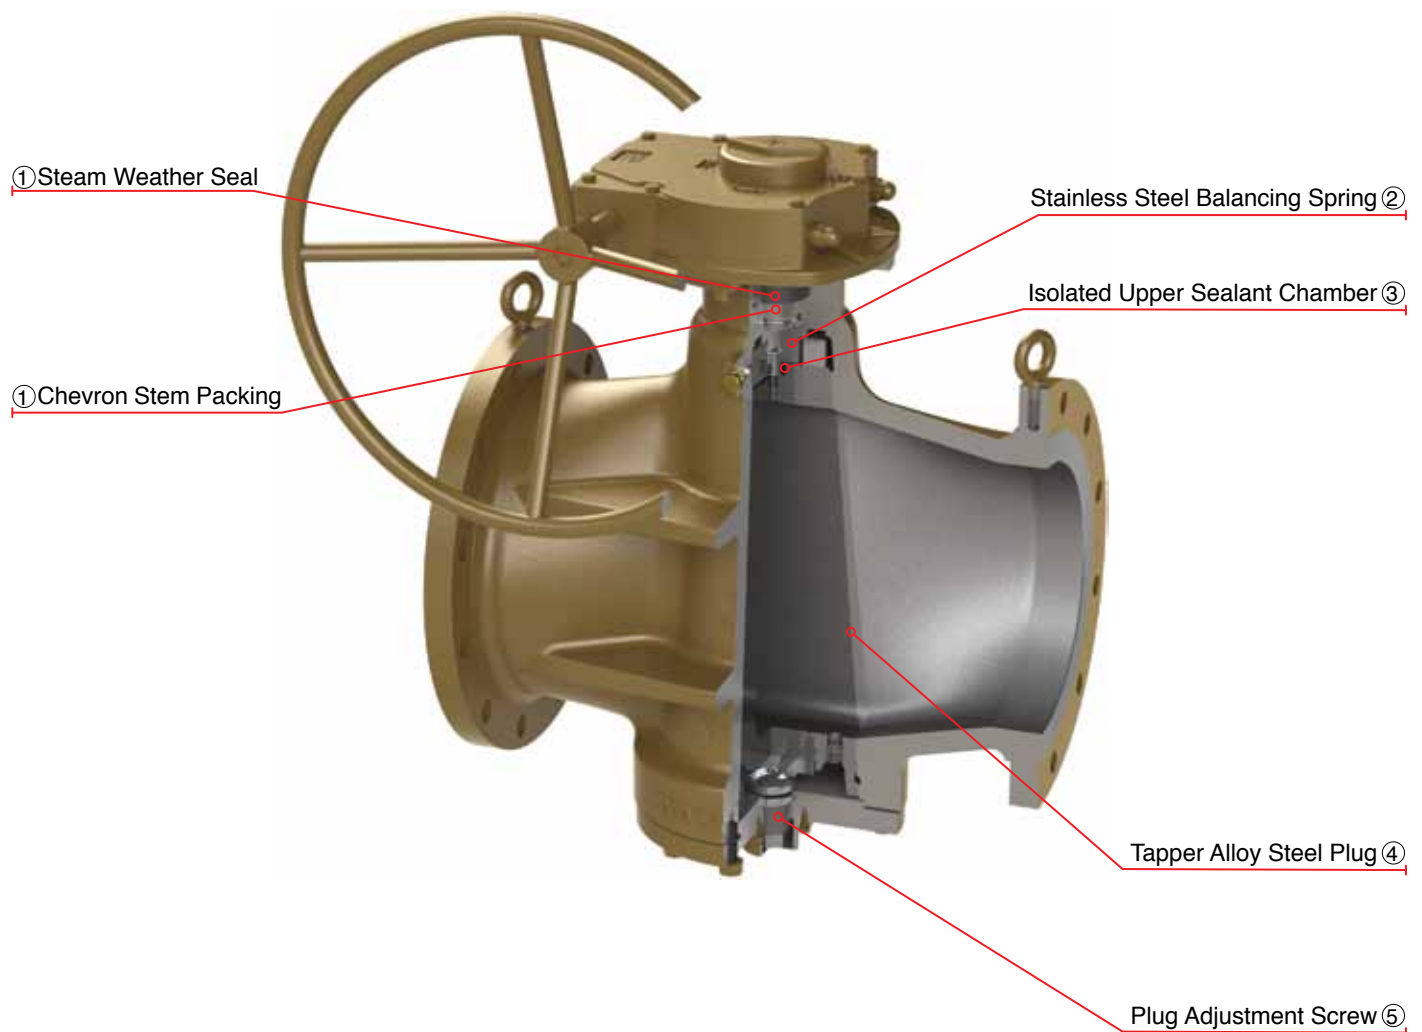

Design Features

- ① Stem Sealing System - the stem is protected two ways. The weather seal protects it from external attack. High temperature soft packing protects the stem against internal leakage.
 - ② Balancing Spring - the mechanical spring type grade 304 Stainless Steel is under compression and holds the plug in an equalized pressure position, thus eliminating the possibility of plug taper lock.
 - ③ Isolated Sealant Chamber - the sealant's function is to provide a backup to the positively biased surface between the plug and the body.
 - ④ Plug - the mechanically balanced plug has a permanently bonded PERFLO coating for a very low coefficient of friction. Operating torque remains low over the 4,000 cycle test life of the valve.
 - ⑤ Plug Adjustment - the steel plug is mechanically loaded into the body to put tension on the balance spring and is then adjusted for optimum balance and performance. The adjustment screw is covered to prevent tampering and possible misadjustment.
- * End to End Dimension as per ASME B16.10 to meet Venturi Pattern Length


COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 150 (GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Spherical Disc	Alloy Steel AISI 4140
9	Thrust Spherical Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve*	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Check valve	Commercial Steel
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5
30	Packing Injector	Carbon Steel

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

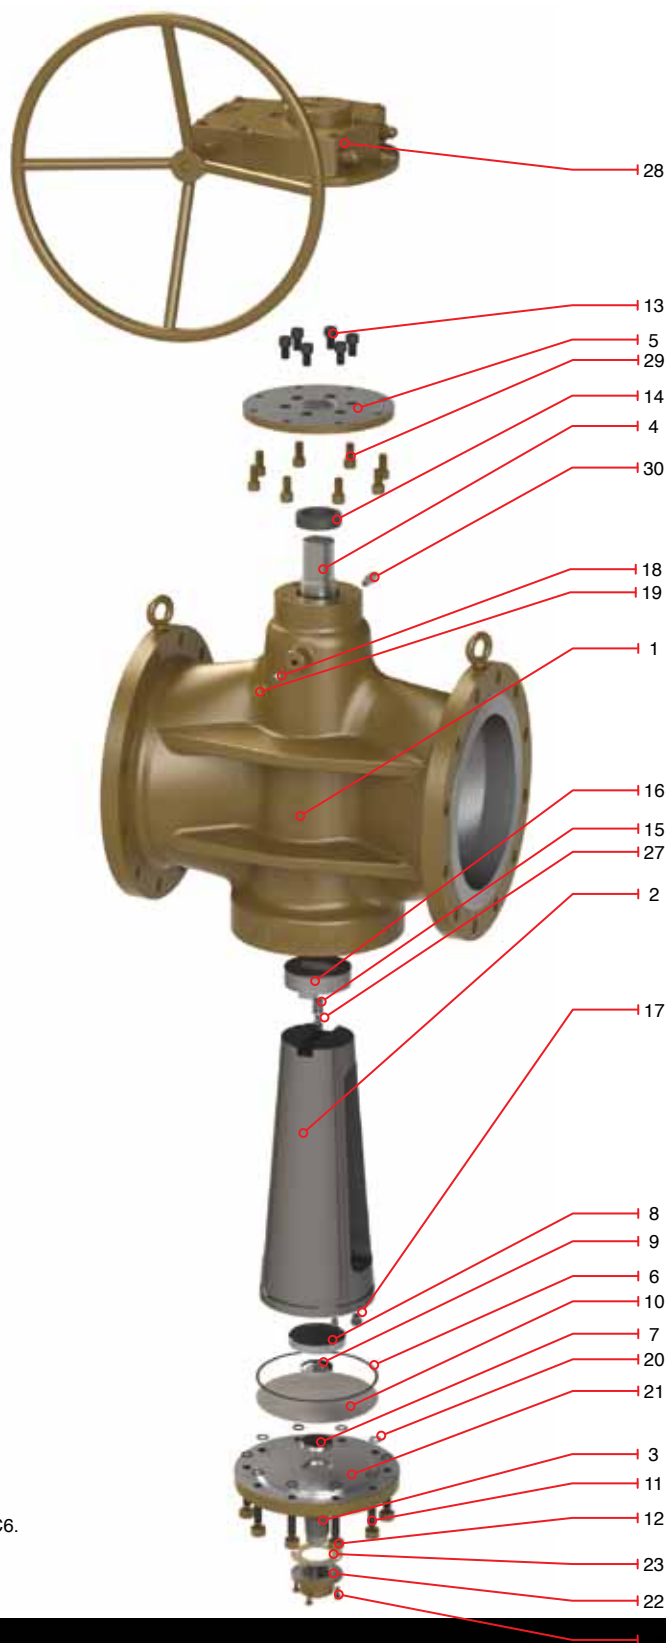



COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 150

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
1622	Gear operator	RF
1624	Gear operator	WE

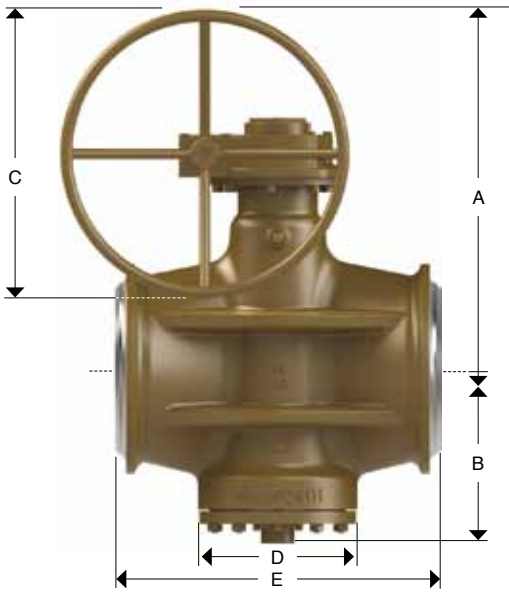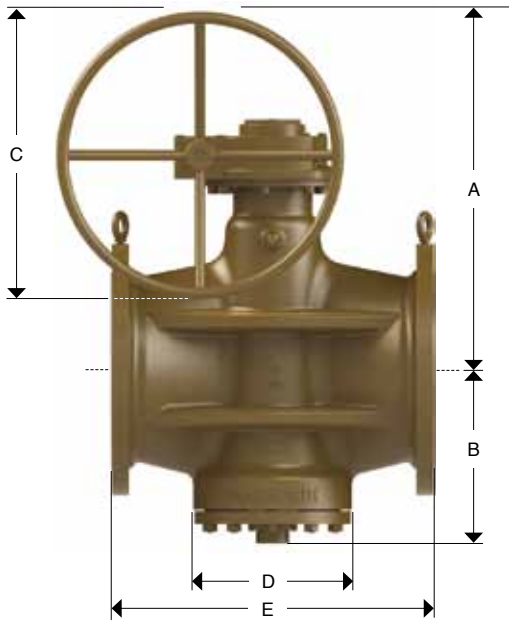


Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
14	350	20	508	14	356	30	762	18	457	27	686	27.5	699	27	686	460	1012	345	759
16	400	25	635	13	330	20	508	20	508	30	762	30.7	775	30	762	725	1595	545	1199

COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 300 (WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Spherical Disc	Alloy Steel AISI 4140
9	Thrust Spherical Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Check Valve	Commercial Steel
32	Wrench	Carbon Steel
33	Packing Injector	Carbon Steel


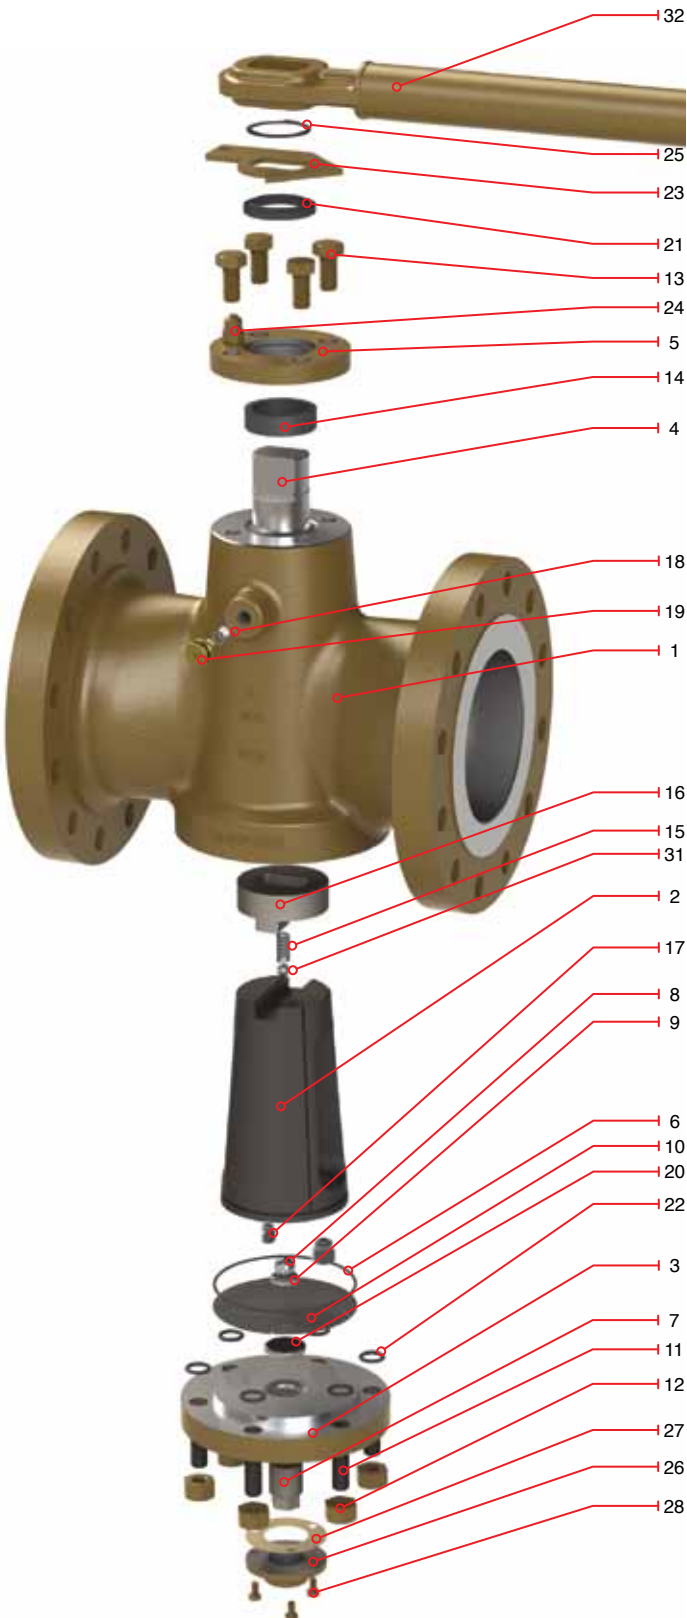


COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 300 (WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
3612	Wrench	RF
3613	Wrench	RTJ
3614	Wrench	WE

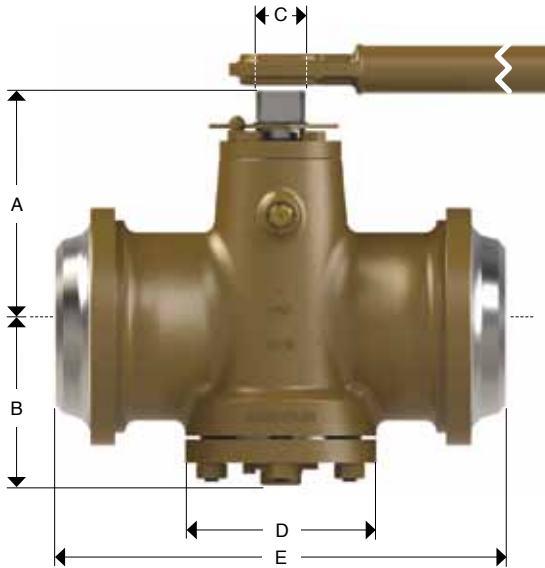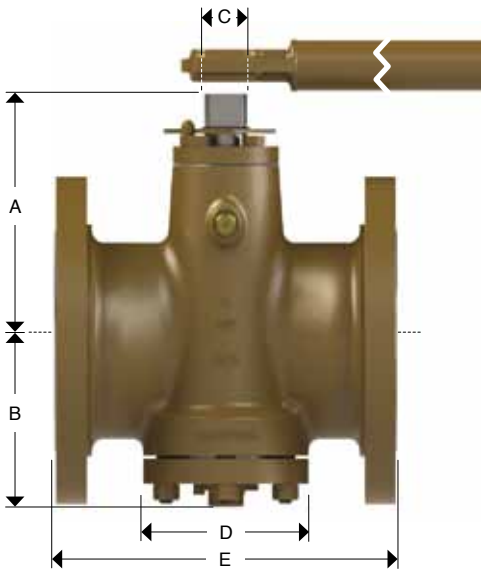

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ		WE						
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
6	150	9.45	240	6.33	161	1.99	51	7.62	194	15.87	403	16.5	419	18	457	75	165	56	123	IB-3
8	200	10.5	267	7.81	198	1.99	51	8.75	222	16.5	419	17.12	435	20.5	521	120	264	96	211	IB-3


COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 300

(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Spherical Disc	Alloy Steel AISI 4140
9	Thrust Spherical Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Check Valve	Commercial Steel
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown
(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

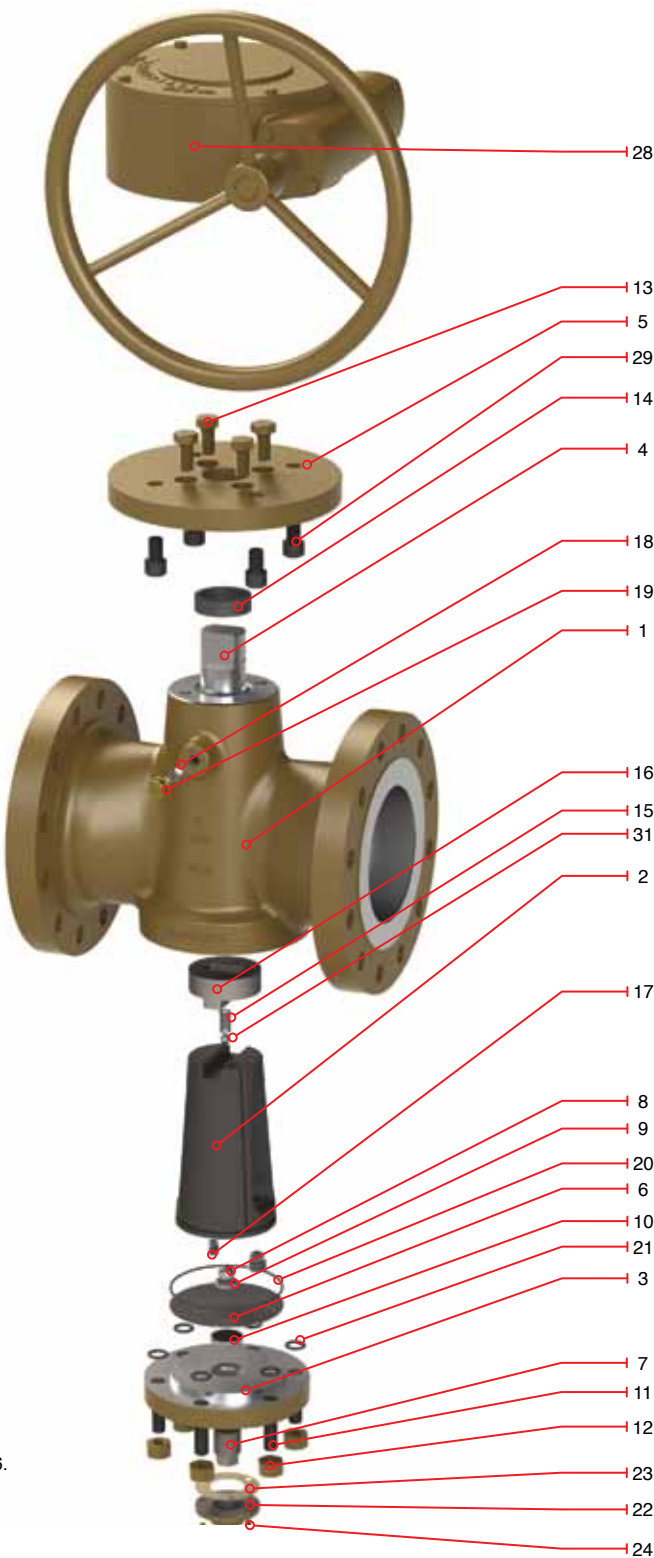



COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 300

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
3622	Gear operator	RF
3624	Gear operator	RTJ
3624	Gear operator	WE

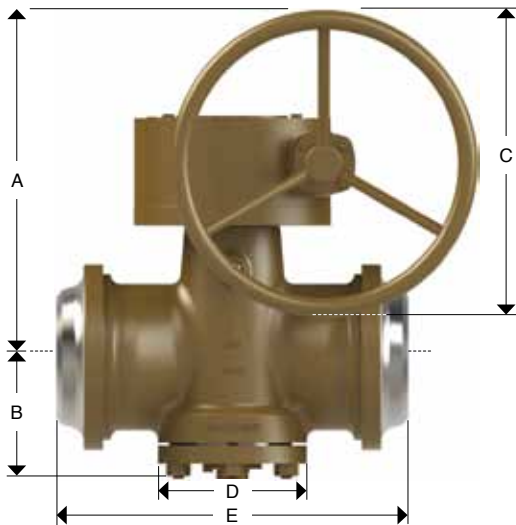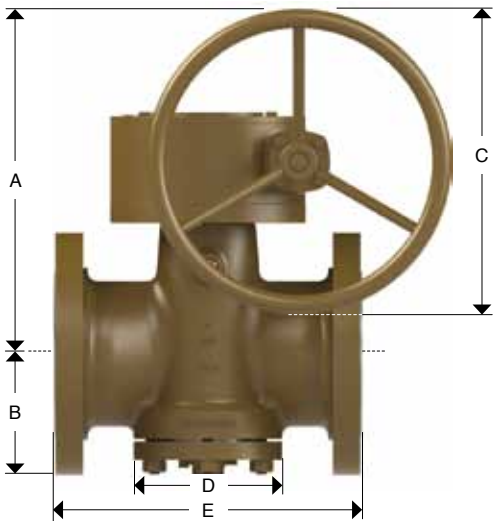

Dimensions and Weights


Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
6	150	11.37	289	6.33	161	20	508	7.62	194	15.87	403	16.5	419	18	457	102	224	85	187
8	200	11.94	303	7.81	198	20	508	8.75	222	16.5	419	17.12	435	20.5	521	150	330	115	253
10	250	16.28	414	10.25	260	30	762	11.75	298	18	457	18.62	473	22	559	310	682	256	563
12	300	18.07	459	13.25	337	30	762	12.87	327	19.75	502	20.37	518	25	635	402	884	335	737
14	350	19.5	495	13.38	340	30	762	23	584	30	762	30.62	778	30	762	639	1406	530	1166
16	400	23.25	591	14.31	363	20	508	25.5	648	33	838	33.62	854	33	838	825	1815	670	1474
20	500	24.75	629	18.12	460	30	762	30.5	775	39	991	39.75	1010	39	991	1516	3335	1340	2948
24	600	30.3	770	21.12	536	30	762	36	914	45	1143	45.87	1165	45	1143	2465	5423	2200	4840

COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 600

(WRENCH OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Spherical Disc	Alloy Steel AISI 4140
9	Thrust Spherical Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Stem Environmental Seal	Elastomer
22	Cover Studs Environmental Seals	Buna N
23	Stop Collar	Carbon Steel
24	Stop Pin	Carbon Steel
25	Retainer	Carbon Steel
26	Adjustment Cover	Carbon Steel
27	Adjustment Cover Gasket	Natural Fiber
28	Adjustment Cover Screw	Carbon Steel
29	Identification Plate*	Stainless Steel 304
30	Sealant*	Walseal #10
31	Balance Check Valve	Commercial Steel
32	Wrench	Carbon Steel
33	Packing Injector	Carbon Steel


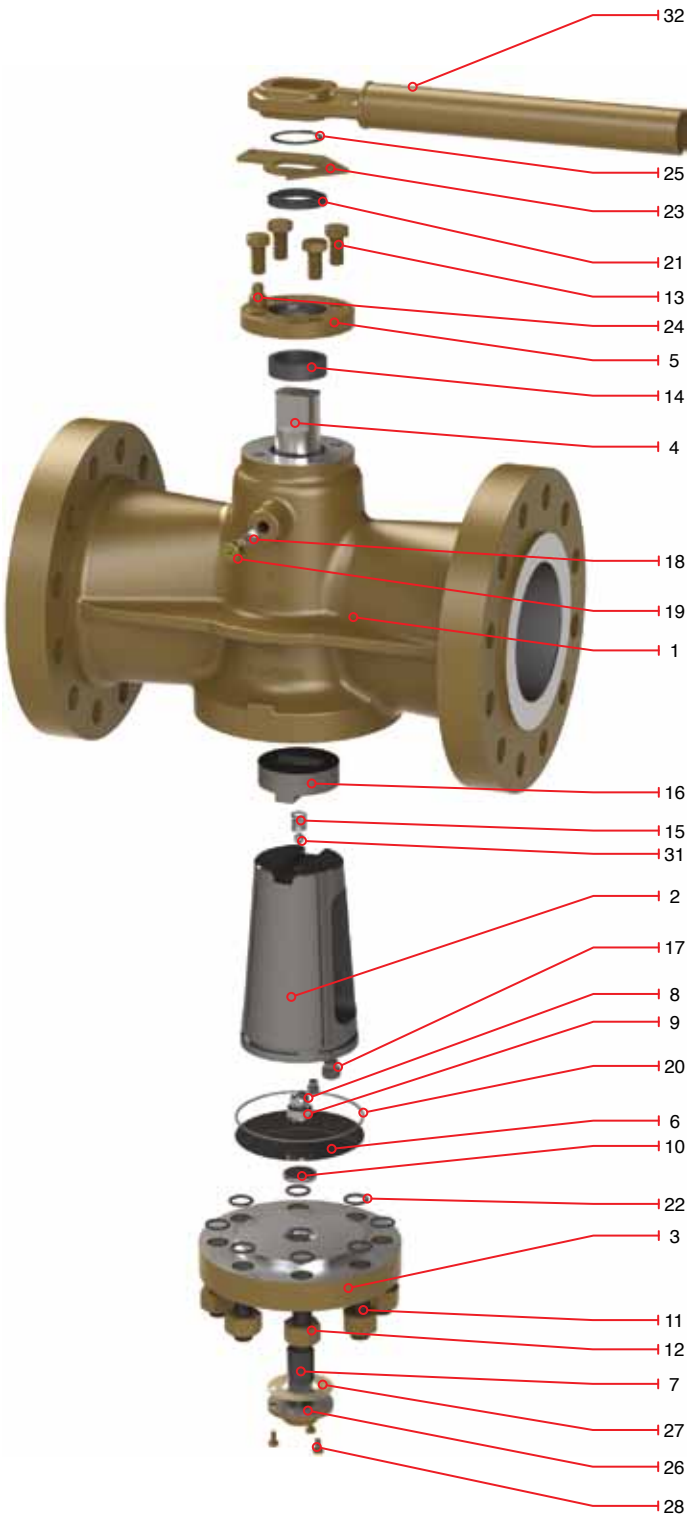


COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 600 (WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
6612	Wrench	RF
6613	Wrench	RTJ
6614	Wrench	WE

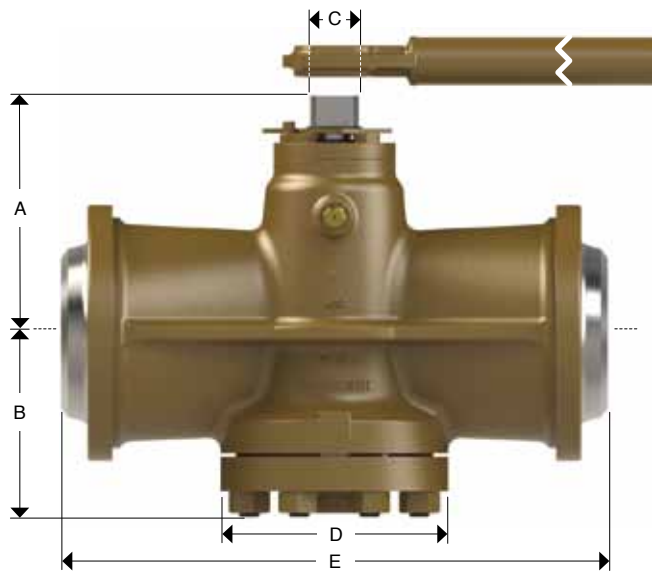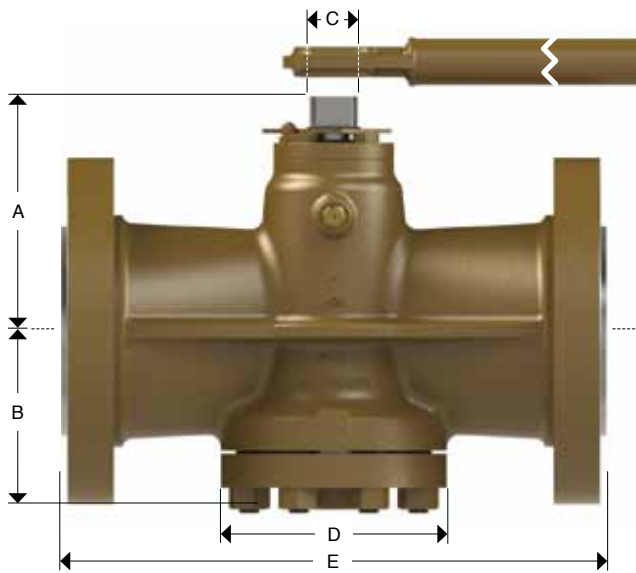

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ		WE						
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
6	150	11.9	302	7.19	183	1.99	51	9.12	232	22	559	22.12	562	22	559	157	345	120	264	IB-3

COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 600


(GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Spherical Disc	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Spherical Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Check Valve	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

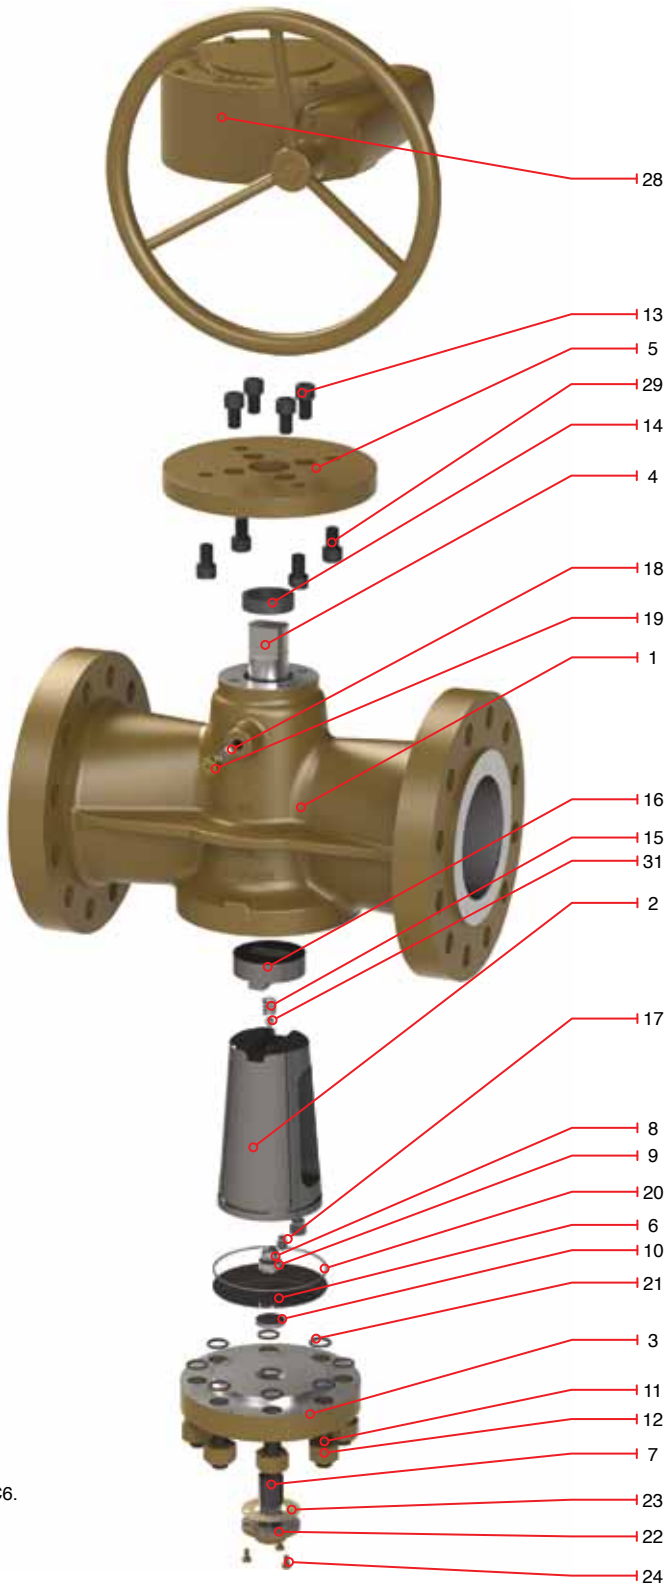



COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 600

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
6622	Gear operator	RF
6624	Gear operator	RTJ
6624	Gear operator	WE

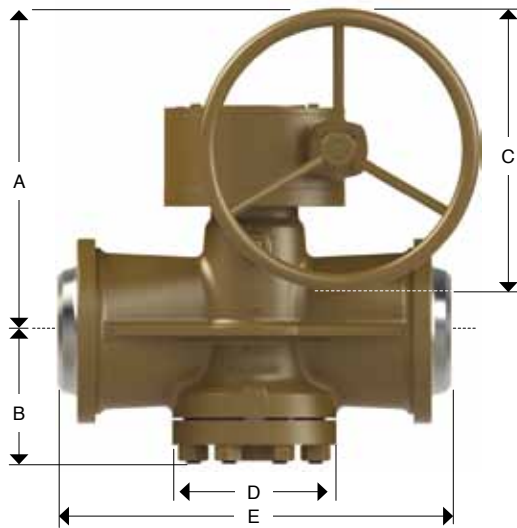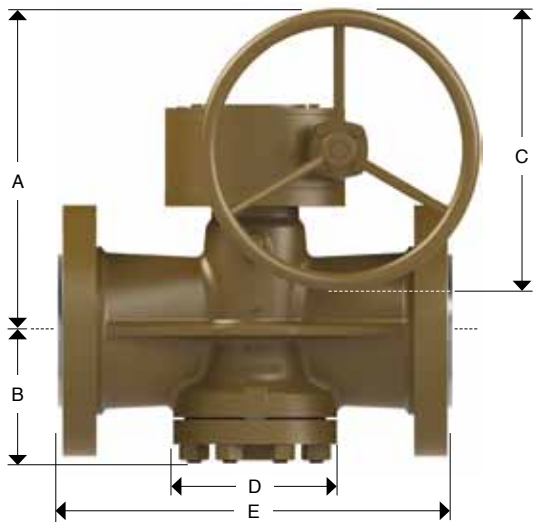

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
6	150	11.9	302	7.19	183	20	508	9.12	232	22	559	22.12	562	22	559	185	407	150	330
8	200	13.53	344	8.56	217	20	508	10.5	267	26	660	26.12	664	26	660	277	609	208	458
10	250	14.5	368	12.31	313	30	762	12	305	31	787	31.12	791	31	787	455	1001	340	748
12	300	18.84	479	14	356	30	762	13.37	340	33	838	33.12	841	33	838	615	1353	460	1012
14	350	23.37	594	23.37	594	20	508	18.25	464	35	889	35.12	892	35	889	835	1837	630	1386
16	400	24.62	625	24.62	625	30	762	23	584	39	991	39.12	994	39	991	1460	3212	950	2090
18	450	24.1	612	24.1	612	30	762	31.87	809	43	1092	43.12	1095	43	1092	2045	4499	1715	3773
20	500	25.12	638	25.12	638	30	762	33.5	851	47	1194	47.25	1200	47	1194	2475	5445	2090	4598
24	600	36.37	924	36.37	924	30	762	42	1067	55	1397	55.37	1407	55	1397	4515	9933	4020	8844


COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 900 (GEAR OPERATED)

Regular Bill of Materials

No.	Description	Standard Material
1	Body	Carbon Steel A216 Gr. WCB
2	Plug ⁽¹⁾	ASTM A 216 Gr. WCB / A395 Gr. 60-40-18
3	Cover	A515 Gr. 70
4	Stem	Stainless Steel A276 Type 410
5	Gland	A515 Gr. 70
6	Diaphragm	Stainless Steel A167 Type 304
7	Adjustment Screw	Alloy Steel A322 Gr. 4140
8	Thrust Spherical Disc	Cr. Steel Gr. 200, A295 Type 52100
9	Thrust Spherical Seat	Alloy Steel AISI 4140
10	Thrust Button	Carbon Steel
11	Cover Studs	Alloy Steel A193 Gr. B7
12	Cover Stud Nuts	Carbon Steel A194 Gr. 2H
13	Gland Screw	Carbon Steel A449 Gr. 5
14	Stem Packing	Graphite
15	Balance Spring	Stainless Steel
16	Stem to Plug Coupling	Alloy Steel A322 Gr. 4140
17	Plug Check Valve	Commercial Steel
18	Sealant Check Valve	Commercial Steel
19	Sealant Injection Fitting	Commercial Steel
20	Cover Gasket	Soft Steel
21	Cover Studs Environmental Seals	Buna N
22	Adjustment Cover	Carbon Steel
23	Adjustment Cover Gasket	Natural Fiber
24	Adjustment Cover Screw	Carbon Steel
25	Identification Plate*	Stainless Steel 304
26	Sealant*	Walseal #10
27	Balance Check Valve	A295 Type 52100
28	Gear Box	Commercial Steel
29	Top Socket Screw	Carbon Steel A449 Gr. 5
30	Packing Injector	Carbon Steel

*Not Shown

(1) Valves from ½" to 1 ½" classes from 150 to 1500 with A322 Gr. 4140 or A216 Gr. WC6.

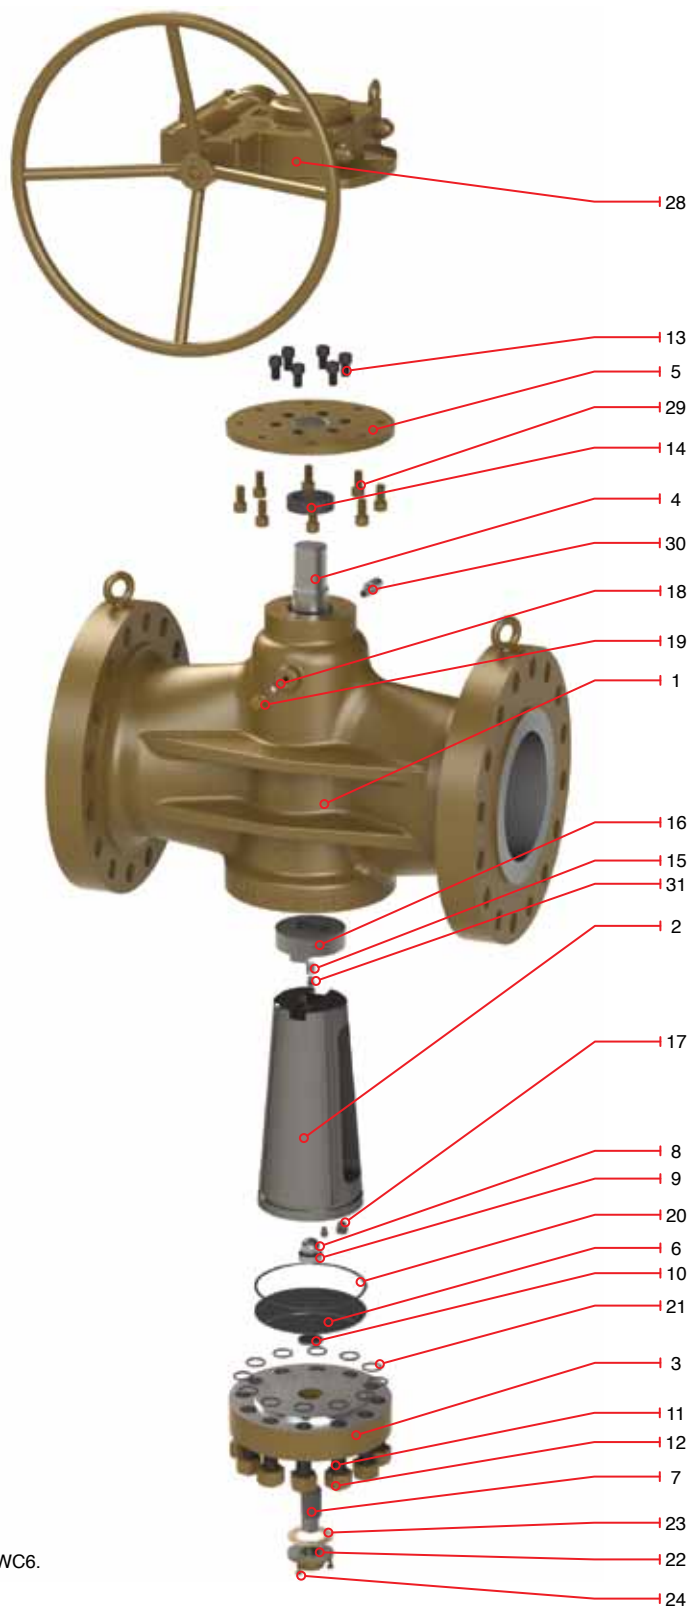



COMPENSATOR PLUG VALVE VENTURI PATTERN CLASS 900

(GEAR OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
9622	Gear operator	RF
9624	Gear operator	RTJ
9624	Gear operator	WE

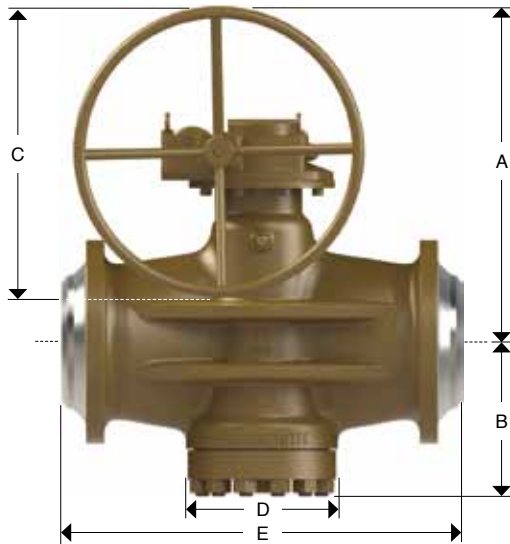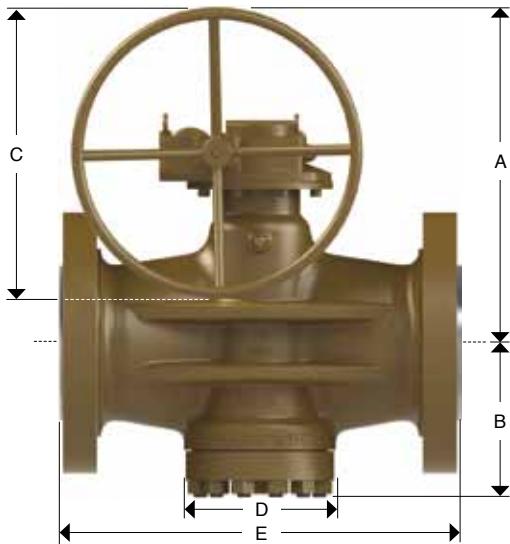

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight			
										E						RF/RTJ		WE	
		A		B		C		D		RF		RTJ		WE					
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb
10	250	19.25	489	12.81	325	20	508	12.25	311	33	838	33.12	841	33	838	540	1188	450	990
12	300	22.03	560	14.87	378	30	762	14.125	359	38	965	38.12	968	38	965	920	2024	600	1320
16	400	24.8	630	17.75	451	30	762	18.25	464	44.5	1130	44.8	1140	44.5	1130	2000	4400	1740	3828