


Changeover Valves

Standard & Tandem Valves



SchuFI 

Dimension Sheet Type 60WN (ASME 150-300# / PN16-40)

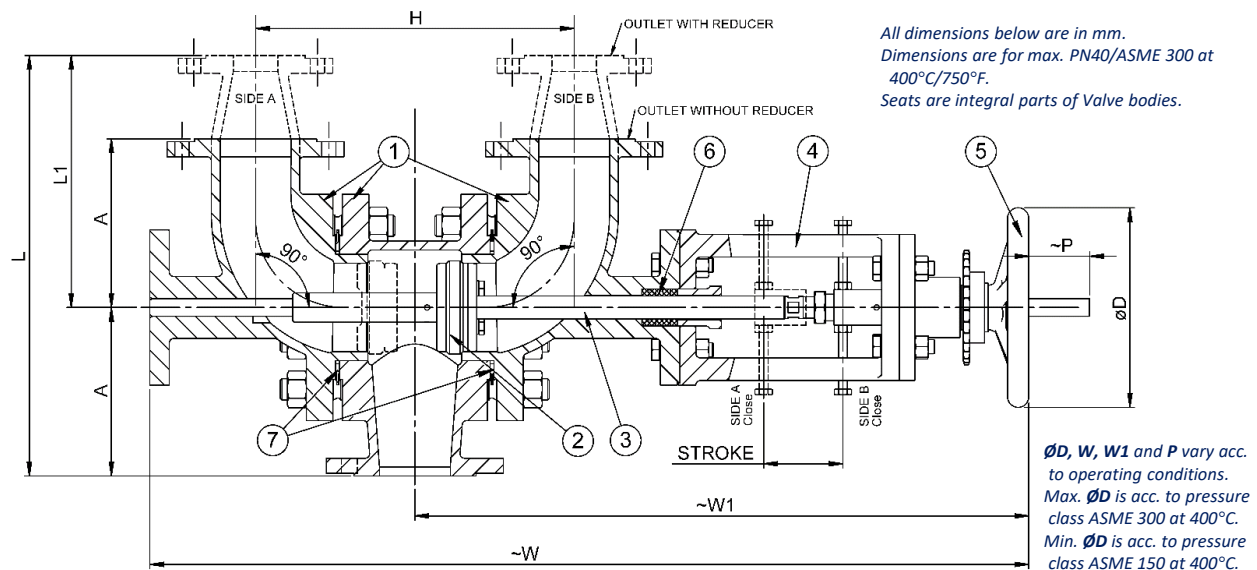

COV Standard dimensions													
SIZES		A	H	L1 for Reducer		Max				Stroke	Min ØD	Zeta*	Weight (Kgs)
ASME 150-300	DIN PN16-40			ASME/DIN	L1	ØD	W1	W	P				
1"	25	115	190	---	---	160 ^{a)}	515	665 / 673	30	45	160 ^{a)}	0.65	45
1½"	40	150	265	---	---	225 / 280	593	665 / 673	35	55	160 ^{a)}	0.65	65
2"	50	150	265	1" / 25	205	225 / 360	625	845	45 / 65	60	160 ^{a)}	0.75	85
				1½" / 32	---								
				1½" / 40	---								
2½"	65	190	360	---	---	360	682	962	80	80	225 ^{a)}	0.65	115
3"	80	190	360	1½" / 40	255	280 / 360	675 / 690	975 / 990	70 / 95	90	225 ^{a)}	0.75	150
				2" / 50	255								
				2½" / 65	---								
4"	100	230	460	2" / 50	---	360 / 400	790 / 820	1140 / 1170	115 / -	112	225	0.8	180
				2½" / 65	---								
				3" / 80	300								
5"	125	230	460	---	---	360	795	1145	145	135	225	0.7	285
6"	150	280	600	3" / 80	380	560	1035	1480	175	165	280	0.9	350
				4" / 100	380								
				5" / 125	---								
8"	200	370	800	4" / 100	---	800	1235	1840	225	218	360	0.6	600
				5" / 125	---								
				6" / 125	490								
10"	250	430	900	5" / 150	---	800	1345	2010	270	262	360	0.8	925
				6" / 200	570								
				8" / 200	570								
12"	300	440	950	---	---	---	---	---	---	---	---	---	---
14"	350	470	1090	---	---	---	---	---	---	---	---	---	---
16"	400	480	1140	---	---	---	---	---	---	---	---	---	---

Part	Part number	Material version and temperature range in °C				
		from -29 to 425	from -46 to 340	from -46 to 340	from -184 to 425/538	from -46 to 340
		WCB	LCB	LCC	Stainless Steel	LCC/Monel Trim version
Body	1	WCB	LCB	LCC	CF3/CF8M	LCC
Disc	2	316	316	316	316	Monel 400
Spindle	3	316	316x	316	316	Monel 400
Yoke	4	WCB/CF3/CF8	WCB/CF3/CF8	WCB/CF3/CF8	CF3/CF8	CF3/CF8
Handwheel	5	C.I	C.I	C.I	C.I	C.I
Packing	6	PTFE/Graphite	PTFE/Graphite	PTFE/Graphite	PTFE/Graphite	PTFE/Graphite
Gasket	7	PTFE/316L	PTFE/316L	PTFE/316L	PTFE/316L	PTFE/Monel

NOTES:



* Zeta values are only applicable for valves without Reducers.

a) Actuator with rising handwheel: Note that other actuators with non-rising handwheel and spindle will protrude "P" mm, at the point where disc seals at Side B.

All weights are approximate.

- Note that from Size 1" to 2", the valves use a disc/fins design, rather than a guide rod at side A.

Dimension Sheet - Type 69WN (ASME Class 150-300 / PN16-40)

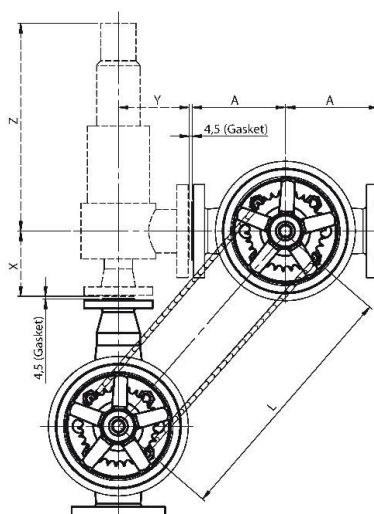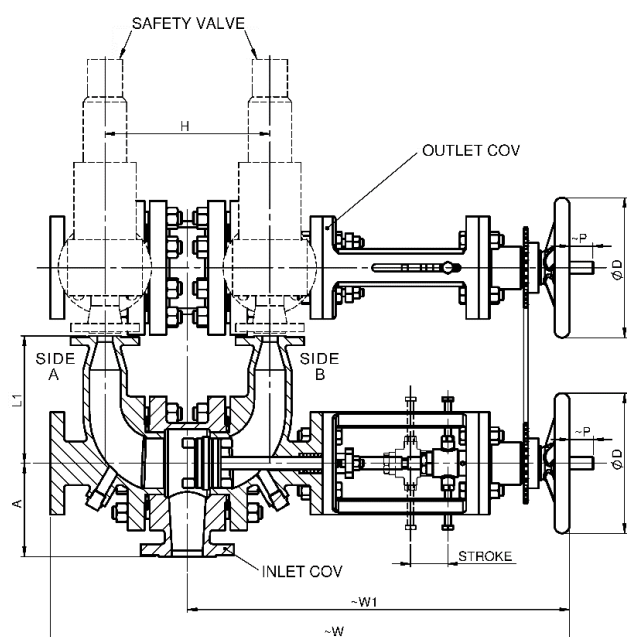

All dimensions are in mm.
Dimensions are for max PN40/ASME 300 at 400°C/750°F.
Seats are integral parts of Valve bodies.

ØD, W, W1 and P vary acc. to operating conditions.
Max. ØD is acc. to pressure class ASME 300 at 400°C; Min. ØD is acc. to pressure class ASME 150 at 400°C.


* Marked valves below shall have external reducers bolted to the valve.

NOTES:
All weights are approximate.
Actuators with non-rising handwheel and spindle will protrude "P" mm at the point where disc seals at Side B.

- Note that from Size 1" to 2", the valves use a disc/fins design, and not a guide rod at Side A.

COV DIMENSIONS											
	SIZES		A	L1	H	Max.				Weight Kgs	STROKE
	ASME (150-300)#	DIN PN(16-40)				ØD 150#-300#	W1 150#-300#	W 150#-300#	P 150#-300#		
INLET COV	2"x1"x1"	50x25x25	150	205	265	225/360	655	875	45/65	170	60
* INLET COV	2"x1¼"x1¼"	50x32x32		264/270							
* INLET COV	2"x1½"x1½"	50x40x40		267.5/274.5							
OUTLET COV	2"x2"x2"	50x50x50	190	NA	360	280/360	710/720	1010/1020	70/95	300	90
INLET COV	3"x1½"x1½"	80x40x40		255							
INLET COV	3"x2"x2"	80x50x50		255							
* INLET COV	3"x2½"x2½"	80x65x65	230	315.5/322.5	460	360/560	820/860	1140/1210	115/120	410	112
OUTLET COV	3"x3"x3"	80x80x80		NA							
* INLET COV	4"x2"x2"	100x50x50		359.5/370.5							
* INLET COV	4"x2½"x2½"	100x65x65	280	362.5/373.5	600	560	1065	1510	175	850	165
INLET COV	4"x3"x3"	100x80x80		300							
OUTLET COV	4"x4"x4"	100x100x100		NA							
INLET COV	6"x3"x3"	150x80x80	370	380	800	800	1265	1870	225	1500	218
INLET COV	6"x4"x4"	150x100x100		380							
* INLET COV	6"x5"x5"	150x125x125		435.5/457.5							
OUTLET COV	6"x6"x6"	150x150x150	430	NA	900	800	1375	2040	270	1750	262
* INLET COV	8"x4"x4"	200x100x100		582/603							
* INLET COV	8"x5"x5"	200x125x125		582/606							
INLET COV	8"x6"x6"	200x150x150	430	490							
OUTLET COV	8"x8"x8"	200x200x200		NA							
* INLET COV	10"x5"x5"	250x125x125		669/698							
INLET COV	10"x6"x6"	250x150x150	430	570							
INLET COV	10"x8"x8"	250x200x200		570							
OUTLET COV	10"x10"x10"	250x250x250		NA							

Dimension Sheet - Type 60WN and 69WN Combination (ASME Class 600 / PN63-PN100)

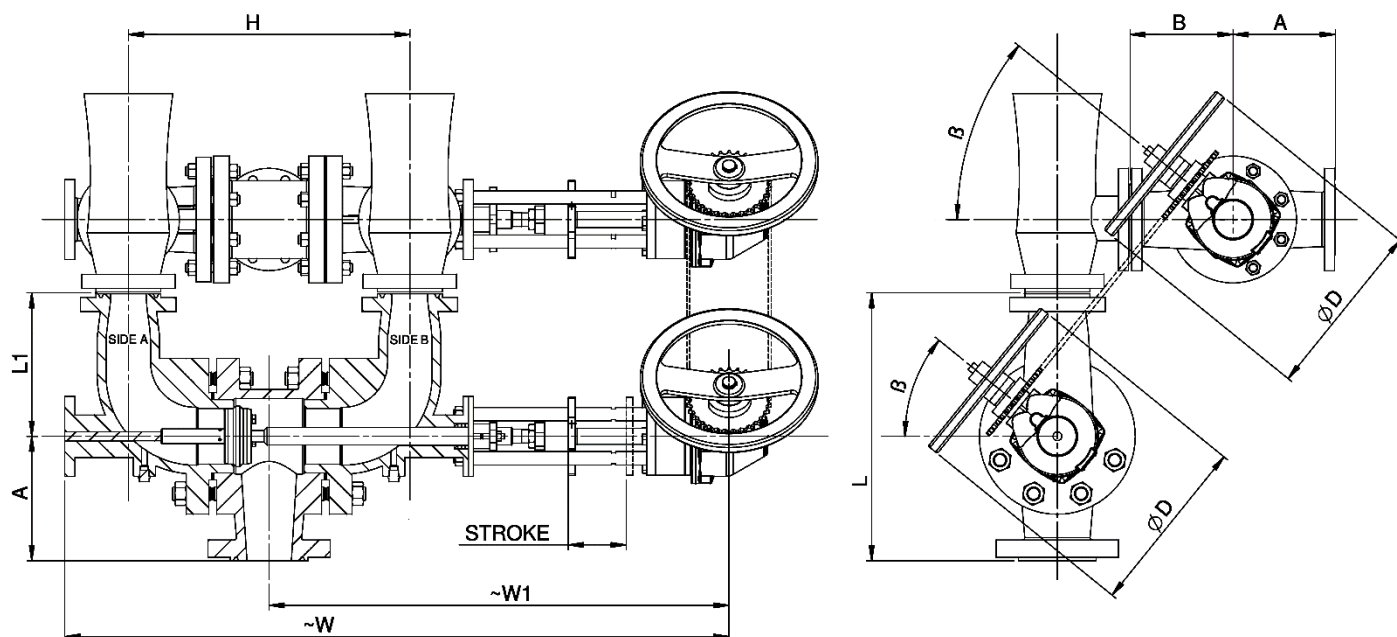

COV standard dimensions

SIZES		A	B	H	L1 for REDUCER	L	BEVEL GEAR BOX			STROKE	Zeta*
ASME (600#)	DIN (PN63- 100)						ØD	W1	W		
2"	50	175	175	305	1"/25	235	400	755	995	60	0.75
3"	80	220	230	452	2"/50	280	400	910	1260	90	0.75
4"	100	280	280	635	3"/80	320	400	1095	1560	140	0.8
6"	150	300	300	680	4"/100	500	500	1250	1850	165	0.9

All dimensions are in mm.

Dimensions are for max. PN100/ASME 600 at 200°C/392°F.

Seats are integral part of Valve bodies.

* Zeta values are only applicable for valves without Reducers.

ØD, W, W1 and P vary acc. to operating conditions.

NOTES:

- The 2" valve design uses an NF actuator together with a disc/fins design, and not a guide rod at Side A.

- Angular dimension β is approx. 45° and subject to change depending on possible safety valve dimensions.

Applications

- Refining, Polymer, Chemical, Petrochemical and Offshore industries
- Part of plant safety dual pressure relief systems
- Located e.g. on storage tanks, in pumping or fluid transfer systems, between multiple heat exchangers or dual filtration systems.



Offshore
Changeover Valve

Advantages

- Switch over quickly and efficiently from one relief valve system to another
- Shorter transfer time in hostile plant environments provides greater worker safety
- No production system shutdown



Flushing connection/valve



Changeover valves in the workshop


Design Options

- Included reducers for safety valve mounting
- Bellow sealing for zero leakage to atmosphere
- Flushing valves
- Bleed/vent valves
- Heating jacket
- Automated actuation
- Special materials available on request
- Material according to NACE standard available

KEY FEATURES

- Sizes: 1" to 10", larger on demand
- Pressure rating: up to ASME #2500
- Leakage rate to process: Class V or VI
- Temperature rating: from -60 to +500°C
- Pressure drop: <3%, <1
- Improved body design for lower weight and Zeta value
- Material: Carbon steel and Stainless Steel as standard
- Disc and seat metal sealing as standard
- Manual actuation as standard

SchuF Worldwide

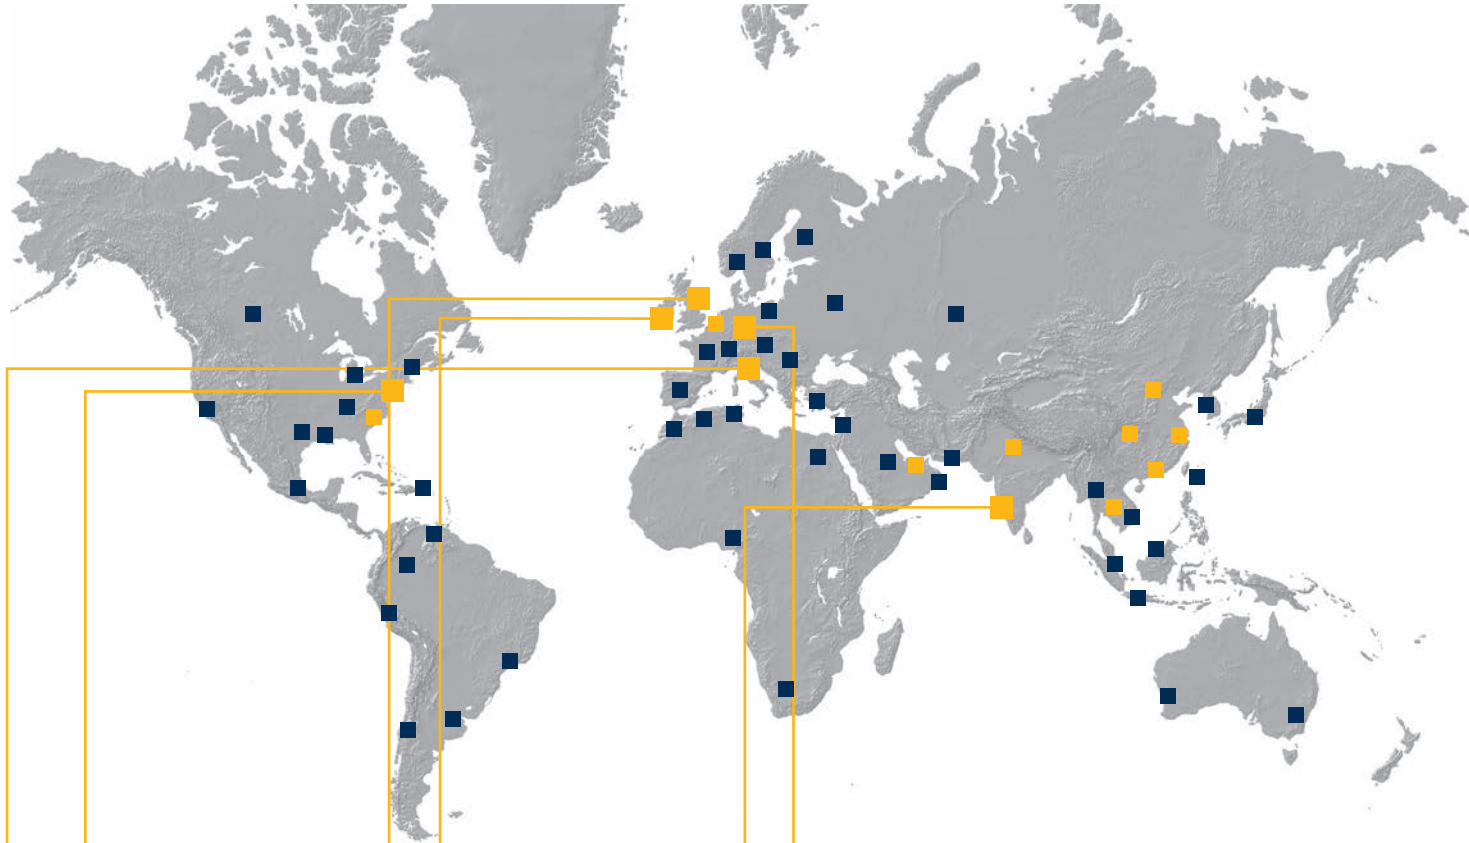

www.schuf.com • www.schuf.de

USA



Fetterolf Corporation
info@fetterolfvalves.com

USA Sales Channel
SchuF (USA) Inc.
sales@schuf.us

IRELAND



SchuF Valve Technology GmbH
sales@schuf.ie

GERMANY



**SchuF-Armaturen und
Apparatebau GmbH**
sales@schuf.com

Your Sales Channel:

- SchuF Benelux B.V.**
rklmk@schuf.com
- SchuF Middle East F.Z.C.**
ecalnan@schuf.com
- SchuF South East Asia Pte. Ltd.**
mmulder@schuf.com
- SchuF Valves China Ltd.**
schufchina@schuf.com

ITALY



La Tecnovalvo S.r.l.
info@latecnovalvo.com

UNITED KINGDOM



SchuF (UK) Ltd.
sales@schuf.co.uk

INDIA



**SchuF Speciality Valves
India Private Limited**
sales@schuf-india.com

Your Local Agent: