




Notes:
– All capacitors are X5R, 15V+, 10% or better unless otherwise noted

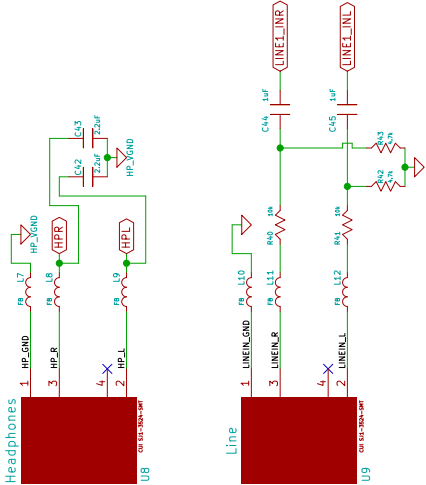

Video signal requires a 75ohm impedance load which has been calculated to require 12mil traces at 7mil spacing using a coplanar waveguide with GND underneath.



Video GND must route to star GND at VSSA2

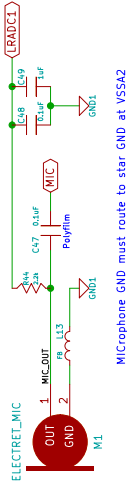

Microphone GND must route to star GND at VSSA2

www.PROpendous.org
Copyright Under the Creative Commons Attribution License
<http://creativecommons.org/licenses/by/3.0/>

Opendous Inc. (www.opendous.org)

File: PROpendous-Audio.sch

Sheet: /Audio/

Title: PROpendous

Size: A4 Date: 19 apr 2010

KiCad E.D.A.

Rev: 1.0

Id: 6/8