

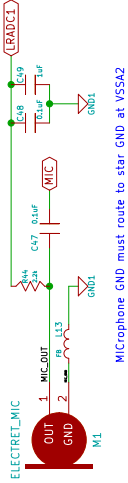


Notes:
– All capacitors are X5R, 10V+, 10% or better unless otherwise noted

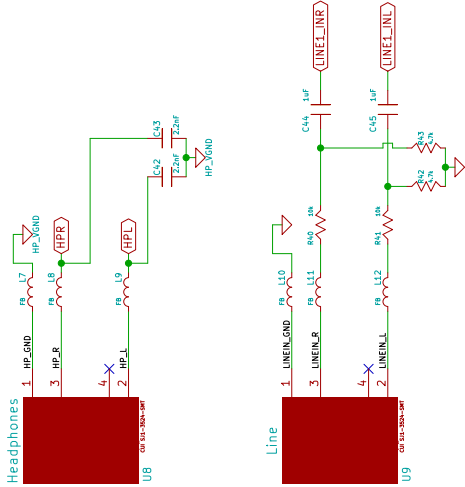

Video signal requires a 75ohm impedance load which has been calculated to require 10mil traces at 7mil spacing using a coplanar waveguide on 1/16 FR4 (Dk=4.4, Df=0.02).

Video GND must route to star GND at VSSA2

Microphone GND must route to star GND at VSSA2

