


# Eggduino with Arduino UNO as Controller and GRBL-Shield as Power Board

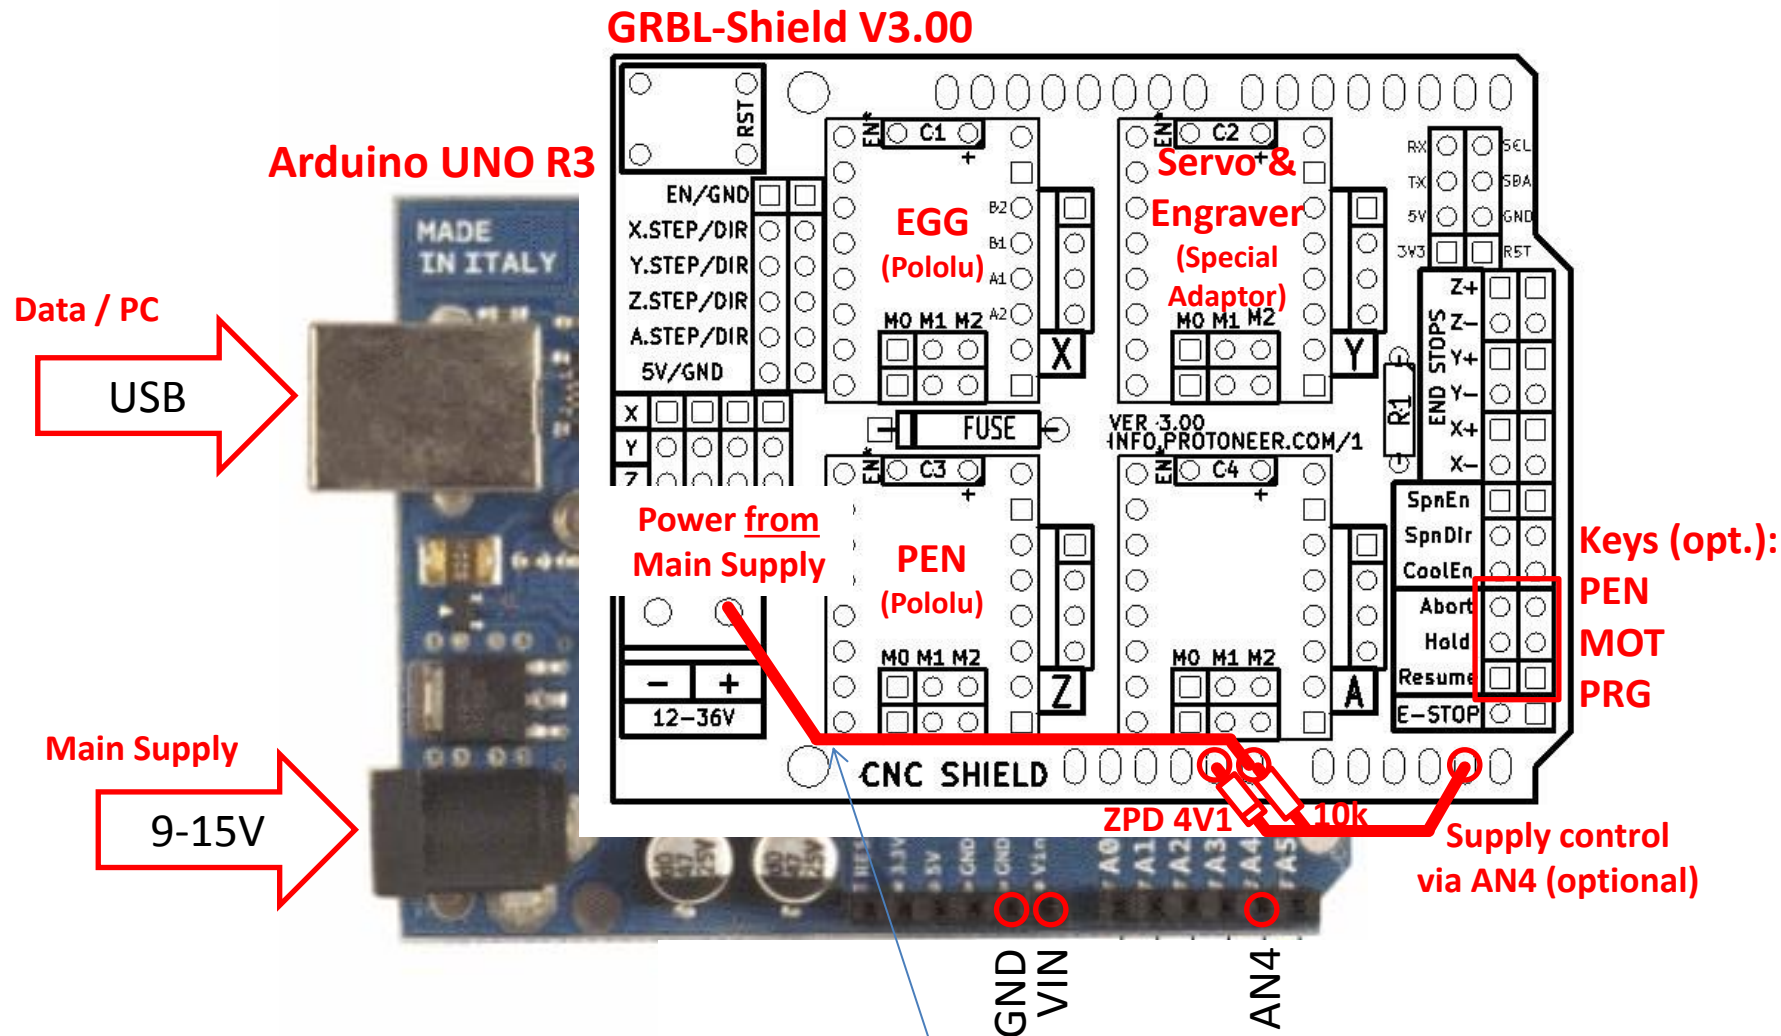

**VIN = Raw main supply after reverse polarity protection diode of the Arduino. This line is used as immediate power-source for the stepper-drivers  
→ just one single line to be soldered on GRBL-board.**