

Field observation — concrete structure near the 1948 node

Ladera Ranch vicinity, Orange County, California · recorded 2026-08-07 · LHDRS field record

THIS IS NOT AN IDENTIFICATION.

The structure below has not been measured to a standard, has not been sampled, and has not been examined by anyone qualified to identify it. Dimensions are as reported by the observer and are approximate. This document exists to record what was seen, set out what would confirm or exclude a cattle-dipping vat, and be handed to someone able to decide.

SAFETY — READ BEFORE RETURNING TO THE SITE

If this *is* a dipping vat, the sediment inside it is the single most concentrated place arsenic would be found anywhere in this landscape — this project's own modelling puts that compartment in the thousands of mg/kg against a California background of 1–11 mg/kg. **Do not dig in it. Do not handle or remove the sediment. Do not let children or animals into it.** Photograph and measure from outside. Arsenic does not degrade; a century has not reduced it.

The structure and its surroundings, as found

Photographs are presented exactly as taken — no rotation, cropping or enhancement. All archived with SHA-256 checksums in evidence/lhdrs/field_observations/.



View along the axis of the structure. The concrete channel runs away from the camera into heavy brush; a rusted pipe frame crosses the near end. Depth is obscured by sediment and vegetation.



Down-angle view of the near end: a clean concrete corner with a raised rim on both sides, and the pipe railing descending into the structure. The rim-and-corner geometry is what argues for a discrete vessel rather than a continuous ditch.



Weathered timber post with wire, standing near the structure. The 1911 specification's pen and cover posts were timber set 3 ft into the ground; wire-and-rail fencing enclosed the pens.



Fallen and leaning pipe rails in the brush beside the structure — consistent with chute or pen railing. Corroborating, not diagnostic.

What was observed

Attribute	As reported	Confidence
Material	Concrete	observer, direct
Length	approximately 15–20 ft	estimated, not measured
Width	approximately 3–4 ft	estimated, not measured
Depth	NOT MEASURED — obscured by infill	unknown
Form	Discrete linear channel with ends; not a continuous ditch run	observer, direct
Associated	Rusted pipe frame/rails at one end; weathered timber post with visible pipe set	observer, direct (second visit, 2026-08-07)
Setting	Heavy dry brush, drainage corridor, near the 1948 mapped structure	observer, direct

Coordinates	NOT RECORDED — no GPS in the image metadata	missing
Image	640 x 480 px, no EXIF GPS or timestamp retained	low resolution

The federal specification for a concrete dipping vat

USDA Bureau of Animal Industry Circulars 183 (1911) and 207 (1912) give construction specifications for **concrete** cattle-dipping vats. Circular 174 (1911) states cement is *preferable* to lumber because it “has not the disadvantage of leaking, which is common in wooden vats.” **Concrete construction is therefore consistent with, and in fact the recommended form of, a period dipping vat.**

Dimension	Circular 183 / 207 concrete vat	Structure as reported
Length	26 ft at top, tapering to 12 ft at bottom	~15–20 ft
Width	3.0 ft at top, tapering to 1.5 ft at bottom	~3–4 ft
Depth	6.5 ft	not measured
Capacity	1,470 gal at 5 ft 3 in fill	unknown
Chute	30 in wide, 20 ft long, leading in	not observed
Drip pen	~36 in wide, 20–40 ft, sloped back toward vat	not observed

Why it could be a vat — the case for

- **Concrete is the specified material.** Not merely compatible — Circular 174 recommends it over timber specifically because timber vats leaked.
- **Reported length falls inside the spec envelope.** The documented vat is 12 ft at the floor widening to 26 ft at the rim. A reported 15–20 ft is what an observer would measure on a *tapered* vat part-filled with sediment, reading the length at whatever level the infill now sits — not at the true floor or rim.
- **Reported width brackets the spec top width.** 3–4 ft observed against 3.0 ft specified.
- **It is a discrete structure with ends.** A concrete-lined drainage channel runs continuously across a slope; it does not begin and end in 15–20 ft. A vat does.
- **A metal frame is present.** Vats were fitted with rails, splash boards on hinged posts, and chute fencing. A rusted pipe frame at one end is consistent with that, though not diagnostic.
- **The setting fits the siting logic.** Vats were placed near water and stock-handling ground. The structure sits in a drainage corridor near the only mapped 1948 structure in the study area.

Why it might not be — the case against

Stated at equal length, because a document that only argues one way is worth nothing to the agency or specialist who has to act on it.

- **Depth is unmeasured, and depth is the whole question.** A dipping vat is **6.5 ft deep** with steep sides — cattle swim through it. If this structure proves to be 1–2 ft deep it is a trough, a flume or a lined ditch, and nothing else about it matters.
- **Concrete-lined drainage is extremely common here.** Brow ditches, V-ditches and terrace drains with pipe railings are standard on California graded slopes and in flood-control corridors. Many are 3–4 ft wide.

- **No taper has been confirmed.** A vat narrows markedly from rim to floor. A ditch has parallel walls. This has not been checked.
- **Neither end feature has been observed.** A vat is asymmetric — a steep entry slide at roughly 25° at one end, a cleated exit ramp at the other. Their absence would be strong evidence against.
- **No drip pen or chute has been seen.** These are large, concrete, and adjacent. Their absence is not conclusive — they may be buried or demolished — but their presence would be near decisive.
- **The systematic aerial search found no vat in this area.** 37,228 cells across the 1929, 1938 and 1947 frames returned nothing vat-like inside the study frame. That is weak evidence of absence, but it is on the record and must be weighed.
- **Age is unestablished.** Nothing observed dates the concrete. It could postdate the dipping era by decades.

Why a lone concrete channel is what a whole station leaves behind

A dipping vat was never a standalone object. Circular 183 specifies a complete **station**: receiving and retaining pens, a chute, the vat itself, an exit incline, a dripping pen, and a barrel sunk in the ground to catch and recycle run-off. Cattle moved through it in one direction.

The decisive detail is in the bill of materials. **The station splits cleanly by material, and only two components were concrete.**

Component	Specified material	Expected after a century
Vat	CONCRETE (or timber; concrete preferred)	SURVIVES
Dripping-pen floor	CONCRETE, 12 × 15 ft, pitched to a corner	SURVIVES
Chute, 30 in × 20 ft	timber	gone
Receiving / retaining pens	timber	gone
Dripping-pen posts and rails	timber, 6×6 posts, 1×8 rails	gone
Cover leaves / splash boards	timber on posts set 3 ft deep	gone
Entry slide facing	sheet boiler iron on the cement	rusted away
Drainage pipe and barrel	iron pipe, barrel sunk in ground	rusted / buried


What follows from that

A century on, the timber has rotted and the ironwork has largely gone. **The concrete is the only part expected to remain by default.** So an isolated concrete channel sitting in brush, with no pens, no chute and no fencing around it, is *precisely* what the surviving fragment of a complete dipping station would look like. The absence of the other components is the predicted condition — not evidence against.

This cuts the other way too, and should be said: the same argument means a surviving concrete fragment carries **less** corroborating context than an intact site would. There is no chute or pen left to confirm the interpretation. That is why the measurements in the next section carry so much weight — the structure has to identify itself.

A complete 1911-specification dipping station, in plan

Every dimension quoted from USDA Bureau of Animal Industry Circular 183 (1911). Drawn to scale.
Solid = CONCRETE, the only material that survives a century. Hatched = TIMBER and IRON, which do not.

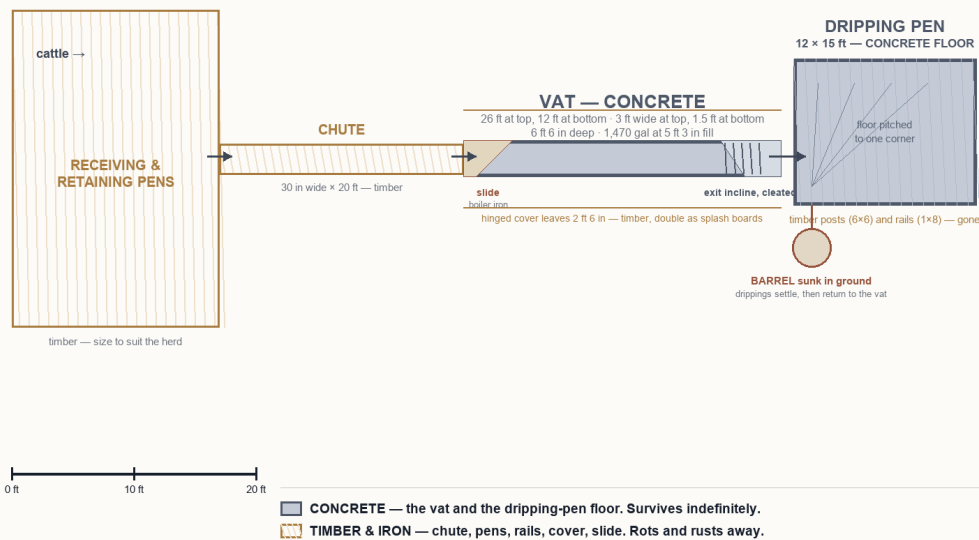

A century on, only the concrete is expected to remain. An isolated concrete channel in brush is what the surviving fragment of a complete station looks like — the missing pens are not evidence against.
Source: USDA Bureau of Animal Industry Circular 183 (1911), repeated in Circular 207 (1912). Field locally with full text and SHA-256.

Scale plan of a complete 1911-specification station, drawn from the federal instructions. Every dimension is quoted from USDA Bureau of Animal Industry Circular 183 (1911), repeated in Circular 207 (1912). Solid = concrete; hatched = timber and iron.

Second visit: the base hypothesis, and two new finds

A return visit (2026-08-07) added two observations: a **weathered timber post with wire** standing near the structure, and **rusted pipe rails** running at its end. These are remnants of precisely the perishable components the materials table above predicts — pen and cover posts were timber set 3 ft deep; chutes and pens were railed. Their traces strengthen the station reading and weaken the lone-drainage-ditch reading.

The observer also asked the right structural question: **could the visible concrete be the BASE of a full-size vat, with a larger structure above it now gone?** The spec answers this quantitatively, because the vat TAPERS — 26 ft at the rim, 12 ft at the floor. Length is a function of height:

Observed length	Height above vat floor (from the taper)
12 ft	0 ft — the floor itself
15 ft	1.4 ft
17.5 ft	2.6 ft
20 ft	3.7 ft
26 ft	6.5 ft — the original rim

The reported 15–20 ft is not a mismatch with the 26-ft specification. It is the specification, read 1.4–3.7 ft up the taper.


That is exactly what the lower portion of a spec vat measures when the upper 3–5 ft of wall — timber-framed above the concrete, or concrete since broken away — no longer exists. Period practice included part-height concrete with timber framing above; either variant leaves this footprint. The reconstruction below draws the surviving band solid and the interpreted portion ghosted, because they are different kinds of statement.

Falsifiable, both ways: a probe finding concrete floor 3–4 ft below present grade CONFIRMS this reading. A floor at under 2 ft REFUTES it. One caveat is stated on the figure: reported width (3–4 ft) runs slightly wide of the taper's 1.8–2.4 ft at that height — widths were estimates, not measurements.

Could the observed concrete be the base of a full-size vat?

Longitudinal section, to scale. The 1911 vat tapers, so OBSERVED LENGTH DEPENDS ON SURVIVING HEIGHT.
Solid = observed in the field. Ghosted = INTERPRETED reconstruction from the federal spec. They are not the same kind of statement.

- Also found on site, and where they fit:
- WEATHERED TIMBER POST with wire — the spec's pens and cover posts were timber set 3 ft deep, fenced with wire and rails.
 - RUSTED PIPE RAILS — consistent with chule or pen railing at the structure's end.
 - These are remnants of exactly the perishable components the materials argument said should be missing or nearly gone.
 - Finding their traces STRENGTHENS the station reading and weakens the lone-drainage-ditch reading.

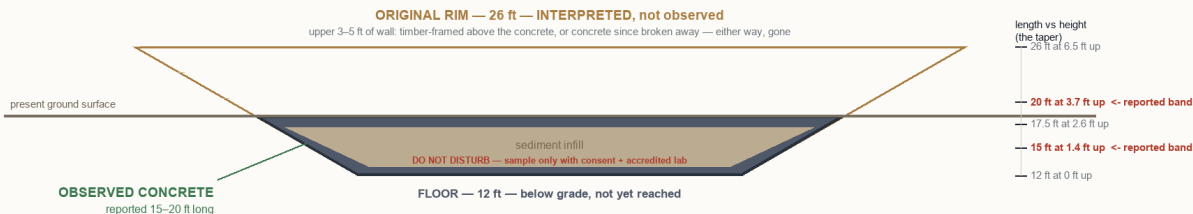

WHAT THIS RECONSTRUCTION IS, AND IS NOT

The solid band is the field observation. Everything ghosted is INTERPRETED from USDA Circular 183 and is testable, not established.
DEPTH IS STILL UNMEASURED. A probe finding concrete floor 3–4 ft below present grade CONFIRMS this reading; a floor at under 2 ft REFUTES it.
Reported width (3–4 ft) runs slightly wide of the taper's 1.8–2.4 ft at this height - stated, not hidden. Widths were estimates, not measurements.

Sources: USDA BAI Circular 183 (1911) / 207 (1912), held with full text and SHA-256 · Field observations 2026-08-07, grade C, unverified

Longitudinal section, to scale. Solid = observed; ghosted = interpreted from USDA Circular 183. New finds (timber post with wire, pipe rails) listed on the figure.

What would resolve it — in priority order

#	Measurement	Why it decides	Vat if...
1	Depth to hard concrete floor, probe through soil and distance to seating points.	The single solid distance is seating points. Vats are deep 5 to 6.5 ft.	See 5 ft. cattle swim.
2	Width at rim and again as low as reachable; a ditch has parallel walls. Requires no digging.	Each dipper; a ditch has parallel walls. Requires no digging.	grows ~3 ft → ~1.5 ft
3	Photograph both ends separately	A vat is asymmetric: steep slide in, cleated ramp out.	Slide is uniform ramp the other
4	Look for an adjacent flat concrete	The drip pen slopes back toward the vat and is unmistakable.	able 36 in × 20 in 40 ft
5	Total length rim to rim, plus GPS coordinates and a scale object in frame.	Makes it more usable by any frame.	12 × 20 ft

Capacity check, once depth is known

Using the reported 15–20 ft × 3–4 ft footprint and the prismatoid volume the circulars themselves specify: a depth of 2 ft yields about 916 gal; 3 ft about 1,375 gal; 4 ft about 1,833 gal; 5.25 ft about 2,405 gal; 6.5 ft about 2,978 gal. The documented capacities are **1,470 gal** (Circular 183/207 concrete vat) and **2,088 gal** (Circular 174 swim vat). Depths at or above roughly 4 ft put the structure in the documented range; depths under 3 ft place it outside.

If it holds up

A suspected historic arsenical site is a regulatory matter with an established pathway. It should not be handled privately or by a contractor.

- **California DTSC** — the agency for suspected historic contamination. EnviroStor is their public system and shows no record for this area, which is itself a documented gap.
- **OC Public Works / Flood Control** — if the structure sits in or beside a county drainage easement, they hold the as-builts and the maintenance history.
- **Property owner consent** — LARMAC, the County, or Rancho Mission Viejo depending on parcel. This project's gate G10 already anticipates exactly this and requires consent plus an accredited laboratory.
- **Analyte suite:** arsenic *and lead*, plus DDT/DDE, toxaphene and PAHs. The lead ratio is what separates cattle-dip ground from orchard ground — dip ground carries arsenic without lead.

Statement class: field observation, unverified. **Provenance:** observer photograph and verbal dimensions, uncorroborated. Specifications quoted are A1 — USDA Bureau of Animal Industry Circulars 174 (1911), 183 (1911) and 207 (1912), held locally with full text and SHA-256 checksums.

This document does not assert that a dipping vat has been found, that arsenic is present at this or any location, that anyone has been exposed, or that any illness has any environmental cause. It records an observation and the measurements that would settle what it is. A single accredited laboratory result would outweigh everything in it.
LHDRS — Ladera Historical & Environmental Investigation · generated 2026-08-07