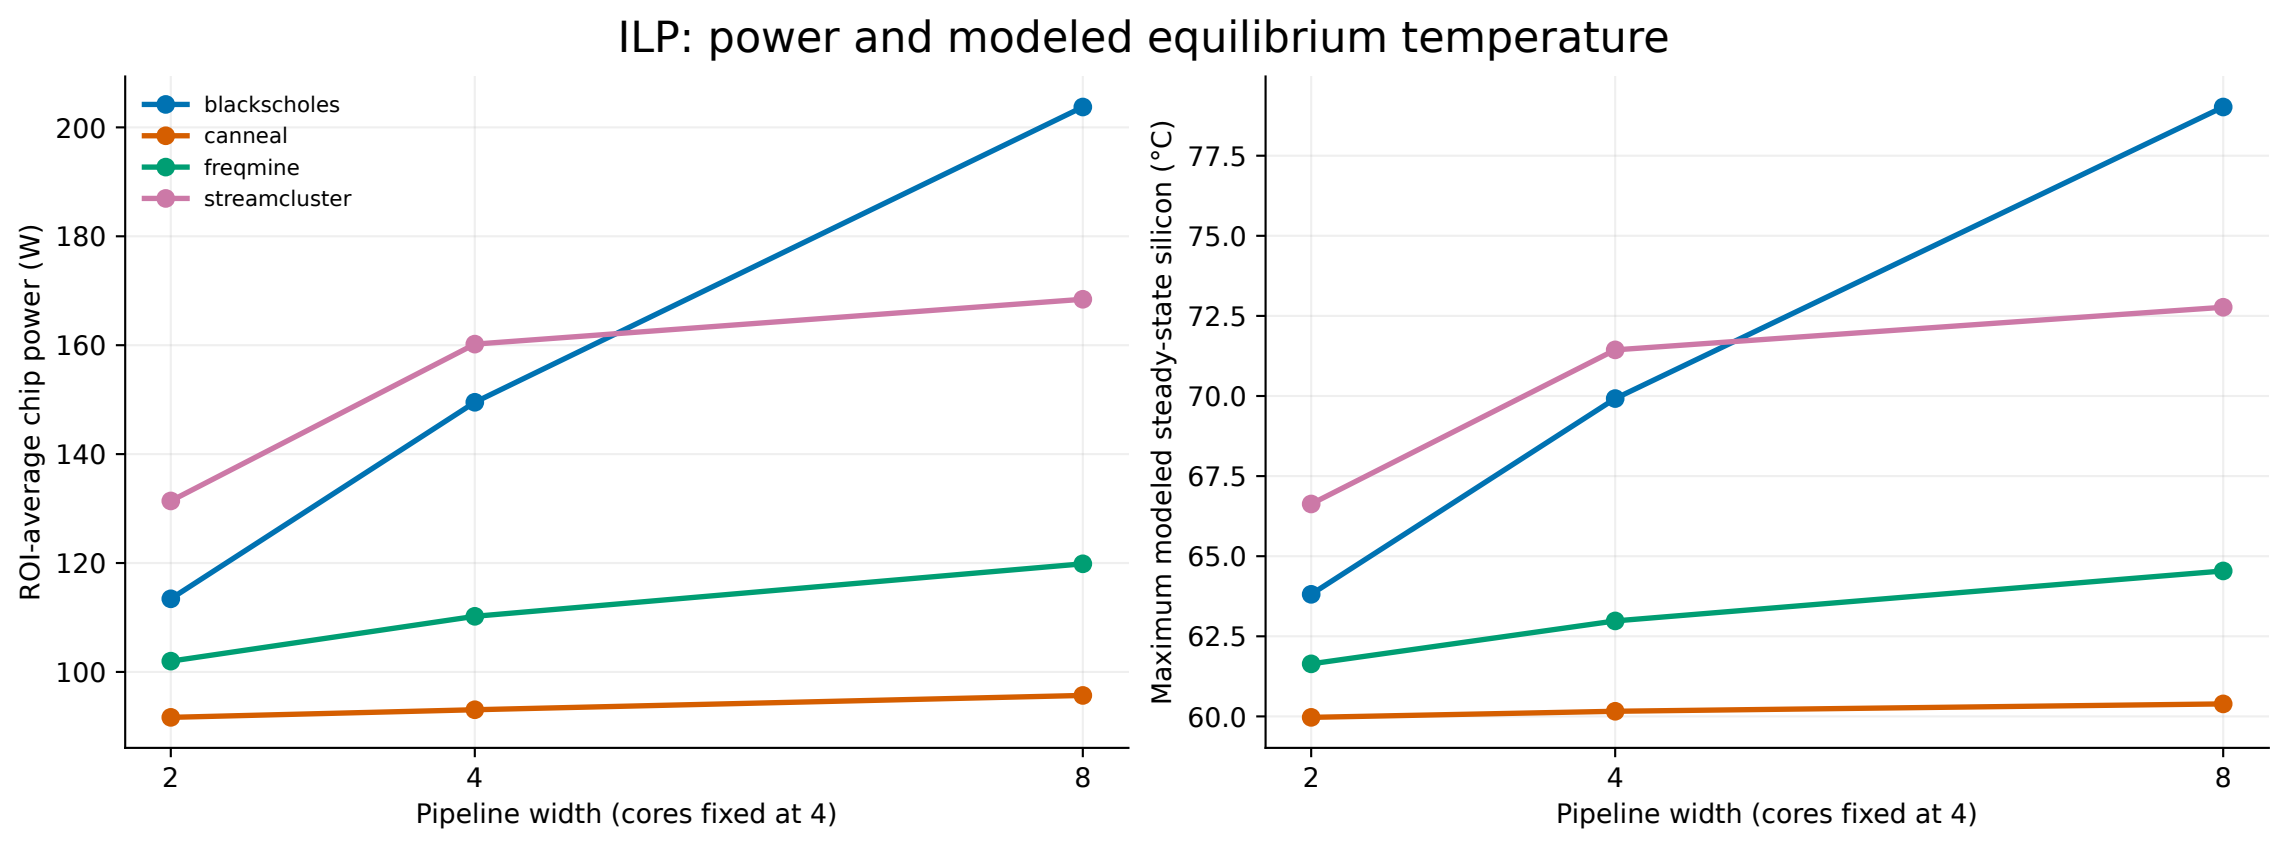
ILP: power and modeled equilibrium temperature
blackscholes
canneal
freqmine
streamcluster
ROI-average chip power (W)
100
120
140
160
180
200
2
4
8
Pipeline width (cores fixed at 4)
Maximum modeled steady-state silicon (°C)
60.0
62.5
65.0
67.5
70.0
72.5
75.0
77.5
2
4
8
Pipeline width (cores fixed at 4)