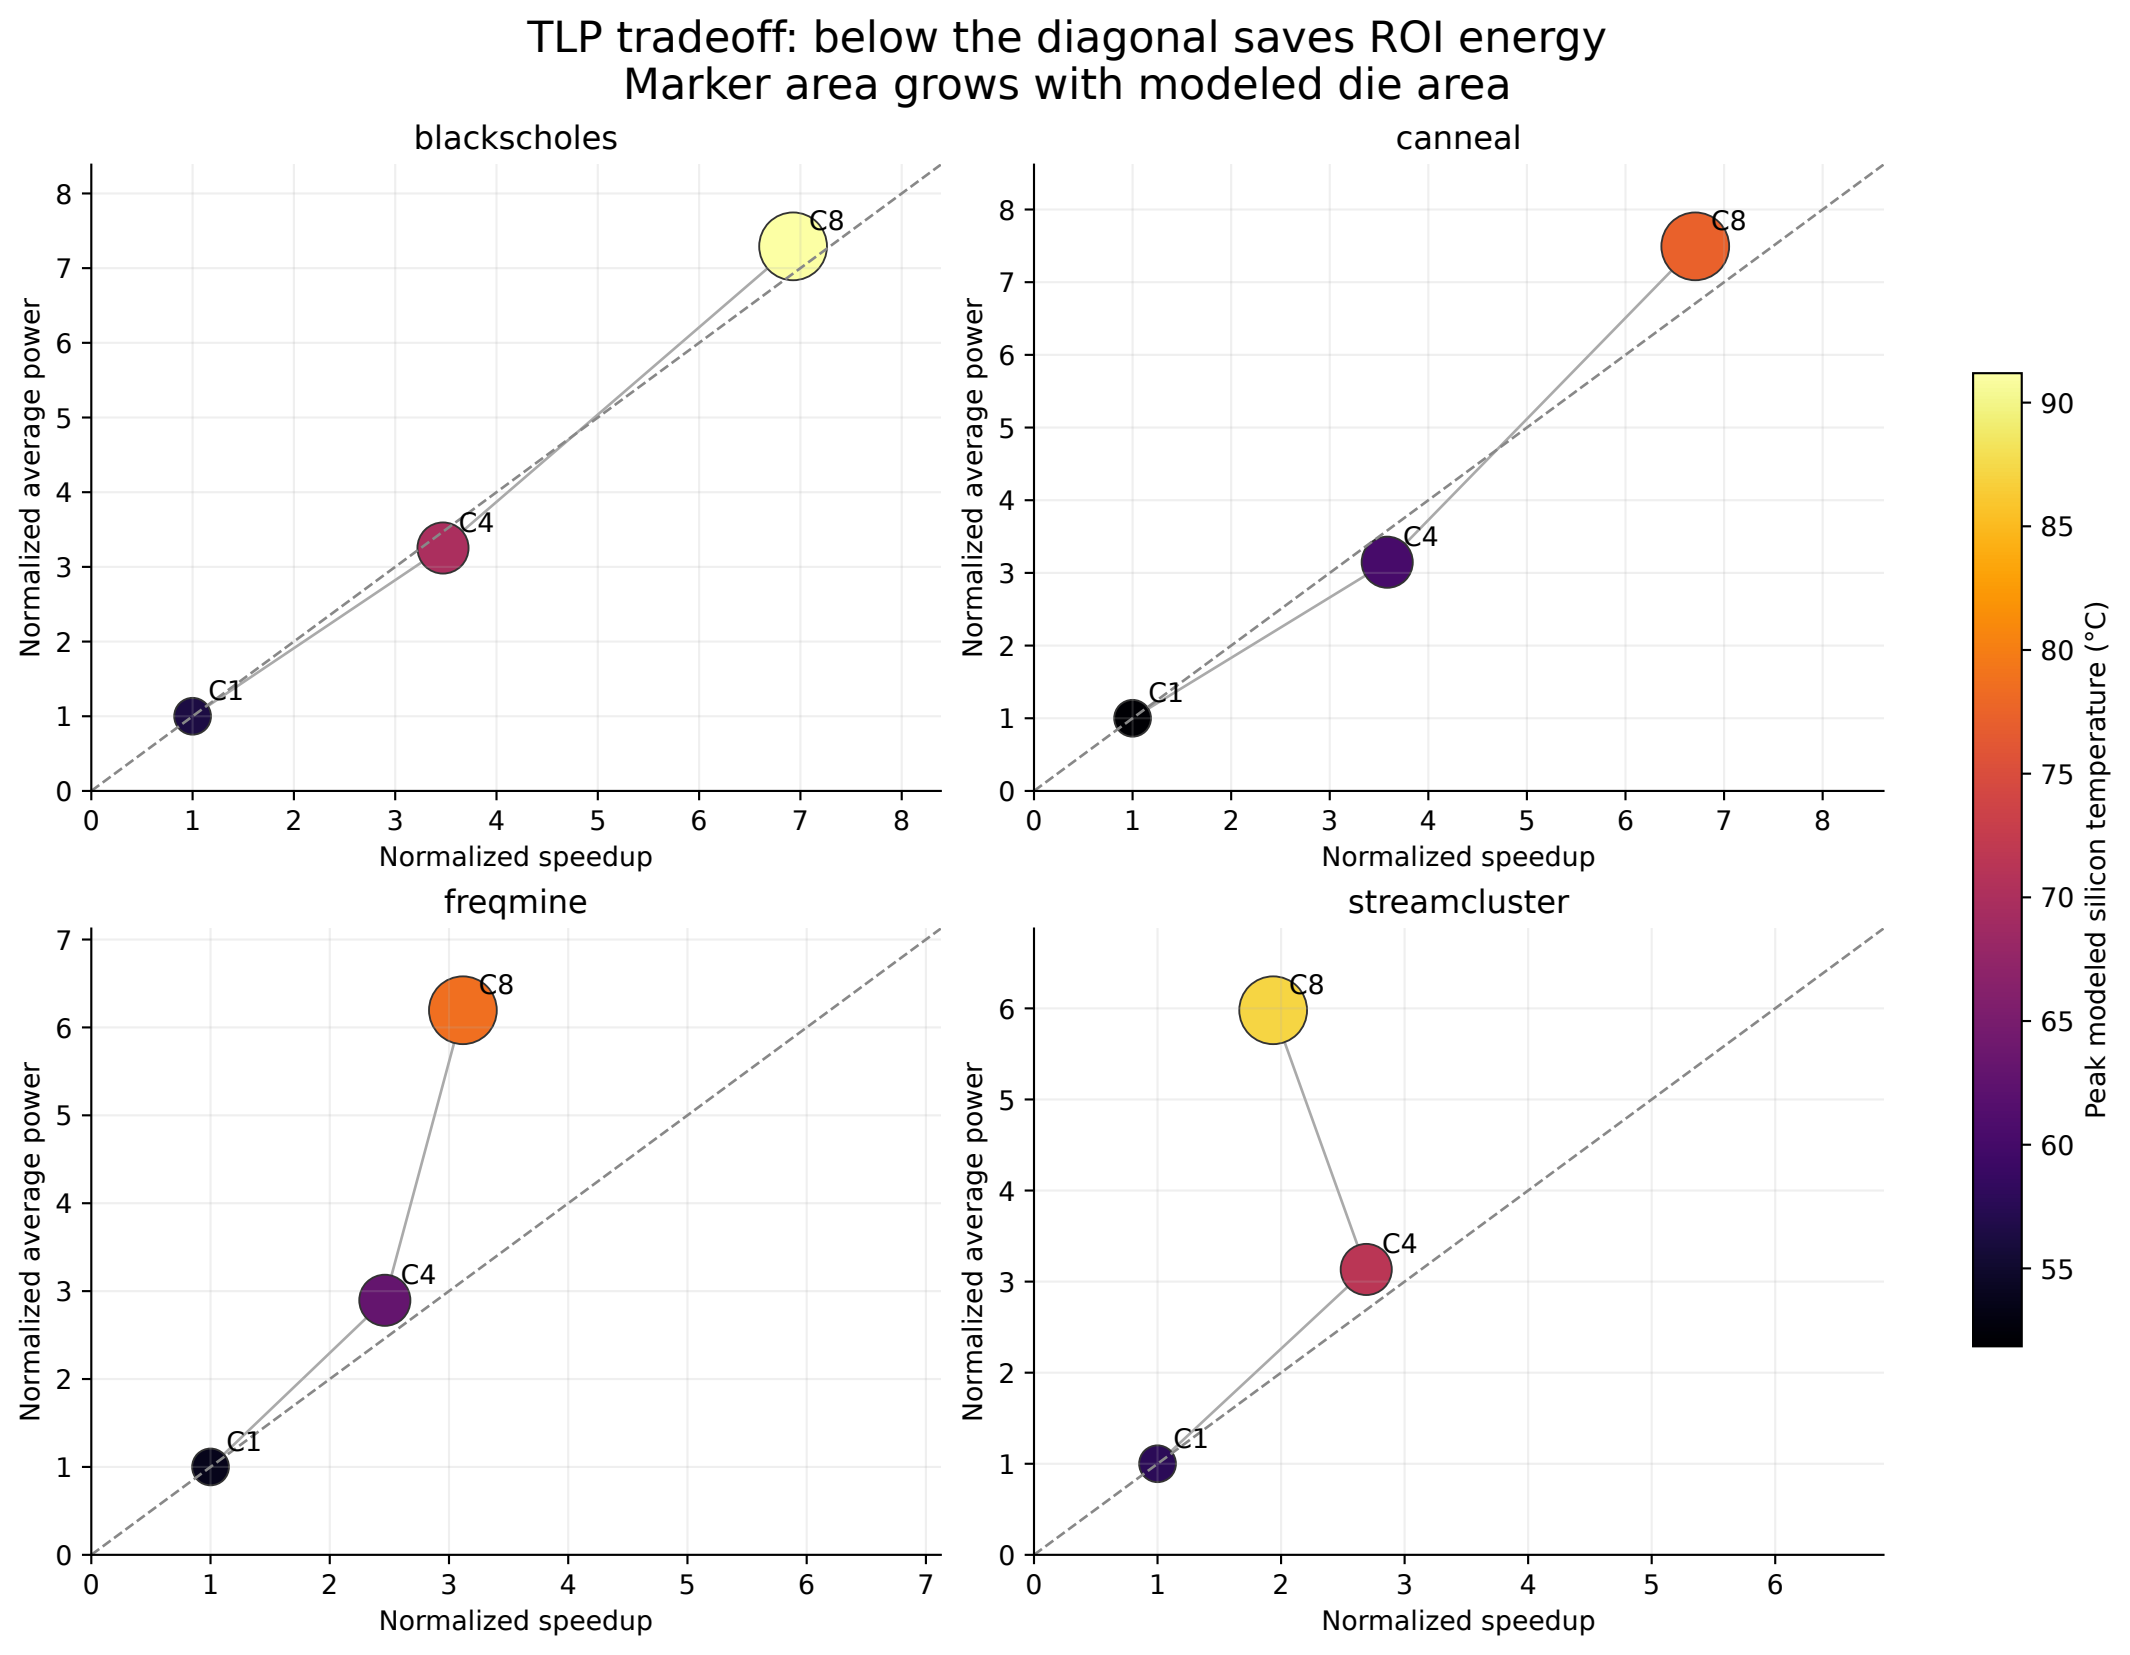
TLP tradeoff: below the diagonal saves ROI energy
Marker area grows with modeled die area
blackscholes
canneal
freqmine
streamcluster
C1
C4
C8
Normalized average power
Normalized speedup
Peak modeled silicon temperature (°C)